



A Phoenix Mecano Company



Test Probes





Our performance for **your success**

Areas of operation

- ▶ PCB terminal blocks and multi-connector systems
- ▶ DIN rail terminal blocks
- ▶ Test probes for PCB and cable test

Field of activities

PTR is responding to the globalisation of markets with an expanded distribution network. In over 50 countries worldwide, qualified personnel ensure that our products and services are always available to customers.



A Phoenix Mecano Company

Introduction

PTR has always produced quality. Since 1979, the name of PTR has stood for excellence and innovation in the field of terminal and testing technology. Thanks to our steadily expanding product portfolio, over the years we have acquired a significant share of the worldwide market for electromechanical components. Our merger with the Swiss firm of Phoenix Mecano in 1989 strengthened our worldwide presence.

For our customers, the excellent functionality, efficiency, precision and reliability of our products are the most important advantages. In addition, we set international standards by using German engineering, high-quality materials, flexible production processes and intelligent logistics. As a member of the Phoenix Mecano group, which operates worldwide, and through our other distribution partners, PTR test probes are always available in many countries.

Our customers use PTR test probes for a wide range of applications, including telecommunications, medical technology, aerospace technology and the automotive industry.

A company which offers first-class products and services cannot leave anything to chance, so the use of modern quality management systems is very important. This is why PTR implemented certification according to EN ISO 9001, and also according to TS 16949 in the automotive sector.

We believe that a successful enterprise must also demonstrate social responsibility. Consequently environmental responsibility is one of the cornerstones of our corporate philosophy, and we document this with certification according to EN ISO 14001. Of course, we also comply with all relevant EU directives, for example EU-RoHS (2002/95/EC) and REACH (1907/2006/EC) in their current versions.

PTR offers its customers a wide range of value-added products and services in the test probe sector. In addition to the standard range, we provide customised solutions including connectors and interfaces which are completely assembled with test probes and can be supplied on request in blister belts or with laser marking. We are happy to work closely with our customers and to create individual products for them.

All the information in this catalogue was compiled to the best of our knowledge and was correct at the time of printing. For the latest information, please visit our website at www.ptr.eu.

Content

	Page
Introduction	3
Content	4-6
PTR Website	7
PTR – Phoenix Mecano	8-9
Useful information on test probes	10-13
Tip styles	14-15
Component check	16-17
Lateral play	18
Innovative products	19

Series	Center	Extension height mm/ inches	Working travel mm/ inches	Max. travel mm/ inches	Page
Test probes for small centers					20
1001	30 mil/0.76 mm	5.50/.217	1.35/.053	2.00/.079	21
1002	40 mil/1.02 mm	5.30/.209	1.35/.053	2.00/.079	22
1003	40 mil/1.02 mm	5.30/.146	1.00/.039	1.30/.051	23
1005	40 mil/1.02 mm	10.5/.413	3.00/.118	3.80/.149	24
1006	40 mil/1.02 mm	16.76/.660	1.27/.500	2.29/.090	25

Standard test probes					26
1007	50 mil/1.27 mm	6.70/.264	2.40/.095	2.80/.110	27
1007.50	50 mil/1.27 mm	5.50/.216	1.35/.053	2.00/.079	28
1007.60	50 mil/1.27 mm	6.05/.238	2.54/.100	2.54/.100	29
1007.70	50 mil/1.27 mm	6.00/.236	1.27/.050	1.27/.050	30
1010	75 mil/1.91 mm	8.30/.327	2.40/.095	3.00/.118	31
1010.50	75 mil/1.91 mm	6.54/.258	2.54/.100	2.54/.100	32
1011	75 mil/1.91 mm	8.20/.323	4.40/.165	4.40/.165	33
1015	100 mil/2.54 mm	12.80/.504	3.50/.138	4.40/.173	34
1015.50	100 mil/2.54 mm	8.70/.342	4.20/.165	4.20/.165	35
1016	100 mil/2.54 mm	12.80/.504	3.50/.138	4.40/.173	36
1018	100 mil/2.54 mm	12.30/.484	3.50/.138	4.40/.173	37
1018.06	100 mil/2.54 mm	12.00/.472	2.70/.106	4.10/.161	38

ICT test probes					40
1008/E	50 mil/1.27 mm	16.0/.630	4.30/.169	6.40/.252	41
1008/E.50	50 mil/1.27 mm	21.30/.829	8.00/.315	10.00/.394	42
1012/E	75 mil/1.91 mm	16.00/.630	4.30/.169	6.40/.252	43
1013/Z	75 mil/1.91 mm	21.20/.835	12.00/.472	9.60/.378	44
Receptacles 1012					45
1025/E	100 mil/2.54 mm	16.30/.642	4.30/.169	6.40/.252	46
1034/E	100 mil/2.54 mm	19.90/.783	8.00/.315	10.00/.394	47
1034	100 mil/2.54 mm	19.50/.768	8.00/.315	10.00/.394	48
1036	100 mil/2.54 mm	19.50/.768	10.00/.394	12.00/.472	49
Receptacles 1025					50
2021• 1021	100 mil/2.54 mm	10.50/.413	4.00/.157	5.30/.209	51
2024• 1024	100 mil/2.54 mm	16.20/.638	8.00/.315	10.00/.394	52
2028• 1028	100 mil/2.54 mm	10.50/.413	4.00/.157	5.30/.209	53
2029	100 mil/2.54 mm	16.20/.638	6.40/.252	8.00/.315	54

Rotating test probes					56
1008/D	50 mil/1.27 mm	16.00/.630	4.30/.169	6.40/.252	57
1012/D	75 mil/1.91 mm	16.00/.630	4.30/.169	6.40/.252	58
1025/D	100 mil/2.54 mm	16.00/.630	4.30/.169	6.40/.252	59


Flying Probes					60
5248/G	100 mil/2.54 mm	19.60/.665	6.40/.252	8.00/.315	61
5257/G	100 mil/2.54 mm	14.60/.576	4.00/.157	5.30/.209	62

Series	Center	Extension height mm/ inches	Working travel mm/ inches	Max. travel mm/ inches	Page
Test probes for centers >100 mil					64
1030	3.00 mm	16.30/.642	5.00/.197	6.30/.248	65
1040	4.00 mm	19.60/.665	4.40/.173	5.50/.217	66
1041 / 1041W	5.00 mm	11.05/.435	4.80/.189	6.00/.236	67
1042	4.50 mm	13.30/.524	5.60/.221	7.00/.276	68
1050	4.00 mm	10.70/.421	4.40/.173	5.50/.217	69
1060	4.00 mm	10.70/.421	4.40/.173	5.50/.217	70
1051 / 1061	4.00 mm	10.20/.638	5.60/.221	7.00/.276	71
1054	4.50 mm	17.00/.669	5.10/.201	6.40/.252	72
1055	4.50 mm	16.50/.650	5.10/.201	6.40/.252	73
Test probes with thread					74
1007/G	1.27 mm	10.50/.413	4.00/.157	5.00/.196	75
1010/G	1.50 mm	8.30/.327	2.40/.095	3.00/.118	76
1015/G	2.54 mm	12.80/.504	3.50/.138	4.40/.173	77
1015/G Position test	2.54 mm	see list	3.50/.138	4.40/.173	78
1021/G	2.54 mm	10.50/.413	4.00/.157	5.30/.209	79
1021/G Position test	2.54 mm	see list	4.00/.157	5.30/.209	80
1028/G	2.54 mm	10.50/.413	4.00/.157	5.30/.209	81
1042/G	4.50 mm	13.30/.524	5.60/.221	7.00/.276	82
1060/G	4.00 mm	10.70/.421	4.40/.173	5.50/.216	83
1060/G Position test	4.00 mm	see list	4.40/.173	5.50/.216	84
1061/G	4.00 mm	16.20/.638	5.60/.221	7.00/.276	85
5110/G	4.00 mm	7.30/.287	2.80/.110	3.50/.138	86
Non-rotating test probes					88
1021/GV	2.54 mm	10.50/.413	4.00/.157	4.30/.169	89
2053	2.54 mm	18.20/.717	4.00/.157	5.00/.197	90
1053	5.00 mm	16.20/.638	4.00/.157	5.00/.197	91
1053/G	4.00 mm	see catalogue data sheet	4.00/.157	5.00/.197	92
Switching test probes					94
3010/2(G)• 3010/10(G)	4.00 mm	10.20/.402	4.00/.157	5.00/.197	95
3010/2(G)• 3010/10(G)	4.00 mm	10.20/.402	4.00/.157	5.00/.197	96
3010/2F	4.00 mm	10.20/.402	4.00/.157	5.00/.197	97
3010/2V	4.00 mm	10.20/.402	4.00/.157	5.00/.197	98
3020• 3020/2G	2.54 mm	9.50/.374	4.00/.157	5.30/.209	99
3020• 3020/2G	2.54 mm	9.50/.374	4.00/.157	5.30/.209	100
3030	2.54 mm	16.40/.646	5.00/.197	6.30/.248	101
3035	1.91 mm	9.30/.367	4.00/.157	5.00/.197	102
3010/2GW(5)	4.00 mm	10.20/.402	4.00/.157	5.00/.197	103
3010/2GW(5)	4.00 mm	10.20/.402	4.00/.157	5.00/.197	104
3011/2GS	4.00 mm	10.20/.402	4.00/.157	5.00/.197	105
3011/2GS	4.00 mm	10.20/.402	4.00/.157	5.00/.197	106
3012/2GS	4.00 mm	10.20/.402	4.00/.157	4.20/.165	107
3012/2GS	4.00 mm	10.20/.402	4.00/.157	4.20/.165	108
3012/2GS-FS1	4.00 mm	10.20/.402	4.00/.157	4.20/.165	109
3012/2GS-FS1	4.00 mm	10.20/.402	4.00/.157	4.20/.165	110
3014/2G	4.00 mm	9.20/.362	4.00/.157	5.00/.197	111
3020/2GW5	2.54 mm	9.50/.374	4.00/.157	5.30/.209	112
3020/2GW5	2.54 mm	9.50/.374	4.00/.157	5.30/.209	113
3023/2GS	2.54 mm	10.40/.410	4.00/.157	5.00/.197	114
3024/2G	2.54 mm	9.20/.362	4.00/.157	5.00/.197	115
3030/GW3	2.54 mm	16.40/.645	5.00/.197	6.30/.248	116
3015	7,50 mm	1.10/.043	0.80/.0031	1.00/.039	117

Content

Series	Center	Extension height mm/ inches	Working travel mm/ inches	Max. travel mm/ inches	Page
Push-back test probes					118
5087	4.00 mm	23.50/.925	9.50/.374	10.00/.394	119
5104	4.00 mm	34.90/1.374	5.00/.197	7.00/.276	120
5265	3.00 mm	40.50/1.594	5.00/.197	5.50/.216	121
5203	2.54 mm	40.50/1.608	5.00/.197	5.50/.216	122
3028.01	2.54 mm	17.80/.700	4.00/.157	5.00/.197	123
High-current test probes					124
1021• 1021/G	2.54 mm	10.50/.413	4.00/.157	5.30/.209	125
1060• 1060/G	4.00 mm	10.70/.421	4.40/.173	5.50/.216	126
1075• 1075/G	4.50 mm	10.80/.425	4.40/.173	5.50/.216	127
Pneumatic test probes					128
4004/G	4.00 mm	8.50/.338	6.00/.236	10.00/.394	129
4004	4.00 mm	5.50/.217	6.00/.236	10.00/.394	130
4005	3.50 mm	5.50/.217	6.00/.236	10.00/.394	131
4006	3.00 mm	5.50/.217	6.00/.236	10.00/.394	132
4034	2.54 mm	10.50/.413	4.00/.157	5.30/.209	133
Battery probes					134
5082	6.50 mm	7.00/.276	3.20/.126	4.00/.157	135
5099	3.00 mm	5.50/.217	3.30/.130	4.00/.157	136
5099.04	3.00 mm	2.80/.110	1.00/.039	1.20/.047	137
5110	4.00 mm	7.20/.283	2.80/.110	3.50/.138	138
1064	2.54 mm	8.11/.083	1.27/.050	1.27/.050	139
5303	2.54 mm	---	0.70/.027	1.40/.055	140
5305	2.54 mm	---	---	1.00/.039	141
Coaxial test probes					142
5207• 5207/G	4.00 mm	7.20/.283	2.80/.110	3.50/.138	143
Interface pins					144
IF contacts + 1016	---	---	---	---	145
Tools					146-149
Accessories					149
Overseas representations					150
Distributors in Germany					151

www.ptr.eu

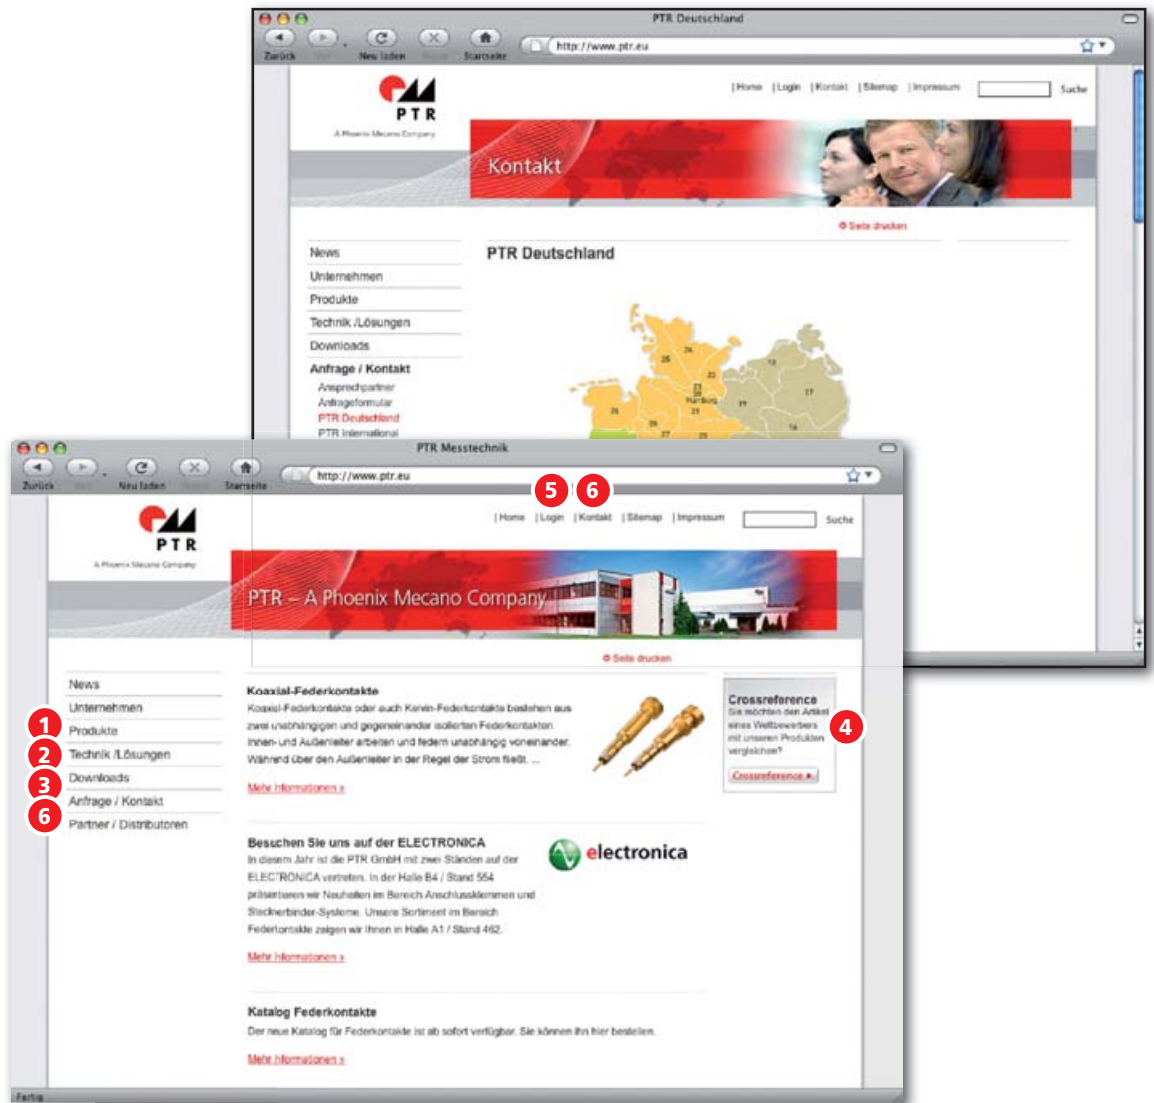

1 Products

- ▶ Product search with individual search criteria
- ▶ Product data sheets with technical drawings
- ▶ PDF output
- ▶ Cross-reference from stock
- ▶ Terminal blocks
- ▶ DIN rail terminal blocks
- ▶ Test probes

2 Technology/Solutions

- ▶ Background knowledge and more detailed information on our products

3 Downloads

- ▶ Catalogues
- ▶ Certificates
- ▶ Statements of conformity
- ▶ Brochures
- ▶ Press releases

4 Cross-reference

- ▶ Recoding of competitor article designations to PTR designations

5 Login area

- ▶ Premium service for registered customers

6 Contact

- ▶ Your contacts worldwide

Phoenix Mecano AG

The Group Phoenix Mecano is a global player in the enclosures and industrial components segments, has a streamlined operating structure and is a leader in many markets. Geared towards the professional and cost-effective manufacture of niche products, it helps to ensure the smooth operation of processes and connections in the

machine industry and industrial electronics. Its products are used in the mechanical engineering, measurement and control technology, alternative energy, medical technology, aerospace technology and home and hospital care sectors, amongst others.

Phoenix Mecano Group

- ▶ Gross sales approx. 500 million EUR
- ▶ Approx. 5,500 employees

The numbers relate to 2010.

You can find current figures on our Website:

www.phoenix-mecano.com



Enclosures

Standardised and customised enclosures made of aluminium, plastic and glass-fibre reinforced polyester and stainless steel, machine control panels and suspension systems protect sensitive electrical equipment and electronics in mechanical engineering and measurement and control technology applications. High-quality sandwich keyboards offer a reliable human/machine interface, even under extreme conditions.

Mechanical Components

Aluminium profiles, pipe connection systems, linear drives and conveyor components enable sophisticated systems for use in machine and equipment construction. Reliable, high-performance linear actuators and drive units for use in the home and care sector offer users a high level of comfort.

ELCOM/EMS

Intelligent concepts provide solutions for increasingly complex tasks associated with coding switches, inductive components and plug connectors, backplanes, transformers and power supply systems, circuit board equipment and the development of customised electronic applications right down to complete subsystems.

Phoenix Mecano Group locations around the world

North | South America

USA:

Springfield, Ohio
Shannon, Mississippi
Frederick, Maryland

Brazil:

Manaus, São Paulo

Europe | Africa

Great Britain:

Aylesbury

Spain:

Zaragoza

France:

Fontenay-sous-Bois

Benelux:

Deinze, Belgium
Doetinchem, Netherlands

Scandinavia:

Odense, Denmark
Ingelstad, Sweden

Germany:

Baiersdorf, Bermatingen, Bünde,
Burscheid, Eberswalde,
Grävenwiesbach, Kirchlingern,

Langenhagen, Marpingen,
Minden, Porta Westfalica,
Stuttgart, Villingen-
Schwenningen,
Werne, Wutha-Farnroda

Switzerland:

Stein am Rhein

Tunisia:

Ben Arous, Borj-Cedria,
Djebel El Quest-Zaghuan

Italy:

Inzago

Austria:

Vienna

Hungary:

Kecskemét

Romania:

Sibiu

Asia

Turkey:

Ankara

Russia:

Moscow

United Arab Emirates:

Sharjah

India:

Pune

Thailand:

Bangkok

Singapore:

Singapore

People's Republic of China:

Shenzhen, Shanghai

Taiwan:

Taipei

South Korea:

Seoul

Australia

Australia: Victoria

Strong together – Products manufactured by the corporate group



1) High-quality aluminium-profile technology used in a wide variety of applications

2) Membrane keyboard with improved surface feel and also with 2D lighting. Used in commercial vehicle service keyboards, tool operation systems and the catering industry

3) Explosion-proof push-button station for applications in chemical and petrochemical environments

4) Single drive including control system with variable-voltage switching power supply for worldwide use

5) Ultra-compact double drive for adjustment of seating and reclining furniture

6) Linear units and electric cylinders cover the many and varied demands associated with automation: control, adjustment, positioning or uniform operation

7) Toroidal transformer for solar inverter. Precision windings for maximum efficiency and unbeatable quality

8) High-performance filter choke for solar inverter applications, featuring high gain and frequency stability

9) Production of toroidal tape-wound, air gap and split-tape cores made of high-permeability silicon-iron alloys

10) VPX-backplane for serial high-speed transmission at up to 5 Gbit / s (PCI Express / SATA / USB 3.0 / Rapid IO / USB 3.0 / 10 Gbit Ethernet)

11) Universal plug-in card for control, measurement and supervision of power supplies via USB and Ethernet

12) Ultra-small rotary coding switches are used in a variety of ever-smaller electrical engineering applications

13) This assembly is representative of a whole range of controller boards for high-precision analysis technology in the fields of pharmaceuticals, biotechnology, life science, chemicals and environmental analysis. These functional units are used for the control and monitoring of the system sensors and microdosing units

14) Spring contacts in plastic frames for use in interface technology and as battery-charging contacts

Useful information on test probes

Test probes

Test probes are used for the electrical testing of PCBs, components and wiring fields. When employed in special test modules, the probes can be used to test connector-cable systems. The test probes can also be used in control engineering units or as a charging contact.

Purpose/Design/Materials

See **illustration 1** for details of the typical design of the different function principles of PTR test probes.

Barrels

Barrels are made of bronze, brass or nickel silver. They are manufactured by either deep-drawing or milling tubing or solid rods. A gold plating ensures excellent contacting characteristics. A barrier layer provides very good protection against corrosion.

Plungers

Plungers are manufactured of hardened fine-grained steel for use in heavy-duty operating time situations. The emphasis is on tips with extra penetration, for example pointed tips. Aged copper-beryllium (CuBe) is the material used for the plungers when especially high demands are made of electrical conductivity for long-term constancy. With regard to environmental aspects, these are taken care of by the 100% wet-processing of the beryllium and by the coating on the plungers. Test probes with CuBe plungers are suitable for measurement tasks in the case of potential difference and for high-voltage applications. The brass plunger design with equally good conductivity is suitable for low-wear applications, e.g. charging contacts with very short travel and non-aggressive tip styles.

Alternatively, the plungers are fitted with different improvement coatings which, in addition to the electrical conducting and contact characteristics, are intended to satisfy specific requirements in respect of abrasion resistance and corrosion protection.

Hard gold

Hard gold has a passive surface, so it is an ideal electrical contact partner with very good chemical resistance. The special gold alloy, with a micro hardness of up to 400 HV, is much harder than pure gold, but there are limits with regard to wear behaviour. The abrasion behaviour can be influenced positively if the conditions of use are optimised, for example by the avoidance of radial movements.

Rhodium

Rhodium is one of the platinum metals. A very high level of wear resistance is achieved because of the very high degree of hardness of up to 1000 HV. However, because of the stored oxygen, a higher level of layer brittleness must be expected. This problem can be reduced by means of a special layer build-up and reduced layer thicknesses. However, rhodium plating is unsuitable when heavy impact loads are involved. If the brittle and very thin rhodium layer is damaged, this may have a negative effect on the initially good electrical contact characteristics.

Nickel

A distinction must be made between galvanically deposited nickel and chemical nickel (deposited without the use of electricity).

Galvanic nickel

Galvanic nickel is used as an intermediate layer underneath the respective surface layer. The aim is to prevent material transfer between the base material and the surface layer, and also corrosion.

For barrels and receptacles, a high level of ductility for good formability with very good adhesion of the layers is achieved by means of suitable settings for the galvanic deposition bath.

Chemical nickel (electroless nickel plating)

Chemical nickel is distinguished by even layer deposition with excellent contour accuracy, which is especially advantageous for the function of pointed tips and sharp-edged tip styles. This nickel-plating has a micro hardness of approx. 600 HV, which can, as an option, be increased to 1000 HV and more by means of subsequent heat treatment. This is accompanied by very good wear resistance. Maximum corrosion resistance is achieved by the intercalation of phosphorus. However, the resulting inactive surface does not result in such good contacts as those of gold or rhodium.






Springs

For the most part, springs are manufactured of spring steel wire of the maximum strength category with a special surface finish. The working temperature range for these springs between -30°C and +120°C also determines the operating temperature range for the complete spring contact probes. High-strength stainless steel wire is used with higher temperatures up to +200°C and when increased demands are made of corrosion protection. However, with this wire, it is not possible to achieve such high strength or spring force values as with spring steel wire.

Normally, gold is used as a surface plating because it reduces wear and improves the contact characteristics. The coating is applied in such a way that the structural characteristics of the high-strength spring material are affected as little as possible. In special cases, the springs are silver-coated (improved conductivity) or stainless steel springs are not given an additional coating.

The rated spring force of the spring contact probes refers to the working travel, which, as a rule, is 4/5ths of the maximum permitted plunger stroke travel.

Test probes design

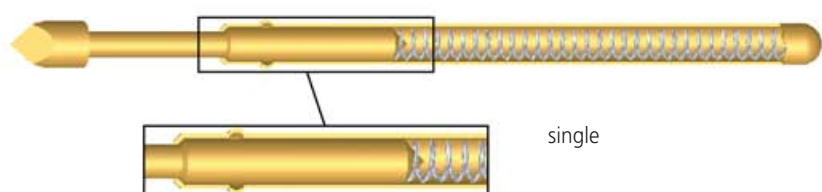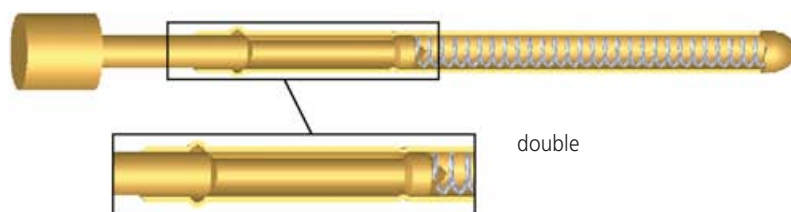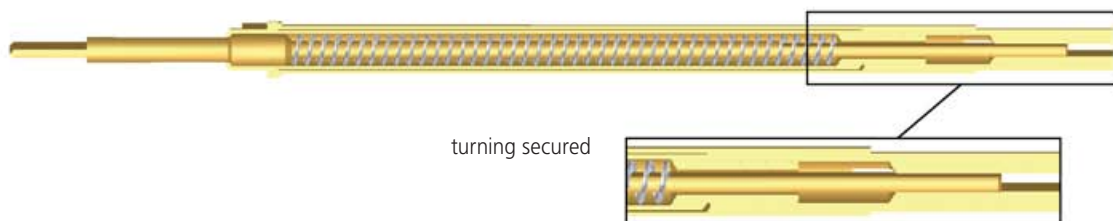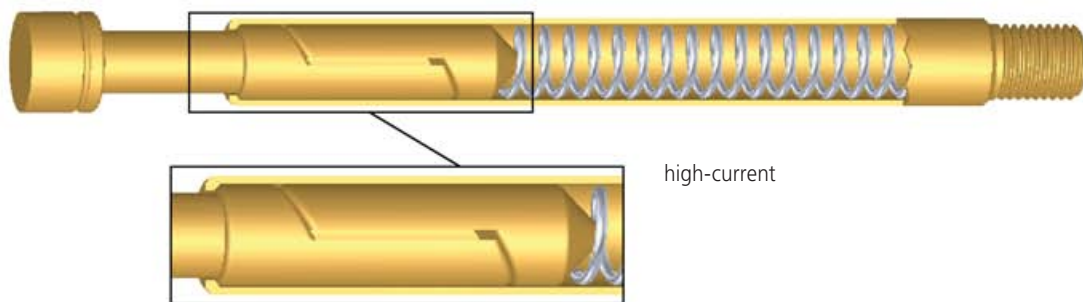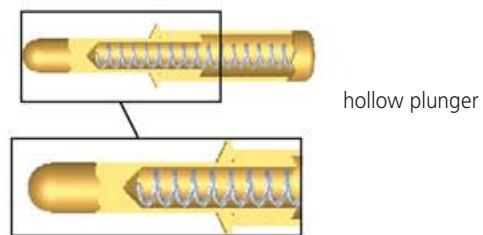

Illu. 1: Test probes and plunger guide

Useful information on test probes

Receptacles

Receptacles are fitted firmly in the relevant probe location boards in order to permit the replacement of the spring contacts without wiring work when the limit to the operating life (-> which see) is reached. Various receptacle types are available for the wiring in the adapter (illustration 1). Bronze, nickel silver or brass are used as the base material. Gold plating ensures good electrical properties, with nickel underneath for corrosion protection.

Assembly holes

In order to achieve an optimal fit of the receptacles in the probe location board, the assembly holes must be drilled very carefully. The drill diameters listed in the data sheets for the individual series are the values based on our experience. These guideline values are dependent on the following conditions:

- ▶ use of hard metal drills
- ▶ rpm of the drill tool 26,000 ... 35,000 rpm
- ▶ advance 0.6 ... 0.8 mm/min
- ▶ material as described in the data sheet
- ▶ probe location board thickness 10.0 mm
- ▶ drilling under vacuum swarf removal device

Deviations from these influencing variables may result in other drill diameters. Trial drillings are recommended in every case.

Quality and operating life


When in use, test probes are subjected to high demands in respect of function and operating life. From development to dispatch, the manufacture of PTR test probes takes place in accordance with optimised procedures. A quality assurance system according to EN 29001/DIN ISO 9001 guarantees process security. Tests are carried out by means of load change tests in order to optimise materials and the constructional design of test probes. Functional capability and operating life are subjected to continuous monitoring in our reliability testing facilities.

As a rule, the maximum operating life of a test probe depends on the following factors:

- ▶ as low a spring force as possible in relation to the spring diameter and stroke travel
- ▶ correct axial load, avoidance of shear forces
- ▶ maintenance of the recommended working travel
- ▶ precise and gentle insertion of the test probe into the receptacle
- ▶ avoidance of harmful external influences e.g. soiling, high moisture content of aggressive media, high temperature load
- ▶ contacting only in current-free or zero-potential state
- ▶ as low a current load as possible


Of course, the level of actual durability also depends on the requirements of each user, e.g. limit values for continuity resistances, degree of soiling, or operating characteristics.



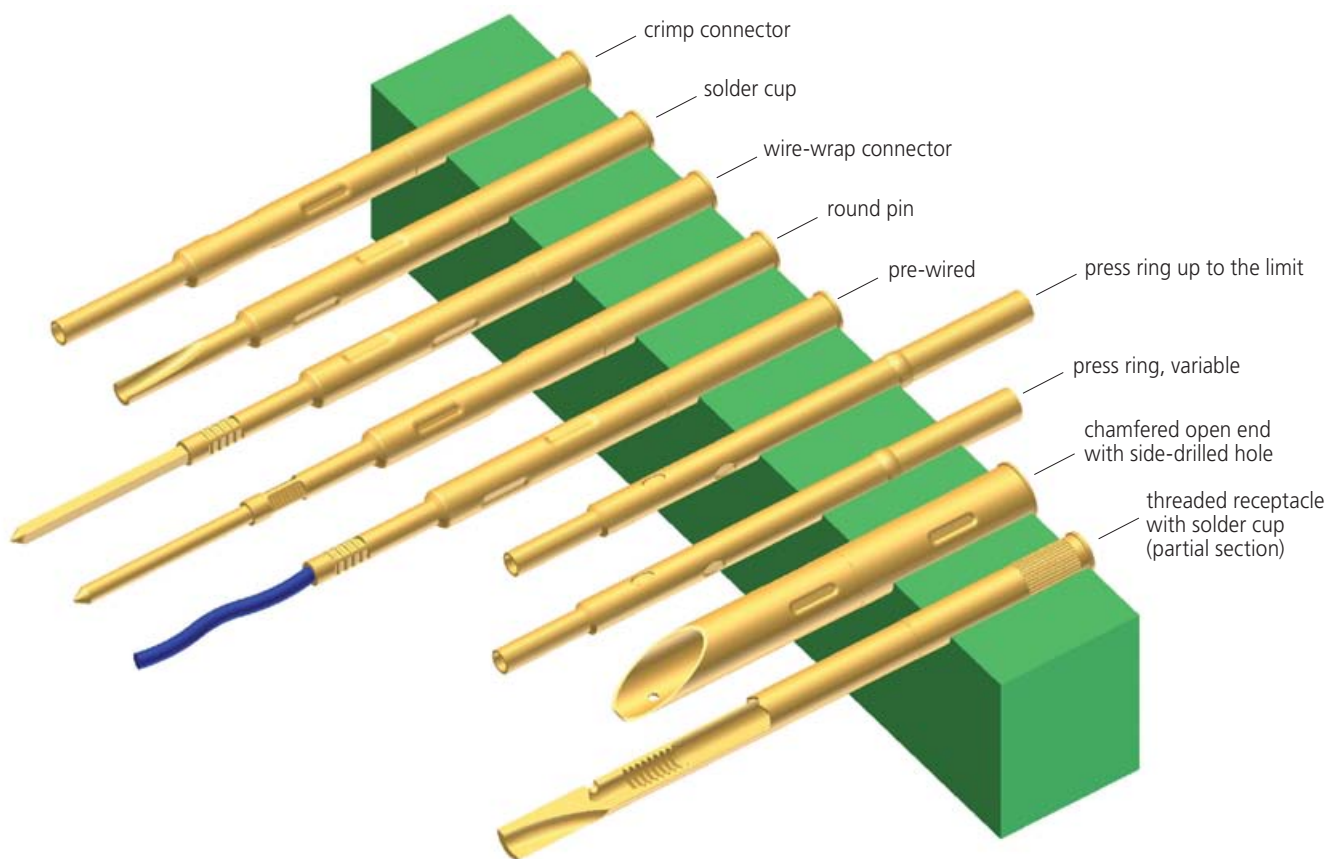


Illu. 1: Types of Receptacles

Tip styles



Form A **90° Concave**

For connector pins, wire-wrap pins and straight / curved terminals. To be used under clean conditions because contamination can cause failures.




Form A6X **90° Concave, self-cleaning**

For connector pins, wire-wrap pins and straight / curved terminals. The head has special grooves that protect the contact area from contamination.



Form B **30° pointed tip**

For strip conductors, throughplating, soldering points and test pads.




Form BST **Steel Needle**

A sharp steel needle with a long implement life for reliable penetration of flux and dirt on uncleaned printed boards or component groups and for SMD contacts.



Form BST3 **Tri-Needle**

Three-needle form of very aggressive character for reliable penetration of flux and dirt on uncleaned printed circuit boards.




Form C **Serrated**

A universal head for straight or curved component leads, wire-wrap posts and connector pins.



Form CS **Serrated with overlapping plastic insulation**

Presence test of component legs. The overlapping plastic insulation avoids electrical contact when connector pins are missing.



Form D **Round Head**

Used to test circuits or gold pads. Do not leave marks on the test area. Also used for testing sockets in connectors.




Form E **90° Convex**

Plated-through holes, pads and lands or sockets in connectors.




Form EB **Press Fitted Steel Needle**

Very aggressive and robust steel needle. Especially designed for testing contaminated areas.



Form F **Flat head**

Especially for gold pads and convex areas, cleaned contact points. Avoids marks on the contact area.



Form G **Four-point crown**

For component leads, soldering points and test pads, when there is no strong contamination.




Form H **Pyramid**

Plated-through holes and pads. The sharp edges cut through oxides and contaminants.




Form K **Star**

See tip style "H", but with higher contact penetration. Used also for rotating test probes. It cuts through oxides and contaminants.



Form M **Tulip with overlapping middle edge**

The combination of crown and central tip ensures contact reliability at almost all test points. Overlapping middle edge is fixing the head.




Form M1 **Tulip**

The combination of crown and central tip ensures contact reliability at almost all test points.




Form N **Three point crown - self-cleaning**

Designed to test contaminated printed circuit boards. The special cut of the tip allows contaminants to fall out easily.



Form Q **Four-point crown - self-cleaning**

Designed to test contaminated printed circuit boards. The special cut of the tip allows contaminants to fall out easily.




Form Q8 **Eight-point crown, self-cleaning**

Designed to test strong contaminated component legs. High centering efficiency.



Form V **Chisel**

Tip with extra penetration of open and closed throughplating, and for level contact surfaces. Penetrates flux and dirt.



Form D1xxx **Round head**

Designed for position test of sockets in connectors.




Form Y **Spade**

For application with test probes in connector systems.

Component check

Component check in the in-circuit test

Series 1025 with tip style C2S is designed for the component check in the in-circuit test. The tip of the spring contact is fitted with a plastic insulator; this prevents electrical contact if the component is not present or is incorrectly positioned.

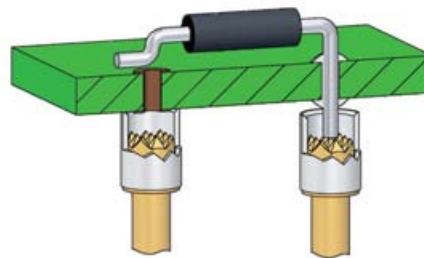



Component check with switching test probe

As a rule, PTR switching test probes operate on the "closer principle". Switching test probes can be seen as "axial micro-switches" which, according to a defined switching travel, create an electrically conducting connection between the inner conductor and the outer probe of the switching test probe.

In addition to a large number of metal tips, PTR also offers versions with insulated tips. These can be supplied as a full-plastic tip and, for improved wear resistance, as a metal tip insulated against the plunger. PTR also offers a so-called "neutral switching test probe" in the version with a plastic tip and hard-wearing protective metal ring.

Application/features:


- ▶ check on presence of components or connectors, principally for the cable test, e.g. to check secondary locking
- ▶ potential-free contacting by means of the above-mentioned insulating tip versions
- ▶ the extension height on special screwed versions is variably height-adjustable by 5.0 mm.

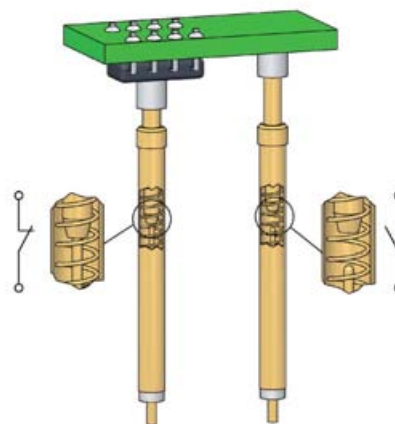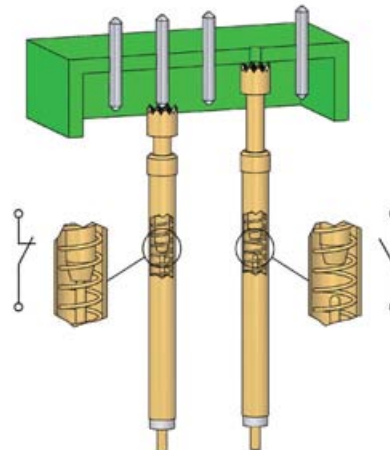

Checking for bent pins

In order to recognise bent plug pins, special tips are fitted with insulating caps which prevent electrical contact with the tip and generate an error message.

The dimensions and shape of the insulation cap and tip plunger are designed to match the geometry of the relevant connector.

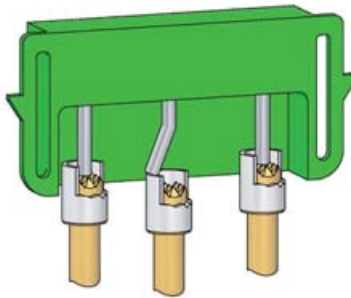


Position test/push-back check

Test probes for the position test check the correct position of contacting elements in connectors (passive push-back test).

In contrast to this, during the active push-back test a high defined force is applied to the contacting elements by means of a push-back test probe. This provides a mechanical check on the locking of the contacting elements in the connector and, in the case of an error, evaluates an electrical interruption.


The tips are matched to the relevant connector geometry. PTR offers a wide range of different shapes and dimensions.

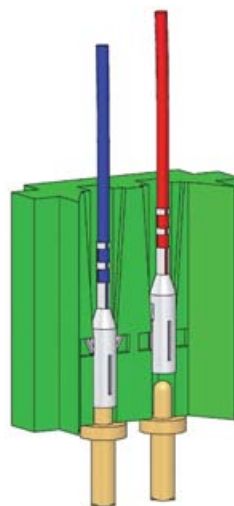

Switching test probes with easy-replacement system

The PTR easy-replacement system for switching test probes makes it possible to replace the test probe without releasing the wiring. In this case, the wiring takes place directly on the insulated connection piece of the easy-replacement threaded receptacle which remains in the test module during replacement of the test probe.

The test probe and receptacle are fitted with a matching sprung plug-in system which creates secure, electrical contacting. At the same time, this makes possible faster replacement of the test probe, which contributes to a reduction in servicing times.

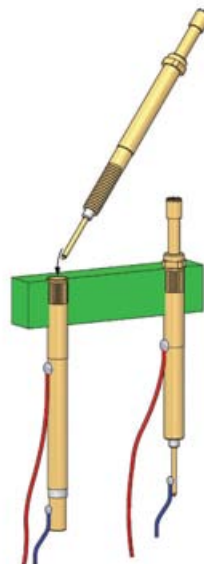

Lateral play

Test point accuracy


The test point accuracy which can be achieved is determined by the tolerances in the adapter (play, displacement of the receptacle drill holes), the deviations of the test points and the lateral play of a fitted spring contact probe. This occurs as a result of the play between the plunger and receptacle required for the plunger movement and also of manufacturing tolerances. The amount of lateral play at the plunger tip is also dependent on the length of the plunger in relation to the effective plunger guide length.

Shear forces which deflect the spring contact probe during use also affect the amount of lateral play.

Optimal pinpointing is achieved by a combination of spring contact probes with the shortest possible travel, double plunger guides and minimal adapter tolerance, or even the use of plate guides.

Cable test

Specially for the cable test, PTR offers a wide range of switching test probes, test probes with thread and push-back test probes with a large number of different tip styles and dimensions.

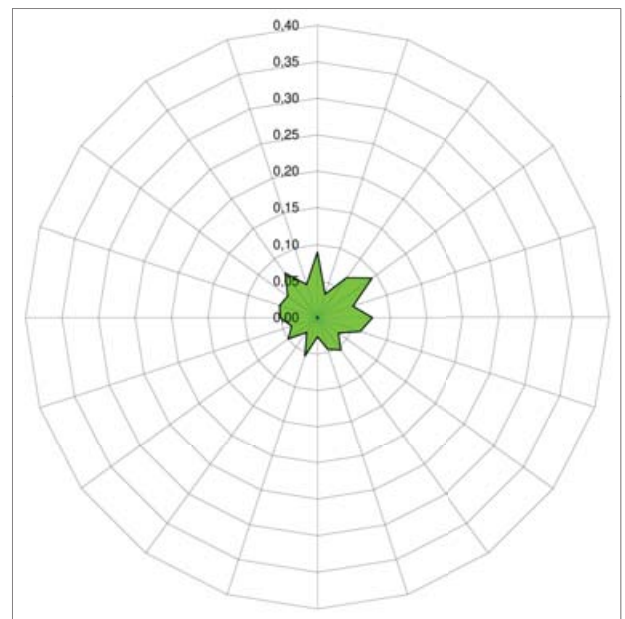

Test point accuracy (mm)

Innovative products

PTR offers a wide range of test probes. Switching test probes and Screwing test probes with threads for the cable test, test probes for PCB test (ICT and FT), battery contacts and interface pins, high-current test probes for run-in or burn-in tests, pneumatic test probes for functional tests. For every application we will find the suitable solution, that's what we are strong for.



Switching test probes



Pneumatic test probes



Coaxial test probes




Battery test probes

Series	Center
1001	30 mil/0.76 mm
1002	40 mil/1.02 mm
1003	40 mil/1.02 mm
1005	40 mil/1.02 mm
1006	40 mil/1.02 mm

Test probes for centers of 30 mil (0.76 mm) and greater

Test probes with centers of 30 mil (0.76 mm) and greater have been designed for applications with very small centers. In some cases, the diameters are extremely small, and the receptacles for these test probes are supplied with pre-assembled wires (AWG 30). The length and colour of the connection wires can be selected as required. When these test probes are used in the test adapters, a guide plate is normally inserted in order to prevent misalignment and damage to the test probe plunger and to optimise the point of contact accuracy.

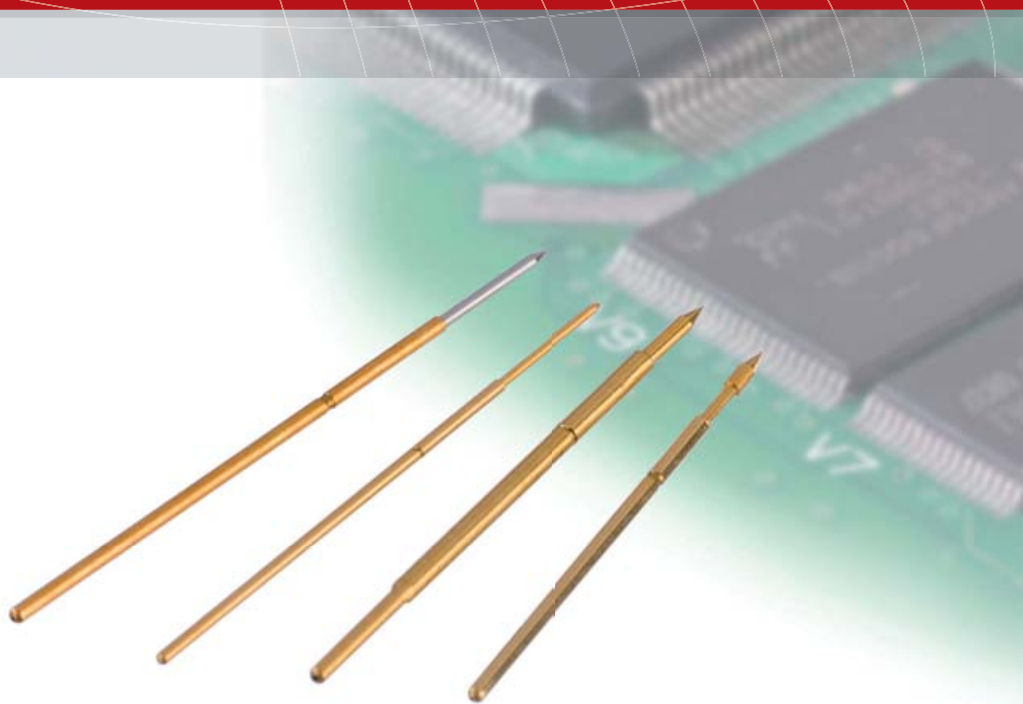

Series 1001

- Test probe for 30 MIL spacing
- Short travel
- Low contact pressure
- Receptacle pre-wired

Tip style · Diameter · Plating


G3

0.28 Au

Mechanical Data

Center	0.76 mm/30 mil
Full travel	2.00 mm
Working travel	1.35 mm
Pre-loaded spring force	0.13 N
Spring force at working travel	0.30 N

Electrical Data



Max. current rating	0.5 A
Typical continuity resistance	<= 150 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Stainless steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	0.53 mm
----------------------	---------

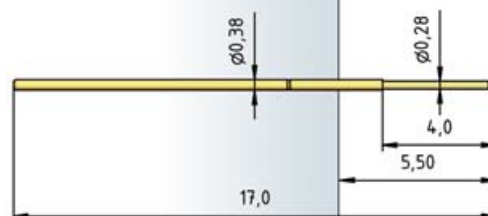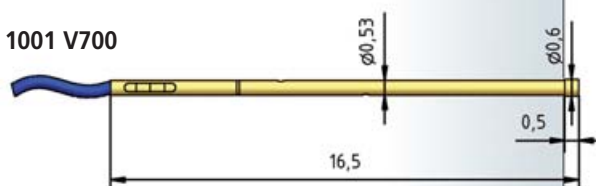1001

H 1001 V700


How to order:

1001 - G3 - 0.3 N - Au - 0.28

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1002

- Test probe for 40 MIL spacing
- Short travel
- Low contact pressure
- Receptacle pre-wired

Tip style · Diameter · Plating



B
0.37 Rh

Mechanical Data

Center	1.02 mm/40 mil
Full travel	2.00 mm
Working travel	1.35 mm
Pre-loaded spring force	0.25 N
Spring force at working travel	0.40 N

Electrical Data

Max. current rating	1.0 A
Typical continuity resistance	<= 100 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, rhodium-plated
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	0.63 mm
----------------------	---------

1002

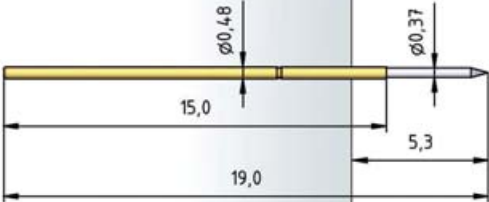

H 1002 V700

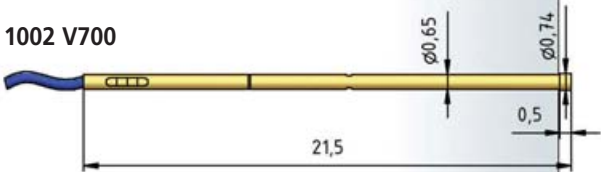

How to order:

1002 - B - 0.4 N - Rh - 0.37

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1003

- Test probe for 40 MIL spacing
- Short travel
- Low contact pressure
- Receptacle pre-wired

Tip style · Diameter · Plating



B

0.50 Au

Mechanical Data

Center	1.02 mm/40 mil
Full travel	1.30 mm
Working travel	1.00 mm
Pre-loaded spring force	0.40 N
Spring force at working travel	0.75 N

Electrical Data

Max. current rating	1.0 A
Typical continuity resistance	<= 100 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	0.63 mm
----------------------	---------

1003

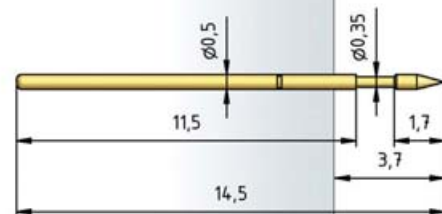

H 1003 V450

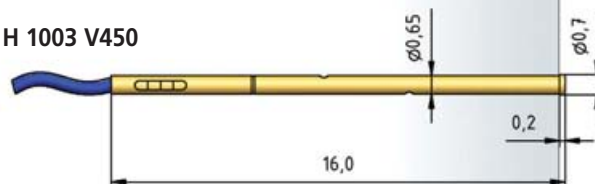

How to order:

1003 - B - 0.75 N - Au - 0.5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1005

- Test probe for 40 MIL spacing
- Short travel
- Low contact pressure
- Receptacle pre-wired

Tip style · Diameter · Plating



B

0.35C Au

Mechanical Data

Center	1.00 mm/40 mil
Full travel	3.80 mm
Working travel	3.00 mm
Pre-loaded spring force	0.20 N
Spring force at working travel	0.80 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	0.70 mm
----------------------	---------

1005

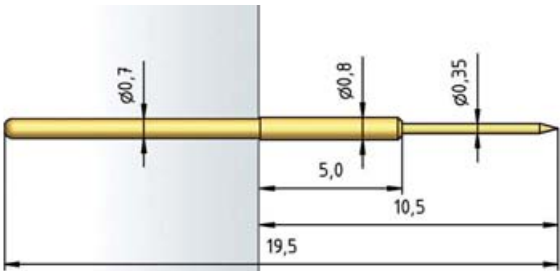

How to order:

1005 - B - 0.8 N - Au - 0.35 C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material

Series 1006

- Test probe for 40 MIL spacing
- Short travel
- Low contact pressure

Mechanical Data

Center	1.02 mm/40 mil
Full travel	2.29 mm
Working travel	1.27 mm
Pre-loaded spring force	0.17/0.15 N
Spring force at working travel	0.37/0.45 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 55 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Bronze/Stainless steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	0.69...0.70 mm
HGW 2372	0.72...0.73 mm

Tip style · Diameter · Plating

			
B	D	G	G3
0.53C Au	0.53C Au	0.53C Au	0.28C Au

1006

H 1006

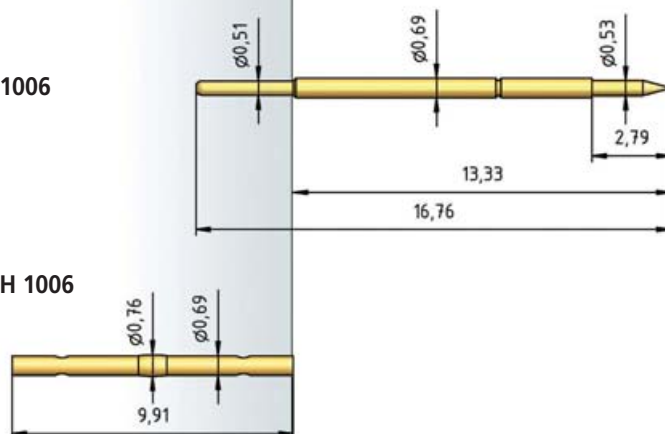

How to order:

1006 - B - 0.45 N - Au - 0.51C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series	Center
1007	50 mil/1.27 mm
1007.50	50 mil/1.27 mm
1007.60	50 mil/1.27 mm
1007.70	50 mil/1.27 mm
1010	75 mil/1.91 mm
1010.50	75 mil/1.91 mm
1011	75 mil/1.91 mm
1015	100 mil/2.54 mm
1015.50	100 mil/2.54 mm
1016	100 mil/2.54 mm
1018	100 mil/2.54 mm
1018.06	100 mil/2.54 mm

Standard test probes for centers up to 100 mil

The test probe series up to 100 mil consist of models with different sizes, travel and extension heights. This wide range of products allows multi-purpose use such as the testing of assembled components (in-circuit test or function test) or in other applications – wherever a flexible electrical connection is required.



Series 1007

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.27 mm/50 mil
Full travel	2.80 mm
Working travel	2.40 mm
Pre-loaded spring force	0.25/0.25/0.40 N
Spring force at working travel	0.70/1.00/1.70 N

Electrical Data

Max. current rating	1.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	0.86 mm
With pressed-in ring	0.93 mm
HGW 2372	0.88 mm
With pressed-in ring	0.94 mm

Tip style · Diameter · Plating




A	B	C	D	D
0.90 Au	0.49C Au	0.90C Au	0.49 Au	0.85C Au




H
0.90 Au
1.50 Au


1007

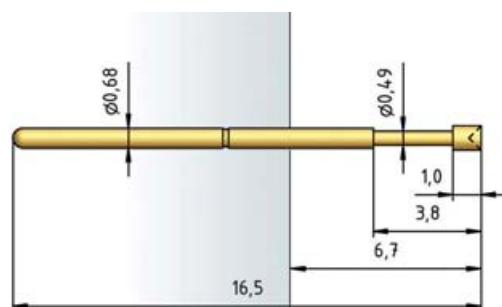

1007-C/H

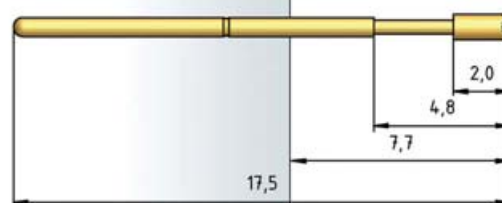

H 1007 C

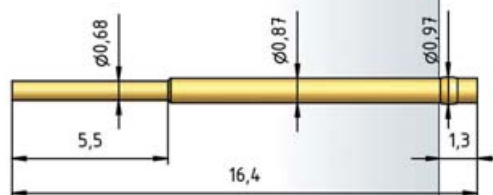

H 1007 L



How to order:

1007 - A - 0.7 N - Au - 0.9C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1007.50

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Tip style · Diameter · Plating



G3

0.51 Rh

Mechanical Data

Center	1.27 mm/50 mil
Full travel	2.00 mm
Working travel	1.35 mm
Pre-loaded spring force	0.35 N
Spring force at working travel	0.75 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	≤ 75 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, rhodium-plated
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	0.84 mm
HGW 2372	0.86 mm

1007.50

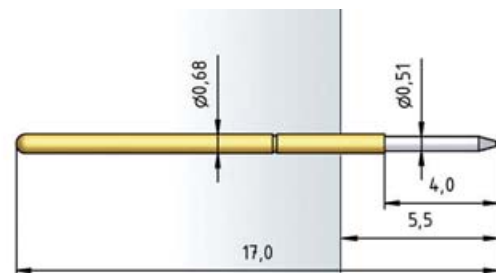

H 1007.50

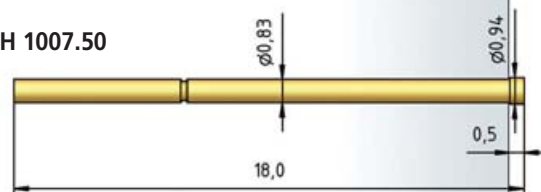

How to order:

1007.50 - G3 - 0.75 N - Rh - 0.51

1 2 3 4 5 6

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter

Series 1007.60

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.27 mm/50 mil
Full travel	2.54 mm
Pre-loaded spring force	0.20/0.30 N
Spring force at working travel	0.80/1.50 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, rhodium-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	0.87 mm
With pressed-in ring	0.95 mm
HGW 2372	0.87 mm
With pressed-in ring	0.95 mm

Tip style · Diameter · Plating




B	E	G3	K
0.50C Rh	0.80C Rh	0.28C Rh	0.90C Rh

1007.60

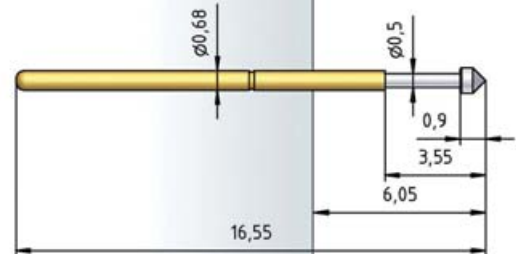

H 1007.60 V700

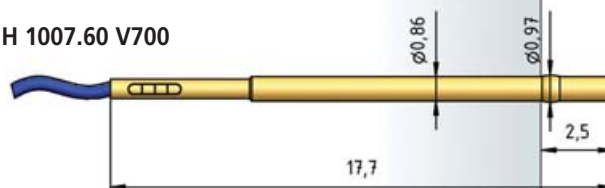

How to order:

1007.60 - K - 0.8 N - Rh - 0.9 C

1 2 3 4 5 6 7

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1007.70

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.27 mm/50 mil
Full travel	1.27 mm
Pre-loaded spring force	0.29/0.40/0.50 N
Spring force at working travel	0.80/0.90/1.40 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 25 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Bronze/Stainless steel/ Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	0.87 mm
With pressed-in ring	0.95 mm
HGW 2372	0.87 mm
With pressed-in ring	0.95 mm

Tip style · Diameter · Plating




B	C	D
0.53C Au	0.89C Au	0.89C Au

1007.70

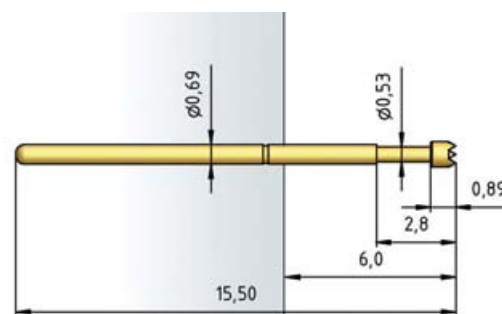

H 1007.70 V915

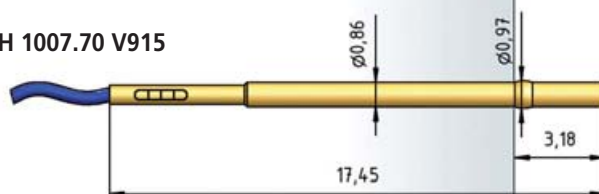

How to order:

1007.70 - C - 0.8 N - Au - 0.89 C

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1010

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.91 mm/75 mil
Full travel	3.00 mm
Working travel	2.40 mm
Pre-loaded spring force	0.20 N
Spring force at working travel	0.80 N

Electrical Data

Max. current rating	2.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Stainless steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.30 mm
With pressed-in ring	1.46 mm
HGW 2372	1.32 mm
With pressed-in ring	1.47 mm


Tip style · Diameter · Plating

				
A	B	B1	C	D
1.50 Au	0.45 Au/Ni	0.70 Au	1.50 Au	0.50 Au


				
D	D2	D2	DF	F
0.65 Au 1.00 Au	0.40 Au	0.60 Au	1.00 Au	1.00 Au 1.50 Ni

	
G	H
1.50 Rh	1.50 Ni

1010

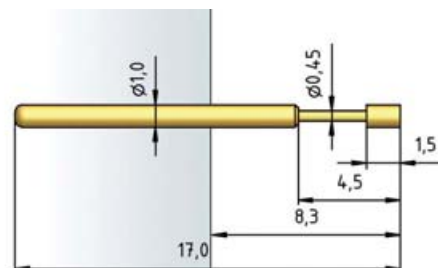

H 1010 C

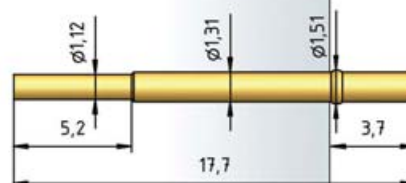

H 1010 L



H 1010 W



How to order:

1010 - A - 0.8 N - Au - 1.5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1010.50

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.91 mm/75 mil
Full travel	2.54 mm
Pre-loaded spring force	0.18/0.32 N
Spring force at working travel	0.80/1.25 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Stainless steel, unplated
Plunger	CuBe, rhodium-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	1.30 mm
With pressed-in ring	1.40 mm
HGW 2372	1.31 mm
With pressed-in ring	1.41 mm

Tip style · Diameter · Plating




A	B	G3	K
0.72C Rh	0.72C Rh	0.72C Rh	1.30C Rh 1.50C Rh

1010.50

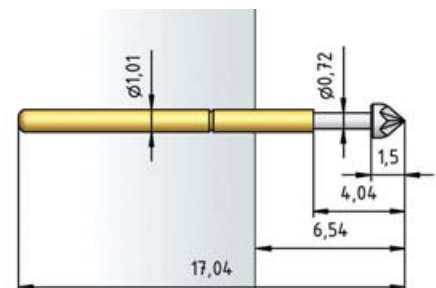

H 1010.50 W7

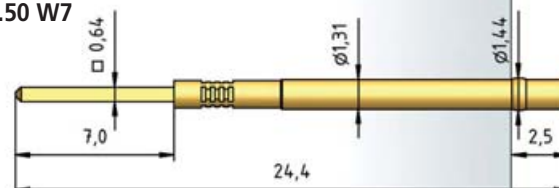

H 1010.50 W9



H 1010.50 WT9



How to order:

1010.50 - K - 1.25 N - Rh - 1.5 C
1 2 3 4 5 6 7

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1011

- Universal applications
- Compact design
- Short travel
- Contacting of assembled PCBs

Tip style · Diameter · Plating


A

0.72C Rh

Mechanical Data

Center	1.91 mm/75 mil
Full travel	4.20 mm
Pre-loaded spring force	0.30/0.30 N
Spring force at working travel	1.10/1.50 N

Electrical Data




Max. current rating	3.0 A
Typical continuity resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Stainless steel, coated
Plunger	CuBe, rhodium-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.30 mm
With pressed-in ring	1.40 mm
HGW 2372	1.31 mm
With pressed-in ring	1.41 mm

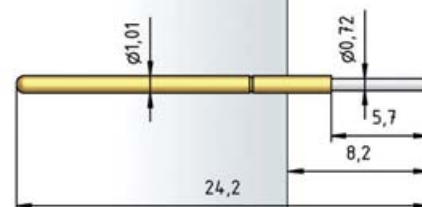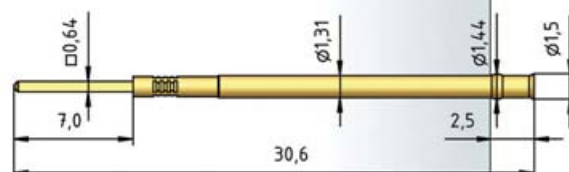1011

H 1011 WT7

H 1011 WT9


How to order:

1011 - A - 1.1 N - Rh - 0.72 C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1015

- Universal applications
- Contacting of assembled PCBs
- Wide variety of types

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.40 mm
Working travel	3.50 mm
Pre-loaded spring force	0.25/0.40/0.40/ 0.30/0.70/0.60 N
Spring force at working travel	0.70/1.00/1.50/ 1.70/2.50/3.00 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.67 mm
With pressed-in ring	1.75 mm
HGW 2372	1.69 mm
With pressed-in ring	1.76 mm




How to order:

1015 - A - 1.5 N - Au - 1.8

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Tip style · Diameter · Plating


				
A	B	BS	C	C15
1.80 Au/Ni	0.75 Au/Rh/Ni	0.38 Au/Ni	1.00 Au 1.30 Au 1.80 Au/Ni	1.80 Au

				
C15	C2S	D	D	E
1.37 Au/HTK	1.80 Au/HTK	0.50 Ni 0.65 Au/Ni 0.75 Au/Rh	1.25 Au/Ni	1.80 Au/Ni


				
F	F	G	H	K
0.75 Rh	1.50C Au 1.80 Rh	1.30 Rh 1.80 Au/Ni	1.30 Rh 1.80 Au 3.00 Rh	1.80 Au/Ni


Q
0.75 Au


1015

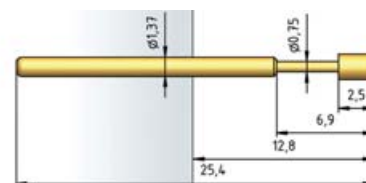

1015-C15

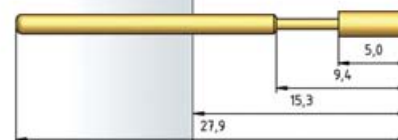

H 1015 C



H 1015 L



H 1015 W



H 1015 C-K



H 1015 L-K



H 1015 W-K



H 1015 WR



Series 1015.50

- Universal applications
- Contacting of assembled PCBs

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.20 mm
Pre-loaded spring force	0.35/0.50/0.70 N
Spring force at working travel	1.00/1.50/2.50 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Stainless steel, unplated
Plunger	CuBe, rhodium-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.66 mm
With pressed-in ring	1.81 mm
HGW 2372	1.67 mm
With pressed-in ring	1.82 mm


Tip style · Diameter · Plating




A

1.35C Rh


1015.50

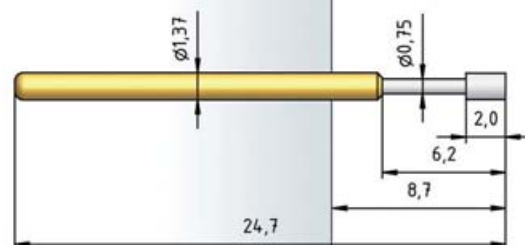

H 1015.50 WT7

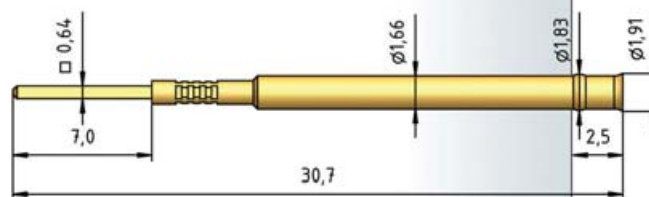

H 1015.50 WT9

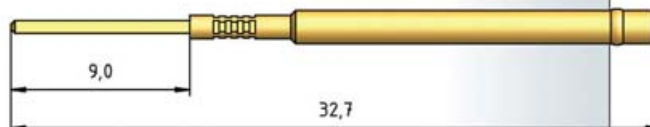

How to order:

1015.50 - A - 1.5 N - Rh - 1.35C

1 2 3 4 5 6 7

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1016

- Universal applications
- Contacting of assembled PCBs

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.40 mm
Working travel	3.50 mm
Pre-loaded spring force	0.40/0.70/0.90 N
Spring force at working travel	1.50/2.25/3.00 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.67 mm
With pressed-in ring	1.75 mm
HGW 2372	1.69 mm
With pressed-in ring	1.76 mm

Tip style · Diameter · Plating

				
A	B	C	D	E
1.80 Au	1.00 Au	1.80 Ni	1.00 Au	1.80 Au/Rh
				
F	H	K	Q	
1.80 Au	1.80 Rh	1.80 Rh	1.80 Ni/Rh	

1016

H 1015 C

H 1015 L

H 1015 W

H 1015 C-K

H 1015 L-K

H 1015 W-K

H 1015 WR

How to order:

1016 - C - 1.5 N - Au - 1.8

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1018

- Universal applications
- Contacting of assembled PCBs

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.40 mm
Working travel	3.50 mm
Pre-loaded spring force	0.40/0.70/0.90 N
Spring force at working travel	1.50/2.25/3.00 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	1.67 mm
With pressed-in ring	1.75 mm
HGW 2372	1.69 mm
With pressed-in ring	1.76 mm

Tip style · Diameter · Plating




K	K6	TA
1.20 Ni	1.90 Ni	1.20 Rh
1.35 Ni		1.90 Rh
1.90 Ni		
2.50 Rh		
3.50 Ni		


1018

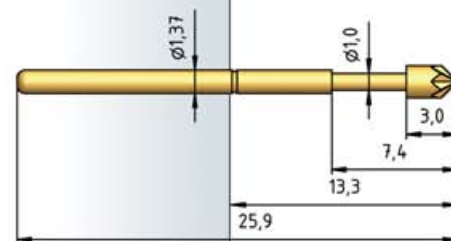

1018-K6

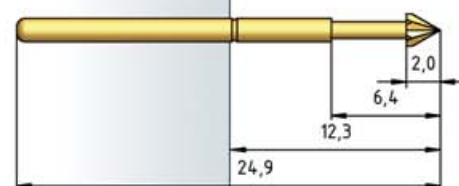

H 1015 C

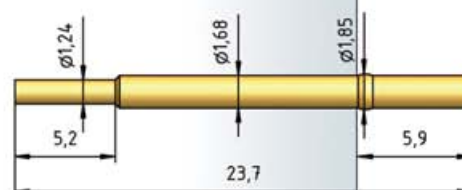

H 1015 L



H 1015 W



H 1015 C-K



H 1015 L-K



H 1015 W-K



H 1015 WR



How to order:

1018 - K - 1.5 N - Ni - 1.9

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1018.06

- Universal applications
- Contacting of assembled PCBs

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.10 mm
Working travel	2.70 mm
Pre-loaded spring force	0.40/0.60 N
Spring force at working travel	1.00/1.80 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	1.67 mm
With pressed-in ring	1.75 mm
HGW 2372	1.69 mm
With pressed-in ring	1.76 mm

Tip style · Diameter · Plating




G6	H6
1.54 Au	1.90C Au

1018.06

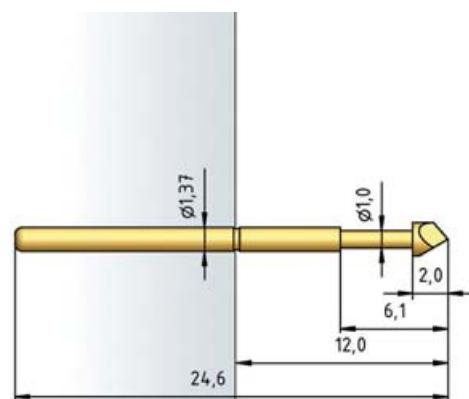

H 1015 C

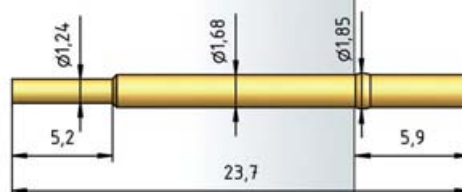

H 1015 L



H 1015 W



H 1015 C-K



H 1015 L-K



H 1015 W-K



H 1015 WR



How to order:

1018.06 - H - 1.0 N - Au - 1.9C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series	Center
1008/E	50 mil/1.27 mm
1008/E.50	50 mil/1.27 mm
1012/E	75 mil/1.91 mm
1013/Z	75 mil/1.91 mm
1025/E	100 mil/2.54 mm
1034/E	100 mil/2.54 mm
1034	100 mil/2.54 mm
1036	100 mil/2.54 mm
2021• 1021	100 mil/2.54 mm
2024• 1024	100 mil/2.54 mm
2028• 1028	100 mil/2.54 mm
2029	100 mil/2.54 mm

ICT test probes (E-series)

The range of ICT test probes comprises all standard series of products which have established themselves on the market as international standards. These are test probes for centers from 50 mil to 100 mil with a large selection of different tip styles and contact pressures for almost all test requirements. In addition, test probe units with a longer test probe travel are available for 2-level adaptations. Receptacles with a press ring can be supplied for this series. This press ring can be used as a stop to achieve a constant extension height in the adapter, but it also allows variable heights if the press ring is pressed into a defined setting in the take-up drill hole. The ICT receptacles are available for various types of connections. In addition to these standards, PTR also offers metric types for the ICT/FT. In this case, the receptacles are normally pressed into the take-up drill hole as far as the stop. Here, too, test probe barrels with different collar heights allow variable extension heights in the adapter.



Series 1008/E

- International standard for 50 MIL applications
- Contacting of assembled PCBs

Mechanical Data

Center	1.27 mm/50 mil
Full travel	6.40 mm
Working travel	4.30 mm
Pre-loaded spring force	0.30/0.40/0.50/0.60 N
Spring force at working travel	1.00/1.50/2.00/2.80 N

Electrical Data

Max. current rating	2.0 - 3.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	0.95...0.96 mm
With pressed-in ring	1.02 mm
HGW 2372	0.96...0.97 mm
With pressed-in ring	1.03 mm


Tip style · Diameter · Plating

				
A	A	B	BST2	C
0.50C Au	0.90 Au	0.50 Au	0.50 Au	0.90C Au
				
D	F	H	H1	LG
0.50C Au	0.60C Au	0.50 Au 0.90C Au	0.50 Au	0.40 Au
				
Q	V	V1	V4	VL2
0.50 Au	0.50 Au	0.50 Au	0.50 Au	0.50 Au


1008/E

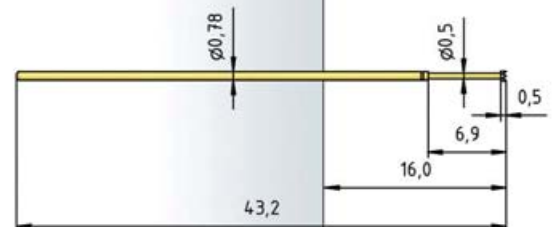

1008/E-VL2

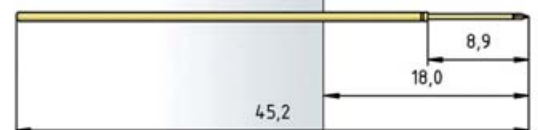


H 1008/E

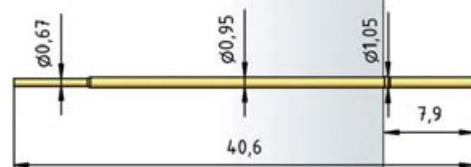


H 1008/E-L



H 1008/E-ST



ST 1008/E



How to order:

1008/E - C - 1.5 N - Au - 0.9 C

1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1008/E.50

- International standard for 50 MIL applications
- Contacting of assembled PCBs
- Spring travel 10 mm

Tip style · Diameter · Plating



H

0.50 Au

Mechanical Data

Center	1.27 mm/50 mil
Full travel	10.00 mm
Working travel	8.00 mm
Pre-loaded spring force	0.25/0.30 N
Spring force at working travel	1.00/1.50 N

Electrical Data

Max. current rating	2.0 - 3.0 A
Typical continuity resistance	<= 20 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	0.95...0.96 mm
With pressed-in ring	1.02 mm
HGW 2372	0.96...0.97 mm
With pressed-in ring	1.03 mm

1008/E.50

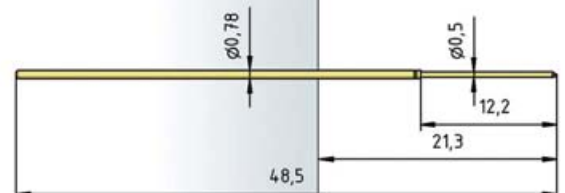

H 1008/E

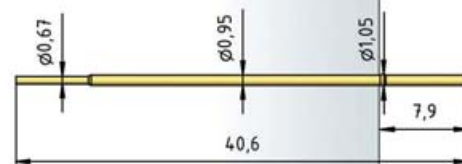


H 1008/E-L



H 1008/E-ST



ST 1008/E



How to order:

1008/E.50 - H - 1.5 N - Au - 0.5

1 2 3 4 5 6

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter

Series 1012/E

- International standard for 75 MIL applications
- Contacting of assembled PCBs
- Large selection of head styles

Mechanical Data

Center	1.91 mm/75 mil
Full travel	6.40 mm
Working travel	4.30 mm
Pre-loaded spring force	0.20/0.30/0.40/ 0.50/0.70 N
Spring force at working travel	0.60/1.00/1.50/ 2.00/2.80 N



Electrical Data

Max. current rating	3.0 - 4.0 A
Typical continuity resistance	<= 20 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Bronze, gold-plated


Tip style · Diameter · Plating

				
A	B	BD	BST1	BST2
1.20C Au	0.64 Au	0.61C Au	0.64 Au	0.64 Au
				
C	CS1	D	D	D3
1.00 Au 1.20 Au	1.30C Au/HTK	0.50C Au	0.64C Au	0.50C Au
				
F	G	H	H	H1
0.90C Au	1.15 Au	0.64 Au	1.00 Au 1.20 Au	0.64 Au
				
K	M1	M6	N	Q
1.20 Au	1.20 Au	1.30 Au	0.50 Au	0.50 Au
				
Q	Q	Q8	V	V1
0.64 Au	0.80 Au 1.00 Au 1.15 Au	1.20 Au	0.64 Au	0.64 Au
				
V1	V5	VL2		
0.80 Au	0.64 Au	0.64 Au		


1012/E

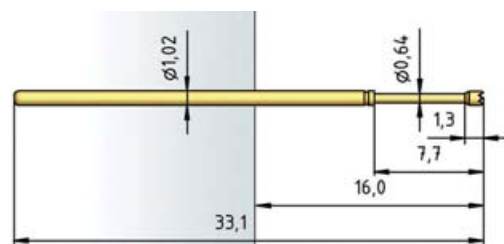


1012/E-VL2

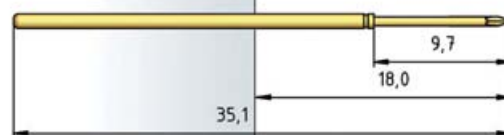

1012/E2

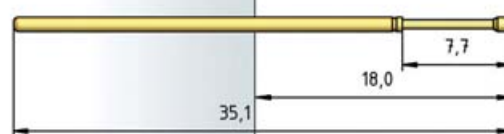

BGK 1012

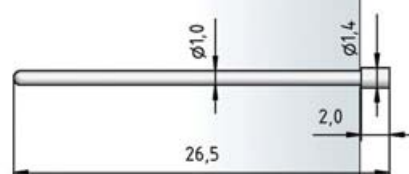

Receptacles see page 45

How to order:

1012/E - C - 1.5 N - Au - 1.0C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1013/Z

- International standard for 75 MIL applications
- Contacting of assembled PCBs
- Spring travel 12 mm

Mechanical Data

Center	1.91 mm/75 mil
Full travel	12.00 mm
Working travel	9.60 mm
Pre-loaded spring force	0.40/0.35 N
Spring force at working travel	1.20/1.60 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Tip style · Diameter · Plating

				
C	H	Q	Q	V
1.15 Au	1.15 Au	0.64 Au	1.15 Au	0.64 Au

1013/Z

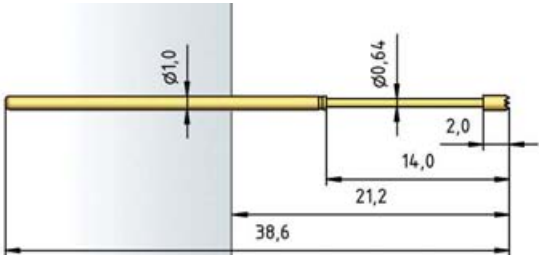

Receptacles see page 45

How to order:

1013/Z - C - 1.6 N - Au - 1.15

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Receptacles 1012

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.30 mm
With pressed-in ring	1.36 mm
HGW 2372	1.32 mm
With pressed-in ring	1.37 mm

H 1012 C

H 1012 L

H 1012 W

H 1012/10 C

H 1012/10 L

H 1012/10 W

H 1012/2 C

H 1012/2 L

H 1012/2 W


H 1012 C-K

H 1012 L-K

H 1012 W-K

H 1012 W18

H 1012 WR

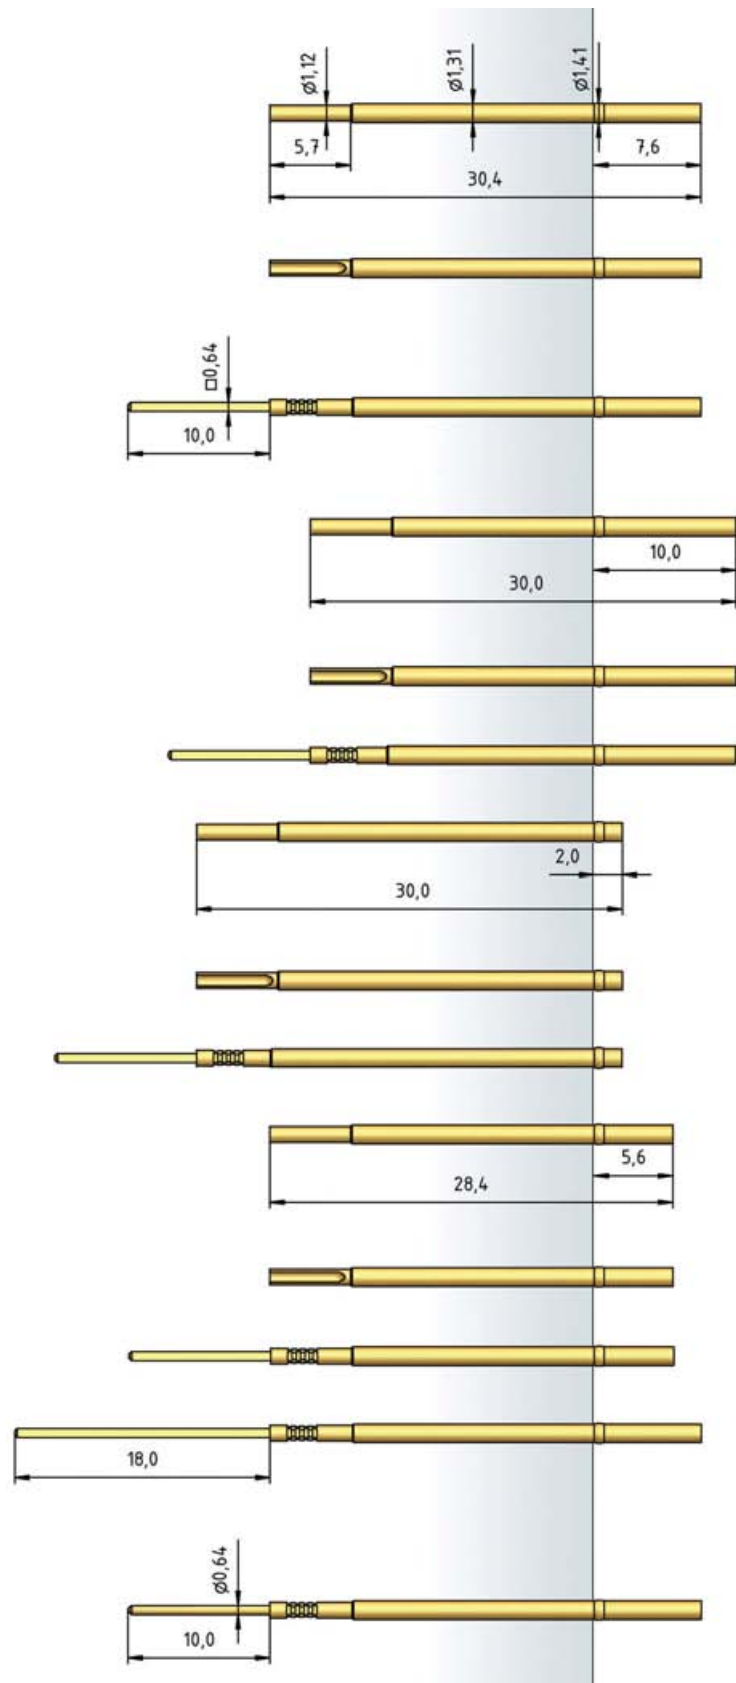

Series 1025/E

- International standard for 100 MIL applications
- Contacting of assembled PCBs
- Large selection of head styles

Mechanical Data

Center	2.54 mm/100 mil
Full travel	6.40 mm
Working travel	4.30 mm
Pre-loaded spring force	0.20/0.25/0.40/0.60/0.50/0.80/1.40 N
Spring force at working travel	0.60/1.00/1.50/2.00/2.25/3.00/4.00 N


Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 20 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Bronze, gold-plated


1025/E

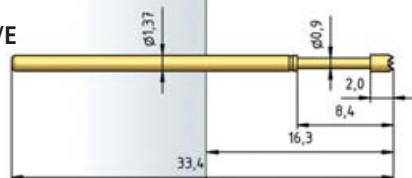


1025/E-...L2



1025/E2



1025/E5



Receptacles see page 50

Tip style · Diameter · Plating

A	A6	B	BD	BST1
1.50C Au 2.00C Au	1.80C Au	0.90 Au	0.90 Au	0.62 Au/Ni

BST2	BST3	C	C1	CS1
0.90 Au	1.60C Au	1.30 Au 1.50C Au 2.00C Au 2.50C Au 3.00C Au	2.30C Au 3.10C Au	2.25C Au/HTK

CS3	CS8	D1	D	D
2.40C Au/HTK	2.80C Au/HTK	0.50 Au 0.64C Au	0.90C Au	1.30 Au 1.50 Au

E	F	F	G	H
1.50 Au	0.90 Au	1.50 Au	1.06 Au 1.30 Au 1.50 Au	0.90 Au

H	H1	HL2	K	M
1.50 Au 1.70 Au 2.50 Au	0.90 Au	0.90C Au	1.70 Au	1.30 Au

M1	M6	N	Q	Q
1.30 Au 1.40C Au 1.50 Au	1.30 Au 1.50 Au	0.50 Au	0.50 Au 0.80 Au	1.06 Au 1.30 Au 1.50 Au

Q5	Q8	QL2	V	V
1.06 Au	1.50 Au	1.50 Au	0.90 Au/Ni	1.30 Au

V1	V3	VL2	V5
0.90 Au	0.90 Au	0.90 Au	0.90 Au

How to order:

1025/E - C - 1.5 N - Au - 1.5 C

1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1034/E

- International standard for 100 MIL applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 10 mm

Mechanical Data

Center	2.54 mm/100 mil
Full travel	10.00 mm
Working travel	8.00 mm
Pre-loaded spring force	0.40/0.40/0.50 N
Spring force at working travel	1.50/2.25/3.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<=30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe, gold-plated
Receptacle	Bronze, gold-plated


Tip style · Diameter · Plating

				
A	B	BSTL2	C	G
1.30 Au	0.90 Au	0.50 Au	1.30 Au 1.50 Au	1.30 Au


				
H	M1	Q	Q	V
1.50 Au 2.50 Au	1.30 Au	0.50 Au	1.30 Au 1.50 Au	0.90 Au


V1
0.90 Au

1034/E

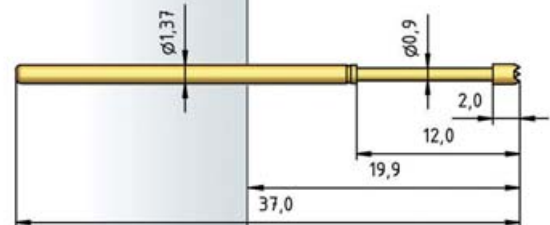

1034/E-...L2

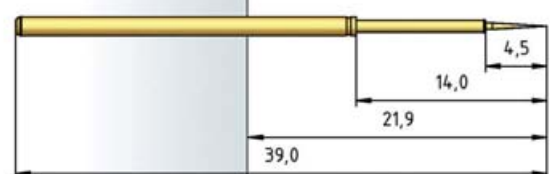

Receptacles see page 50

How to order:

1034/E - C - 1.5 N - Au - 1.5

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1034

- International standard for 100 MIL applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 10 mm

Mechanical Data

Center	2.54 mm/100 mil
Full travel	10.00 mm
Working travel	8.00 mm
Pre-loaded spring force	0.60/0.70 N
Spring force at working travel	1.50/2.25 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 25 mOhm


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Tip style · Diameter · Plating

				
B	BST	C	G	H
0.75 Au/Ni	0.62 Ni	1.50 Au	1.50 Au	1.50 Au
				
M1	Q	Q	V	
1.40 Au	1.00 Au/Rh	1.30 Au 1.50 Au	0.75 Ni	

1034

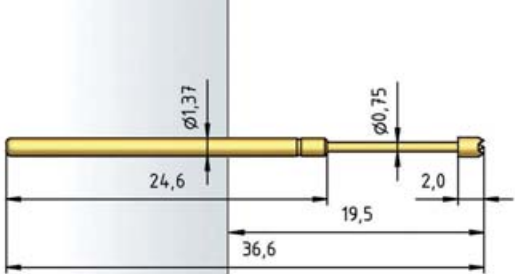

Receptacles see page 50

How to order:

1034 - C - 2.25 N - Au - 1.5
1 2 3 4 5
1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1036

- International standard for 100 MIL applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 12 mm

Mechanical Data

Center	2.54 mm/100 mil
Full travel	12.00 mm
Working travel	10.00 mm
Pre-loaded spring force	0.30/0.40 N
Spring force at working travel	1.50/2.25 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 25 mOhm

Materials


Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Tip style · Diameter · Plating

				
B	BST	C	G	H
0.75 Au/Ni	0.62 Ni	1.50 Au	1.50 Au	1.50 Au

			
M1	Q	Q	V
1.40 Au	1.00 Au/Rh	1.30 Au 1.50 Au	0.75 Ni

1036

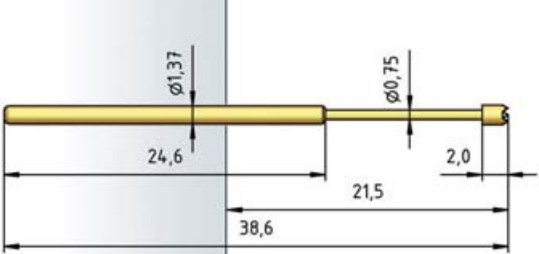

Receptacles see page 50

How to order:

1036 - C - 2.25 N - Au - 1.5
1 2 3 4 5
1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Receptacles 1025

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.65 mm
With pressed-in ring	1.75 mm
HGW 2372	1.67 mm
With pressed-in ring	1.76 mm

H 1025 C

H 1025 L

H 1025 W

H 1025/12

H 1025/12 L

H 1025/12 W

H 1025/2

H 1025/2 L

H 1025/2 W


H 1025 C-K

H 1025 L-K

H 1025 W-K

H 1025 W18

H 1025 WR

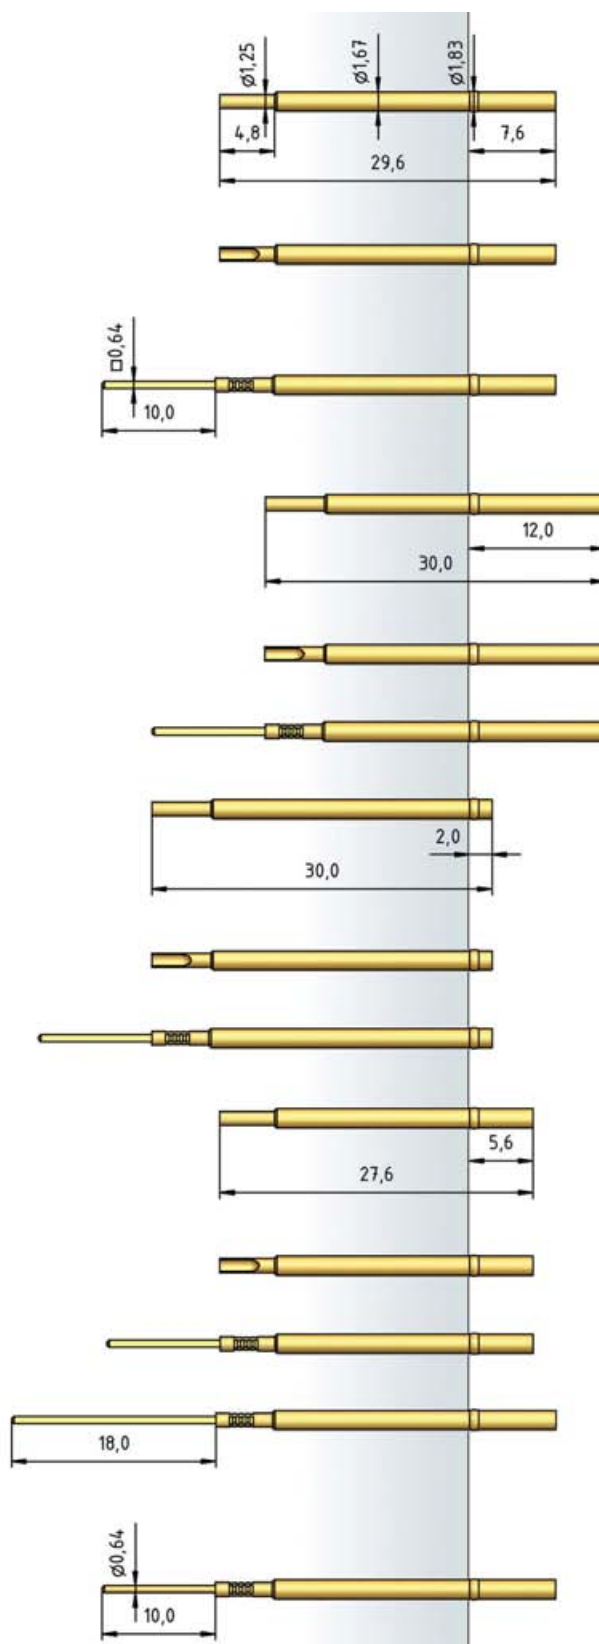

Series 2021 • 1021

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles
- Variable extension heights from various collar dimensions

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Pre-loaded spring force	0.30/0.40/0.50/ 0.70/1.00/1.00 N
Spring force at working travel	0.70/1.00/1.50/ 2.25/3.00/5.00 N

2021/5: 0.70 N/1.00 N not available
1021/X: 0.70 N not available

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 25 mOhm

Materials

Barrel	Bronze/ Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/Plastic
Receptacle	Bronze, gold-plated

Recommended diameter of drill

H2021

HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm

Collar height X/mm	Extension height Y/mm	Overall length Z/mm
2,0	10,5	32,3
5,0	13,5	35,3
7,0	15,5	37,3
8,0	16,5	38,3
9,0	17,5	39,3
10,0	18,5	40,3

How to order:


2021/5 - F - 1.5 N - Au - 2.0
1 2 3 4 5 6

1. Series 2. Collar height 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter

Tip style · Diameter · Plating



A	B	BST	C	C1S
2.00 Au/Ni/Rh	0.65 Ni 0.80 Au/Ni/Rh 1.00 Au/Ni	0.80 Au	1.30 Au/Ni/Rh 1.50 Au 1.80 Au/Ni/Rh 2.00 Au/Ni 2.30 Rh 2.50 Ni 3.00 Rh	2.00 Au/HTK



C5S	D	D	D1	F
2.50 Au/HTK	0.65 Au/Ni 0.80 Au 1.00 Au	1.30 Au/Ni 1.40 Au 1.80 Ni 2.00 Au	0.65 Au/Ni	0.80 Au 1.00 Au/Ni




F	F1	G	H	K
1.50 Au 1.80 Au 2.00 Au/Ni	0.65 Ni	1.30 Ni 1.80 Au/Rh 2.00 Au	1.80 Rh 2.00 Rh	1.15 Ni 1.75 Rh 2.00 Rh




M	Q
1.80 Rh	1.00 Ni 1.30 Au/Ni

2021

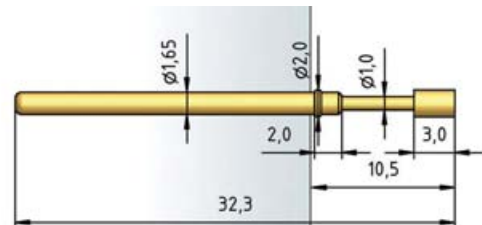


2021/5

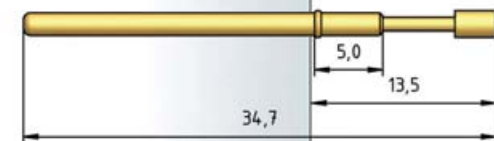

1021/5R



1021/X

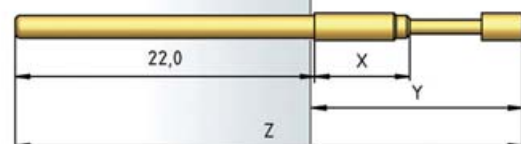

Receptacles see page 50

Series 2024 • 1024

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles
- Variable extension heights from various collar dimensions

Mechanical Data	
Center	2.54 mm/100 mil
Full travel	10.00 mm
Working travel	8.00 mm
Pre-loaded spring force	0.40/0.50/1.00 N
Spring force at working travel	1.50/2.50/3.00 N

Electrical Data	
Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials	
Barrel	Bronze/ Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Recommended diameter of drill	
HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm

Series	Collar height X/mm	Extension height Y/mm	Overall length Z/mm
1024	3,0	16,2	38,0
1024	5,0	18,2	40,0
1024	7,0	20,2	42,0
2024	8,0	21,2	43,0
1024	10,0	23,2	45,0

How to order:

2024 - G - 1.5 N - Ni - 1.3

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter


Tip style · Diameter · Plating

A	B	BST	C	D
1.80 Au 2.00 Au	1.00 Ni	0.80 Au	1.30 Rh 2.00 Ni	1.00 Ni

D	F	G	G	H
1.30 Ni	2.00 Au	1.00 Ni	1.30 Ni 2.00 Ni	1.30 Rh

K	M	M1	Q	Q8
2.00 Ni	1.50 Au	2.00 Rh	1.30 Ni	1.80 Au

V	V
1.00 Ni	1.30 Au

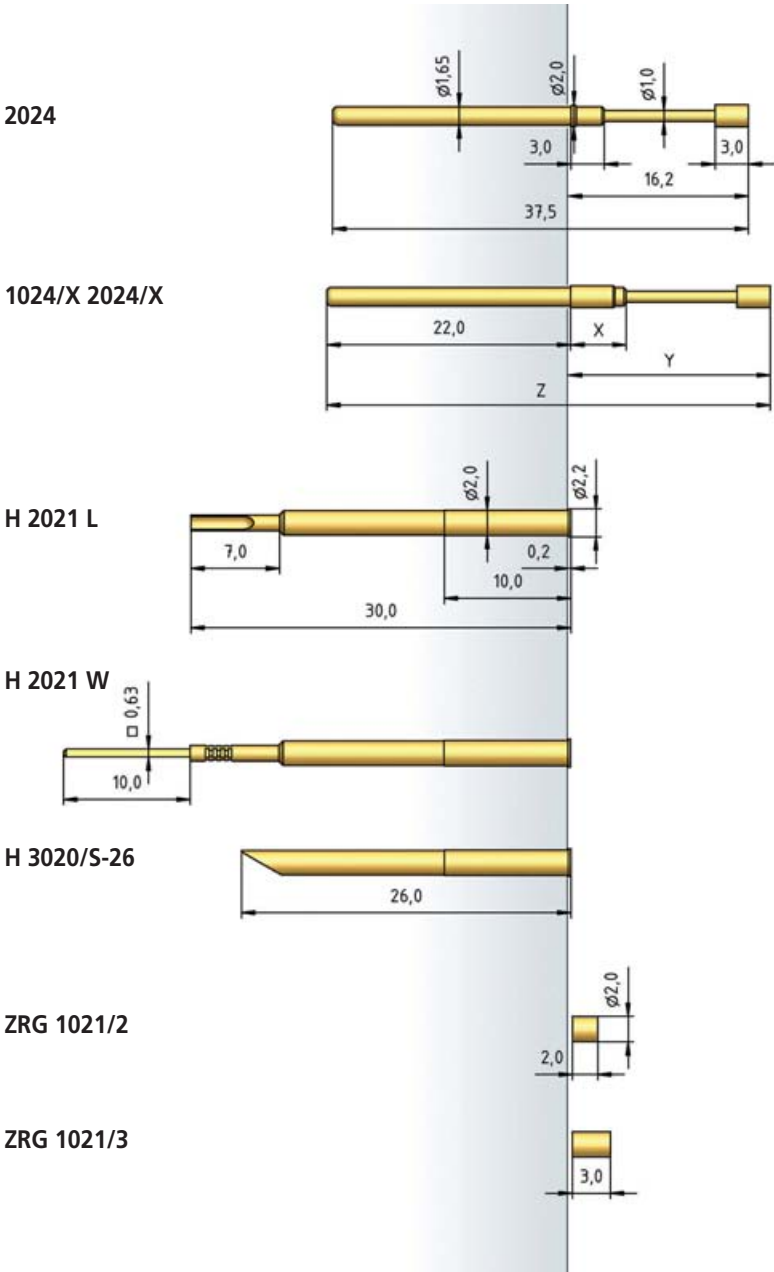

Series 2028 • 1028

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Pre-loaded spring force	0.30/0.40/0.50/ 0.75/1.00/1.00 N
Spring force at working travel	0.70/1.00/1.50/ 2.25/3.00/5.00 N

2028/5: 0.70 N /1.00 N not available
1028/5R: 0.70 N not available

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 25 mOhm

Materials


Barrel	Bronze/ Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/Plastic
Receptacle	Bronze, gold-plated

Recommended diameter of drill


H2021

HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm

Tip style · Diameter · Plating

				
A	B	BST	C	CSM
1.50 Au/1.80 Ni	1.30 Rh	0.80 Au	1.40 Au 1.80 Rh 2.50 Rh 3.50 Rh	1.30 Au
				
D	D1	EB	F	G
1.40 Au	0.65 Ni 0.80 Ni	1.80 Au	1.30 Au	1.30 Ni 1.50 Rh
				
H	H	K	M	Q
1.30 Au	1.40 Au 1.80 Au	1.30 Au 1.75 Ni	2.00 Rh	1.30 Au
				
Q	Q5	Q8	V	
1.80 Au 2.00 Au	1.30 Ni	2.30 Ni	1.30 Ni	

2028




2028/5



1028/5R



H 2021 L



H 2021 W



H 3020/S-26



ZRG 1021/2



ZRG 1021/3



How to order:

2028 - A - 1.5 N - Au - 1.5

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 2029

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles

Mechanical Data

Center	2.54 mm/100 mil
Full travel	8.00 mm
Working travel	6.40 mm
Pre-loaded spring force	0.35/0.70/0.80 N
Spring force at working travel	1.50/2.25/3.00 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, silver-plated
Plunger	Steel
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm


Tip style · Diameter · Plating

				
A	B	BST	C	D
1.50 Ni	1.30 Rh	0.80 Au	1.30 Ni/Rh 1.50 Au/Rh 1.60 Rh	1.50 Au/Ni
				
EB	G	H	K	M1
1.80 Au	1.30 Au/Ni/Rh 1.50 Ni 1.60 Ni/Rh	1.30 Au 1.50 Ni 1.80 Au	1.80 Au	1.50 Au
				
Q	Q5	V		
1.50 Ni	1.30 Au/Ni	1.30 Ni		


2029/5

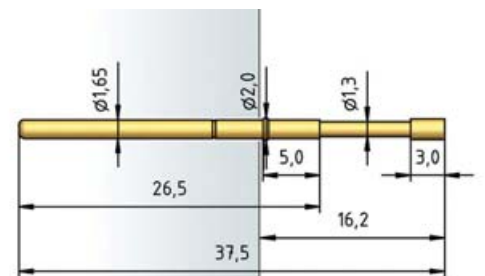

2029/8

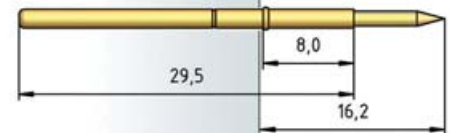


H 2021 L

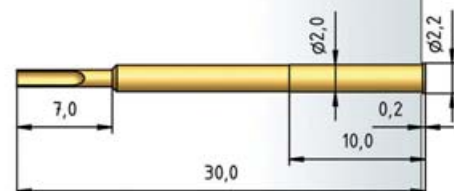


H 2021 W



H 3020/S-26



ZRG 1021/2



ZRG 1021/3



How to order:

2029/5 - C - 1.5 N - Rh - 1.5

1. Series 2. Collar height 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter

Series	Center
1008/D	50 mil/1.27 mm
1012/D	75 mil/1.91 mm
1025/D	100 mil/2.54 mm

Rotating test probes

Rotating test probes offer an alternative for the testing of assembled components under unclean conditions. When the plunger is pressed downwards, its special spiral design causes a rotation, limited to approx. 90°. This principle allows perfect contacting even when the contact surfaces are dirty or oxidised. In combination with the rotating motion, the tip styles – which are normally aggressive – also allow the use of probes with lower contact pressures.



Series 1008/D

- Use in cases of bad soiling, oxydation or flux residues
- Penetration of these platings by rotating movement

Mechanical Data

Center	1.27 mm/50 mil
Full travel	6.40 mm
Working travel	4.30 mm
Pre-loaded spring force	0.40 N
Spring force at working travel	1.50 N

Electrical Data

Max. current rating	2.0 - 3.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated




Recommended diameter of drill


HP 2361.1 (Trolitax)	0.95...0.96 mm
With pressed-in ring	1.02 mm
HGW 2372	0.96...0.97 mm
With pressed-in ring	1.03 mm

Tip style · Diameter · Plating


HD

0.90 Au

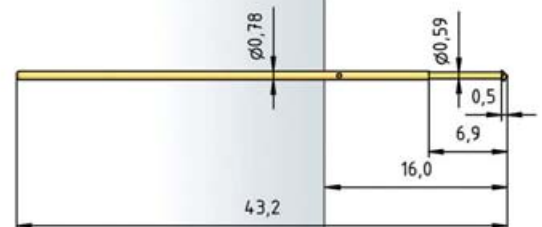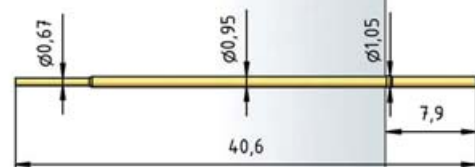1008/D

H 1008/E

H 1008/E-L

H 1008/E-ST

ST 1008/E


How to order:

1008/D - HD - 1.5 N - Au - 0.9

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1012/D

- Use in cases of bad soiling, oxydation or flux residues
- Penetration of these platings by rotating movement

Mechanical Data

Center	1.91 mm/75 mil
Full travel	6.40 mm
Working travel	4.30 mm
Pre-loaded spring force	0.50 N
Spring force at working travel	2.00 N

Electrical Data

Max. current rating	3.0 - 4.0 A
Typical continuity resistance	$\leq 20 \text{ m}\Omega$

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated


Tip style · Diameter · Plating



KD

1.20 Au

1012/D

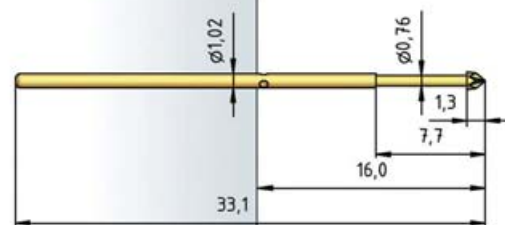

Receptacles see page 45

How to order:

1012/D - KD - 2.0 N - Au - 1.2

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1025/D

- Use in cases of bad soiling, oxydation or flux residues
- Penetration of these platings by rotating movement

Mechanical Data

Center	2.54 mm/100 mil
Full travel	6.40 mm
Working travel	4.30 mm
Pre-loaded spring force	0.60 N
Spring force at working travel	2.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated


Tip style · Diameter · Plating



KD

1.50 Au

1025/D

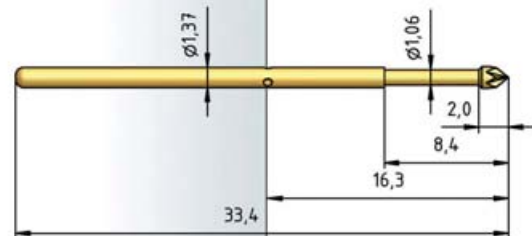

Receptacles see page 50

How to order:

1025/D - KD - 2.0 N - Au - 1.5

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series	Center
5248/G	100 mil/2.54 mm
5257/G	100 mil/2.54 mm

Flying probes

The flying probe testers are designed as a thread variant and are suitable for use in Acculogic (Scorpion) and Digitaltest test systems. A special locking system ensures very high test point accuracy.



Series 5248/G • 5248/G-V

- Use in Acculogic flying probe testers (Scorpion) and digital test
- High test point accuracy
- Threaded type

Mechanical Data • 5248/G

Center	2.54 mm/100 mil
Full travel	8.00 mm
Working travel	6.40 mm
Pre-loaded spring force	0.50 N
Spring force at working travel	1.75 N

Mechanical Data • 5248/G-V

Center	2.54 mm/100 mil
Full travel	6.50 mm
Working travel	5.00 mm
Pre-loaded spring force	0.50 N
Spring force at working travel	1.50 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.00 mm
HW 2372	2.03 mm

Tip style · Diameter · Plating




A	BST1	V
1.30 Au	1.00 Au	1.30 Au


5248/G

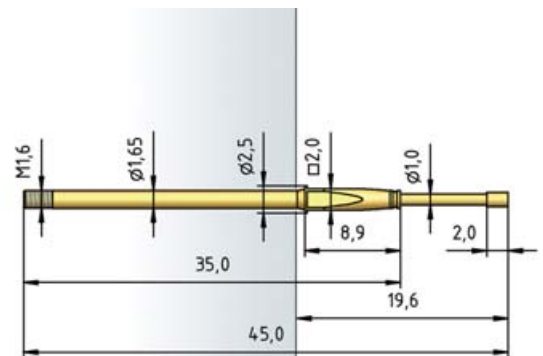

5248/G-V

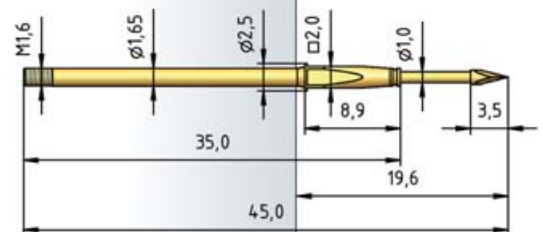


H 1021/GR-C

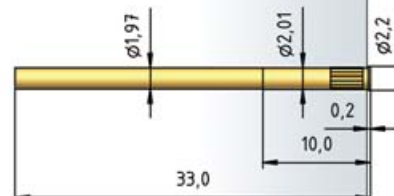

H 1021/GR-L



H 1021/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

5248/G - A - 1.75 N - Au - 1.3

1 2 3 4 5 6

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

Series 5257/G

- Use in Acculogic flying probe testers (Scorpion) and digital test
- High test point accuracy
- Threaded type

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Pre-loaded spring force	0.60 N
Spring force at working travel	1.75 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.03 mm

Tip style · Diameter · Plating




A	BST1	V
1.40 Au	1.00 Au	1.30 Au

5257/G

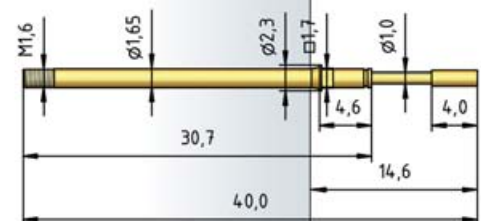


H 1021/GR-C

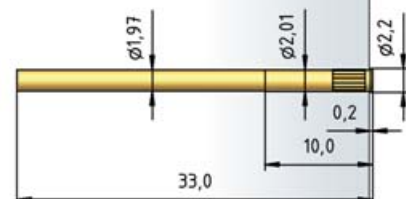

H 1021/GR-L



H 1021/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

5257/G - A - 1.75 N - Au - 1.4

1 2 3 4 5 6

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

Series	Center
1030	3.00 mm
1040	4.00 mm
1041 / 1041W	5.00 mm
1042	4.50 mm
1050	4.00 mm
1060	4.00 mm
1051 / 1061	4.00 mm
1054	4.50 mm
1055	4.50 mm

Test probes for centers >100 mil

The range of universal test probes for centers >100 mil comprises types for centers up to a maximum of 4.75 mm. They can be used for ICT/FTs (in-circuit test or function test) of components, burn-in / run-in tests, and for applications up to the testing of connectors on cable harnesses for the automotive industry. The use of suitable probes allows temperature ranges from -50°C to 150°C to be achieved.



Series 1030

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	3.18 mm/125 mil
Full travel	6.30 mm
Working travel	5.00 mm
Pre-loaded spring force	0.40/0.60/0.70 N
Spring force at working travel	1.50/2.25/3.00 N

Electrical Data

Max. current rating	4.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Bronze, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.32 mm
With pressed-in ring	2.54 mm
HGW 2372	2.34 mm
With pressed-in ring	2.56 mm

Tip style · Diameter · Plating


				
A	B	C	D	E
1.30 Rh/2.50 Au	1.30 Au	2.50 Au/Ni	1.30 Au 1.60 Au/Ni 2.50 Au	2.50 Au

		
F	G	H
2.50 Au/Ni 4.00 Au	2.50 Rh	2.50 Au

1030

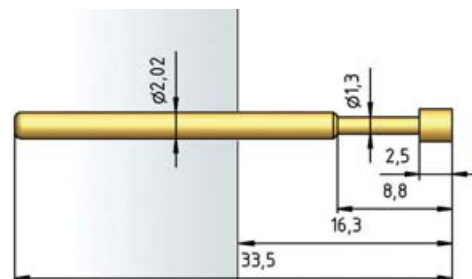

H 1030 C

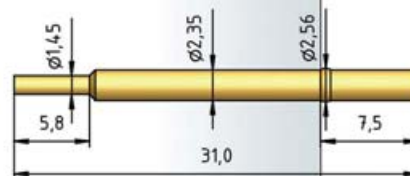

H 1030 L



How to order:

1030 - A - 1.5 N - Au - 2.5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1040

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.50 mm
Working travel	4.40 mm
Pre-loaded spring force	0.50/0.70/0.80/1.50 N
Spring force at working travel	1.50/2.25/3.00/5.00 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.99 mm
HGW 2372	3.00 mm

Tip style · Diameter · Plating


				
A	B	C	D	E
4.00 Au/Ni	1.50 Au/Ni	4.00 Au/Ni	2.40 Au/Ni	4.00 Au/Ni

		
F	G	H
4.00 Au/Ni	4.00 Ni	4.00 Ni

1040 with H 1040

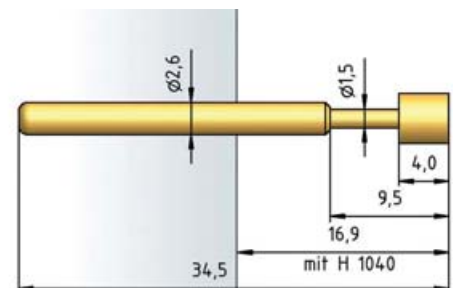


1040 with H 1045



H 1040



H 1045 L

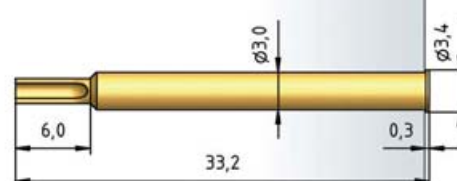

How to order:

1040 - F - 1.5 N - Au - 4.0

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1041 • 1041/W

- Stable design
- Contacting of assembled PCBs
- Universal applications
- Wire-wrap connector pin mounted directly at the test probe

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.50 mm
Working travel	4.80 mm
Pre-loaded spring force	0.25/0.75/0.60 N
Spring force at working travel	1.50/3.00/5.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.50 mm
HGW 2372	3.52 mm


Tip style · Diameter · Plating

				
A	B	BA	C	D
2.50 Ni 4.00 Au	1.80 Rh/Ni	1.80 Au/Ni	2.30 Au/Ni/Rh 3.00 Au/Ni 4.00 Au/Ni/Rh	2.30 Au



G
2.30 Rh 4.00 Au


1041

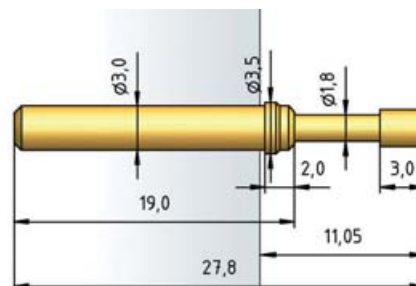


1041/W



H 1042/S

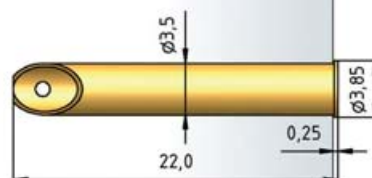

ZRG 1041/2



ZRG 1041/3



How to order:

1041/W - C - 1.5 N - Au - 4.0 MH5.5

1 2 3 4 5 6 7

1. Series 2. Wire-wrap connector 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Max. travel

Series 1042

- Stable design
- Test probe with continuous plunger
- Contacting of assembled PCBs
- Universal applications
- For use also with higher currents

Mechanical Data

Center	4.50 mm/177 mil
Full travel	7.00 mm
Working travel	5.60 mm
Pre-loaded spring force	0.40/0.50/0.60/ 1.00/3.50/3.00 N
Spring force at working travel	1.50/2.25/3.00/ 4.50/6.00/12.50 N

Electrical Data

Connector - receptacle

Max. current rating	5.0 A
Typical continuity resistance	<= 30 mOhm

Connector - plunger

Max. current rating	8.0 A
Typical continuity resistance	<=15 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	3.50 mm
HGW 2372	3.52 mm


Tip style · Diameter · Plating

				
C	C	F	G	H
1.85 Ni	4.00 Au/Ni	4.00 Ni	1.85 Ni	4.00 Rh

1042

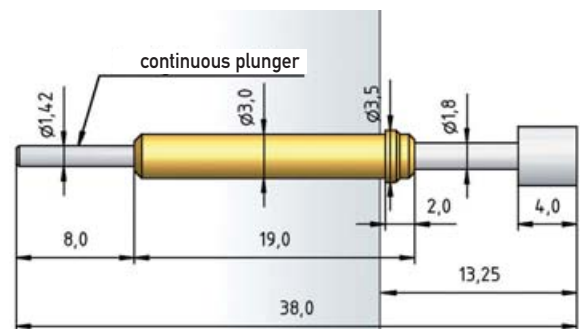

H 1042/S

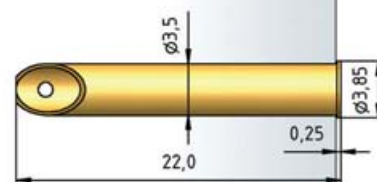

H 1042



How to order:

1042 - C - 1.5 N - Au - 4.0

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1050

- Stable design
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.50 mm
Working travel	4.40 mm
Pre-loaded spring force	0.20/0.20/0.40/ 1.00/1.00 N
Spring force at working travel	0.40/0.80/1.50/ 3.00/5.00 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	<= 30 mOhm



Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Nickel silver, unplated


Recommended diameter of drill

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm


Tip style · Diameter · Plating

				
A	B	BA	BA1	C
2.50 Ni/4.00 Au	1.80 Rh/Ni	1.80 Au/Ni	1.50 Ni	2.30 Au/Ni/Rh 2.50 Au/Ni/Rh 3.00 Au/Ni/Rh 4.00 Au/Ni/Rh
				
C6	D	D	D	D2
3.50 Au/Ni	1.00 Rh	1.80 Au	2.30 Au/Ni 2.50 Au/Ni	3.00 Au/Ni
				
D3	F	F	F3	G
0.80 Rh 1.40 Au	1.80 Au/Ni	2.30 Au/Rh 2.50 Rh 3.00 Au 4.00 Rh	1.00 Rh 1.40 Au	2.30 Rh 2.50 Rh/Ni 4.00 Au/Rh/Ni
				
H	K	KF		
2.50 Ni 2.60 Ni 3.00 Ni/Rh 4.20 Rh	1.80 Rh 3.00 Ni	2.60 Ni 4.00 Ni		


1050




1050-BA1




1050-D2



1050-C6



H 2050 L



H 2050 LST



How to order:

1050 - A - 1.5 N - Au - 4.0

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1060

- Stable design
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.50 mm
Working travel	4.40 mm
Pre-loaded spring force	0.20/0.40/0.50/ 0.80/0.70 N
Spring force at working travel	0.60/1.50/2.25/ 3.00/5.00 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	<= 30 mOhm



Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Nickel silver, unplated


Recommended diameter of drill

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm


Tip style · Diameter · Plating

				
A	B	BA	BA1	C
2.50 Ni 4.00 Au	1.80 Rh/Ni	1.80 Au/Ni	1.50 Ni	2.30 Au/Ni/Rh 2.50 Au/Ni/Rh 3.00 Au/Ni/Rh 4.00 Au/Ni/Rh
				
C6	D	D	D	D2
3.50 Au/Ni	1.00 Rh	1.80 Au	2.30 Au/Ni 2.50 Au/Ni	3.00 Au/Ni
				
D3	F	F	F3	G
0.80 Rh 1.40 Au	1.80 Au/Ni	2.30 Au/Rh 2.50 Rh 3.00 Au 4.00 Rh	1.00 Rh 1.40 Au	2.30 Rh 2.50 Rh/Ni 4.00 Au/Rh/Ni
				
H	K	KF		
2.50 Ni 2.60 Ni 3.00 Ni/Rh 4.20 Rh	1.80 Rh 3.00 Ni	2.60 Ni 4.00 Ni		

1060



1060/5




1060-D2




1060-C6



1060-BA1



H 2050 L



H 2060 LST



How to order:

1060 - A - 1.5 N - Au - 4.0

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1051 • 1061

- Stable design
- Increased extension height
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	4.00 mm/160 mil
Full travel	7.00 mm
Working travel	5.60 mm
Pre-loaded spring force	0.15/0.25/0.40/0.60 N
Spring force at working travel	0.70/0.80/1.50/3.00 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	≤ 35 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Nickel silver, unplated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

Tip style · Diameter · Plating




B	BA
1.80 Ni	1.80 Rh


1051

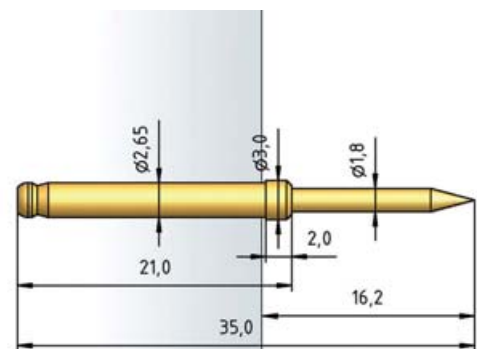


1061

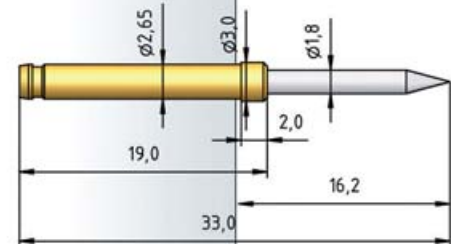

1061/5

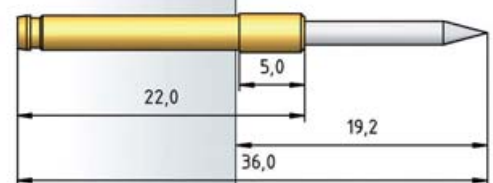

H 2050 L

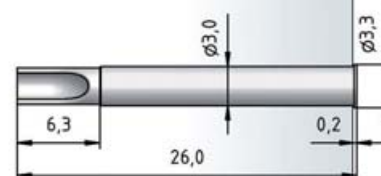

H 2050 LST



H 2060 LST



How to order:

1051 - B - 1.5 N - Ni - 1.8

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series 1054

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	3.50 mm/138 mil
Full travel	6.40 mm
Working travel	5.10 mm
Pre-loaded spring force	0.40/0.40/0.50/1.00 N
Spring force at working travel	1.00/1.50/2.50/3.00 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Nickel silver, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.71 mm
With pressed-in ring	2.89 mm
HGW 2372	2.67 mm
With pressed-in ring	2.85 mm

Tip style · Diameter · Plating


				
A	B	C	D	D
3.96 Au	1.52 Rh	3.96 Au	1.45C Au	2.36 Au 3.96 Au

		
E	F	G
2.36 Au/Rh 3.96 Au	1.45 Au	1.45 Ni

1054

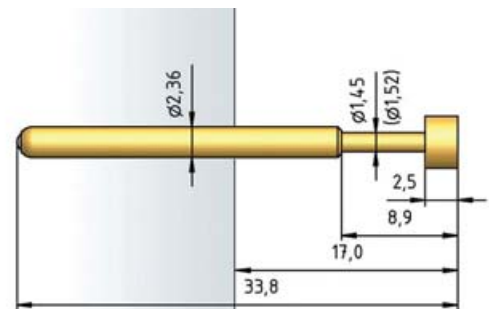

H 1054 L

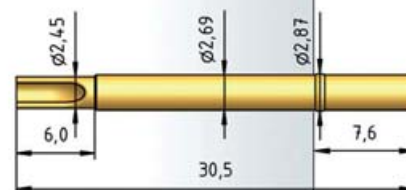

How to order:

1054 - C - 2.5 N - Au - 3.96C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1055

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

Mechanical Data

Center	4.75 mm/187 mil
Full travel	6.40 mm
Working travel	5.10 mm
Pre-loaded spring force	0.60/1.00 N
Spring force at working travel	2.25/4.75 N

Electrical Data

Max. current rating	8.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Nickel silver/Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel /CuBe, gold-plated or rhodium-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.54 mm
With pressed-in ring	3.60 mm

Tip style · Diameter · Plating




A	B	C	D2	D2
2.36 Rh	2.03 Rh	3.96 Rh	2.03C Rh	2.03C Au




G2

1.30 Rh

1055

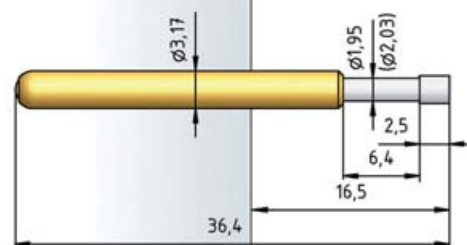

H 1055 L

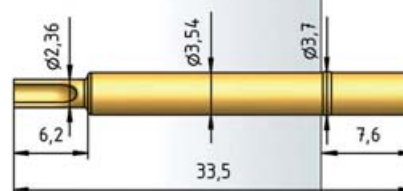

How to order:

1055 - A - 2.25 N - Rh - 2.36 C


1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series	Center
1007/G	1.27 mm
1010/G	1.50 mm
1015/G	2.54 mm
1015/G Position test	2.54 mm
1021/G	2.54 mm
1021/G Position test	2.54 mm
1028/G	2.54 mm
1042/G	4.50 mm
1060/G	4.00 mm
1060/G Position test	4.00 mm
1061/G	4.00 mm
5110/G	4.00 mm

Test probes with thread

Test probes with thread are mainly used in the automotive supply industry to test cable harnesses. The thread on the test probe and receptacle prevents the test probe from gradually twisting out of the receptacle, something which is aided by the spontaneous opening of the test module. Different sizes with centers from 1.27 to 4.0 mm with different tip styles and contact pressures provide a basis for almost all connectors which need testing. A constantly increasing range of test probes for position tests completes this range of products. A large selection of screwing tools and torque screwdrivers makes it easy to use these test probes with thread. Changing test conditions and connectors make it necessary to have new types on a regular basis, and this is why we also offer test probes to meet customers' individual requirements. Our lathe centre reacts quickly to your needs.

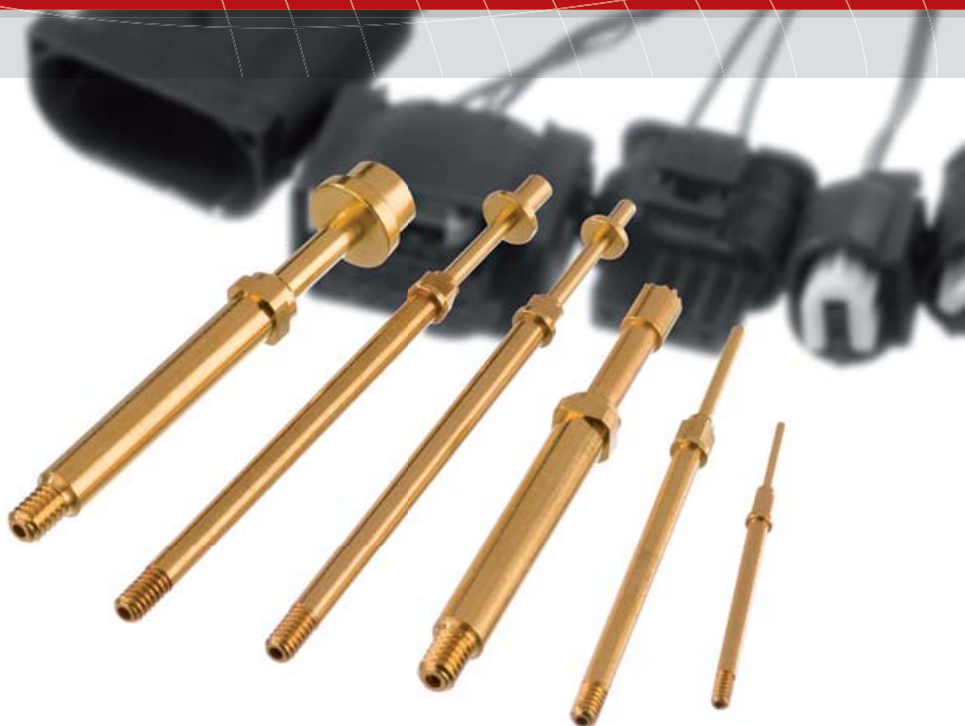

Series 1007/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	1.27 mm/50 mil
Full travel	5.00 mm
Working travel	4.00 mm
Pre-loaded spring force	0.20 N
Spring force at working travel	1.10 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	0.99 mm
HGW 2372	1.00 mm

Tip style · Diameter · Plating



B	C	D	F
0.40C Au	0.90C Au	0.64C Au	0.64C Au


D7001

0.60C Au

Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D7001	0.60	1.00	1.80	29.70	11.30


D7002

0.60C Au


Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D7002	0.60	1.00	2.60	30.50	12.10


D7003


0.50C Au

Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D7003	0.50	0.90	1.40	29.30	10.90


1007/G

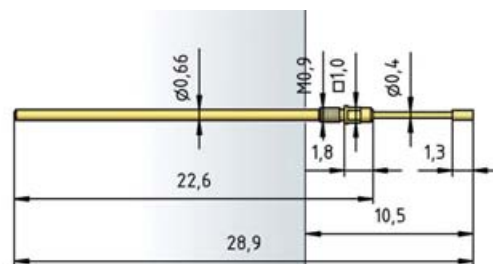


1007/G-D7001

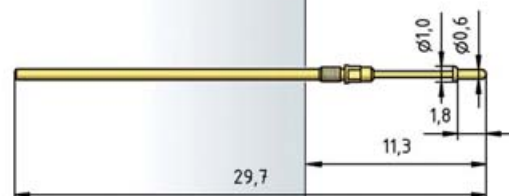


1007/G-D7002

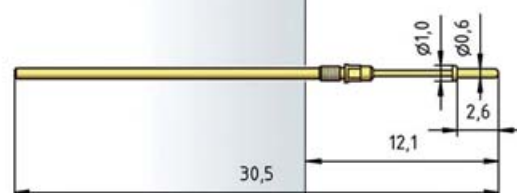

1007/G-D7003

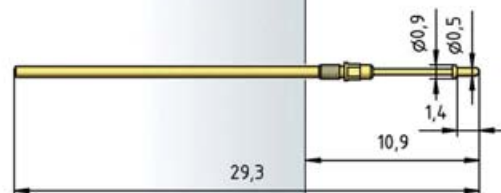

H 1007/G-L

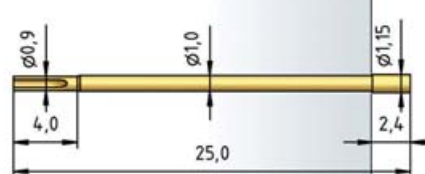

How to order:

1007/G - B - 1.1 N - Au - 0.4 C

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1010/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	1.91 mm/75 mil
Full travel	3.00 mm
Working travel	2.40 mm
Pre-loaded spring force	0.20 N
Spring force at working travel	0.80 N

Electrical Data

Max. current rating	3.0 - 4.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, gold-plated
Plunger	Steel/CuBe
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.25 mm
HGW 2372	1.26 mm


Tip style · Diameter · Plating

				
A	B	B1	C	D
0.50 Au	0.45 Au	0.70 Au	1.50C Au	0.50 Au


				
D	DF	D2	D2	F
0.65 Au 1.00 Au/Ni	1.00 Au	0.40 Au	0.60 Au	1.00 Au 1.50 Au

	
G	H
1.50 Rh	1.50C Ni

1010/G

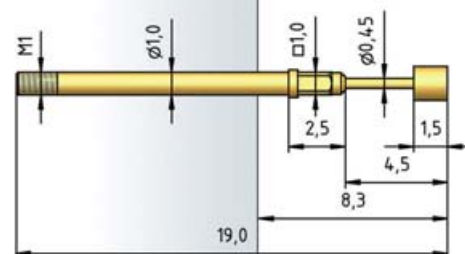

H 1010/GR-L

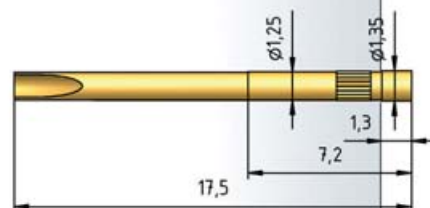

How to order:

1010/G - D - 0.8 N - Au - 1.0C
 1 2 3 4 5 6 7

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1015/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.40 mm
Working travel	3.50 mm
Pre-loaded spring force	0.25/0.40/0.40/ 0.30/0.70/0.60 N
Spring force at working travel	0.70/1.00/1.50/ 1.70/2.50/3.00 N

Electrical Data

Max. current rating	3.0 - 5.0 A
Typical continuity resistance	<= 20 mOhm



Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe/Plastic
Receptacle	Brass, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	1.68...1.70 mm
HGW 2372	1.68...1.70 mm


Tip style · Diameter · Plating

				
A	B	BS	C	C15
1.80 Au/Ni	0.75 Au/Rh/Ni	0.38 Au/Ni	1.00 Au 1.30 Au 1.80 Au/Ni	1.37 Au/HTK
				
C25	C15	D	D	E
1.80 Au/HTK	1.80 Au	0.50 Ni 0.65 Au/Ni 0.75 Au/Rh	1.25 Au/Ni	1.80 Au/Ni
				
F	F	G	H	K
0.75 Rh	1.50C Au 1.80 Rh	1.30 Rh 1.80 Au/Ni	1.30 Rh 1.80 Au	1.80 Au/Ni


1015/G

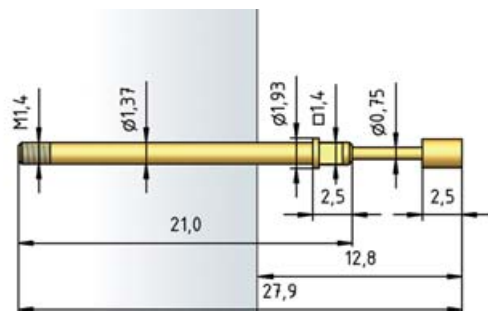

1015/G-C15

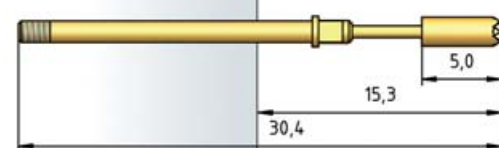

H 1015/GR-L

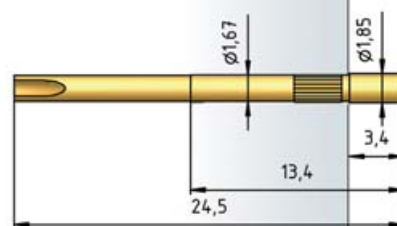

H 1015/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on. Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1015/G - A - 1.5 N - Au - 1.8C
1 2 3 4 5 6 7

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1015/G

- Test probe for cable harness testing
- Test probe geometry for position test
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	2.54 mm/100 mil
Full travel	4.40 mm
Working travel	3.50 mm
Pre-loaded spring force	0.25/0.40/0.40/ 0.30/0.70/0.60 N
Spring force at working travel	0.70/1.00/1.50/ 1.70/2.50/3.00 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

H1015/GR

HP 2361.1 (Trolitax)	1.68...1.70 mm
HGW 2372	1.68...1.70 mm



Dxxx

Au

Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D1001	0.65	1.50 mm	4.00 mm	29.90 mm	14.80 mm
D1002	0.65	1.50 mm	2.80 mm	28.70 mm	13.60 mm
D1003	0.65	1.50 mm	3.30 mm	29.20 mm	14.10 mm
D1004	0.65	1.50 mm	3.40 mm	29.30 mm	14.20 mm
D1005	0.70	1.50 mm	4.00 mm	29.90 mm	14.80 mm
D1006	0.65	1.40 mm	5.50 mm	31.40 mm	16.30 mm
D0615	0.65	1.50 mm	1.50 mm	27.40 mm	12.30 mm
D0620	0.65	1.50 mm	2.00 mm	27.90 mm	12.80 mm
D0625	0.65	1.50 mm	2.50 mm	28.40 mm	13.30 mm
D0630	0.65	1.50 mm	3.00 mm	28.90 mm	13.80 mm
D0635	0.65	1.50 mm	3.50 mm	29.40 mm	14.30 mm
D0645	0.65	1.50 mm	4.50 mm	30.40 mm	15.30 mm
D0650	0.65	1.50 mm	5.00 mm	30.90 mm	15.80 mm




Dxx


Au

Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D72	0.64	1.50 mm	3.40 mm	27.90 mm	12.80 mm
D72	0.75	1.50 mm	3.40 mm	27.90 mm	12.80 mm
D77	0.65	1.50 mm	4.00 mm	28.40 mm	13.30 mm

1015/G

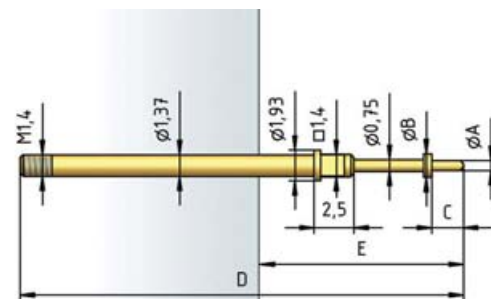

H 1015/GR-L

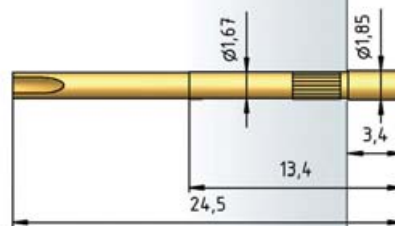

H 1015/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1015/G - D1001 - 1.5 N - Au - 0.65x4.0 1.5

1 2 3 4 5 6 7 8

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip length 8. Plate diameter

Series 1021/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Pre-loaded spring force	0.30/0.40/0.50/ 0.70/1.00/1.00 N
Spring force at working travel	0.70/1.00/1.50/ 2.25/3.00/5.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 25 mOhm




Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/Plastic
Receptacle	Brass, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.03 mm


Tip style · Diameter · Plating

				
A	B	BST	C	C1S
2.00 Au/Ni/Rh	0.65 Ni 0.80 Au/Ni/Rh 1.00 Au/Ni	0.80 Au	1.30 Au/Ni/Rh 1.50 Au 1.80 Au/Ni/Rh 2.00 Au/Ni 2.30 Rh 2.50 Ni 3.00 Rh	2.00 Au/HTK
				
C5S	D	D	D1	F
2.50 Au/HTK	0.65 Au/Ni 0.80 Au 1.00 Au	1.30 Au/Ni 1.40 Au 1.80 Ni 2.00 Au	0.65 Au/Ni	0.80 Au 1.00 Au/Ni
				
F	F1	G	H	K
1.50 Au 1.80 Au 2.00 Au/Ni	0.65 Ni	1.30 Ni 1.80 Au/Rh 2.00 Au	1.80 Rh 2.00 Rh	1.15 Ni 1.75 Rh 2.00 Rh
				
M	Q			
1.80 Rh	1.00 Ni 1.30 Au/Ni			


1021/G

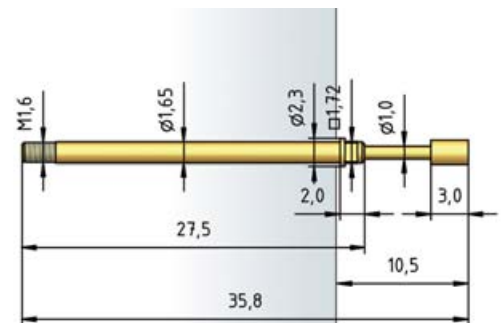

H 1021/GR-L

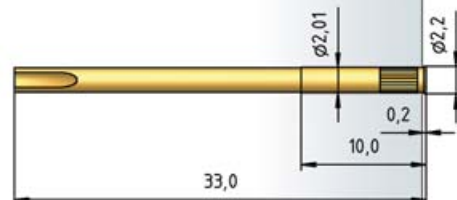

H 1021/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1021/G - F - 1.5 N - Au - 2.0

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

- ## Mechanical Data

Electrical Data

Materials

Recommended diameter of drill



Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D0615	0.65	1.80 mm	1.50 mm	34.80 mm	9.50 mm
D0620	0.65	1.80 mm	2.00 mm	35.30 mm	10.00 mm
D0630	0.65	1.80 mm	3.00 mm	36.30 mm	11.00 mm
D0635	0.65	1.80 mm	3.50 mm	36.80 mm	11.50 mm
D0640	0.65	1.80 mm	4.00 mm	37.30 mm	12.00 mm
D0645	0.65	1.80 mm	4.50 mm	37.80 mm	12.50 mm
D0650	0.65	1.80 mm	5.00 mm	38.30 mm	13.00 mm
D0815	0.80	1.80 mm	1.50 mm	34.80 mm	9.50 mm
D0820	0.80	1.80 mm	2.00 mm	35.30 mm	10.00 mm
D0825	0.80	1.80 mm	2.50 mm	35.80 mm	10.50 mm
D0830	0.80	1.80 mm	3.00 mm	36.30 mm	11.00 mm
D0835	0.80	1.80 mm	3.50 mm	36.80 mm	11.50 mm
D0840	0.80	1.80 mm	4.00 mm	37.30 mm	12.00 mm
D0845	0.80	1.80 mm	4.50 mm	37.80 mm	12.50 mm
D0850	0.80	1.80 mm	5.00 mm	38.30 mm	13.00 mm
D1005	0.80	2.50 mm	2.80 mm	36.10 mm	10.80 mm
D1006	0.80	3.50 mm	3.20 mm	36.50 mm	11.20 mm
D1007	1.00	2.50 mm	2.60 mm	35.90 mm	10.60 mm
D1010	0.80	2.50 mm	4.60 mm	37.90 mm	12.60 mm
D1011	0.80	1.95 mm	2.80 mm	36.10 mm	10.80 mm
D1012	0.65	3.00 mm	3.40 mm	36.70 mm	11.40 mm
D1013	0.65	1.80 mm	2.50 mm	35.80 mm	10.50 mm
D1014	0.80	2.50 mm	4.00 mm	37.30 mm	12.00 mm
D1015	0.80	2.30 mm	3.20 mm	36.50 mm	11.20 mm
D1018	0.65	1.50 mm	5.00 mm	38.30 mm	13.00 mm
D1019	1.00	1.80 mm	2.00 mm	35.30 mm	10.00 mm
D1020	0.65	1.80 mm	3.60 mm	36.90 mm	11.60 mm
D1024	0.65	1.50 mm	4.30 mm	37.60 mm	12.30 mm
D1906	0.80	3.50 mm	3.20 mm	36.50 mm	11.20 mm
D1907	1.00	2.50 mm	2.60 mm	35.90 mm	10.60 mm
D1910	0.80	2.50 mm	4.60 mm	37.90 mm	12.60 mm
D1914	0.80	2.50 mm	4.00 mm	37.30 mm	12.00 mm
D1915	0.80	2.30 mm	3.20 mm	36.50 mm	11.20 mm



Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D7017	0.65	1.50 mm	2.70 mm	36.00 mm	10.70 mm



Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
F0015	1.00	1.80 mm	1.50 mm	34.80 mm	9.50 mm
F0020	1.00	1.80 mm	2.00 mm	35.30 mm	10.00 mm
F0025	1.00	1.80 mm	2.50 mm	35.80 mm	10.50 mm
F0030	1.00	1.80 mm	3.00 mm	36.30 mm	11.00 mm
F0035	1.00	1.80 mm	3.50 mm	36.80 mm	11.50 mm
F0040	1.00	1.80 mm	4.00 mm	37.30 mm	12.00 mm
F0045	1.00	1.80 mm	4.50 mm	37.80 mm	12.50 mm
F0050	1.00	1.80 mm	5.00 mm	38.30 mm	13.00 mm
F1001	1.30	2.50 mm	3.00 mm	36.30 mm	11.00 mm
F1008	1.00	2.30 mm	3.30 mm	36.60 mm	11.30 mm
F1009	1.00	2.50 mm	3.50 mm	36.80 mm	11.50 mm
F1016	1.50	3.00 mm	2.50 mm	35.80 mm	10.50 mm
F1021	0.70	1.80 mm	2.00 mm	35.30 mm	10.00 mm
F1033	0.70	1.80 mm	1.50 mm	34.80 mm	9.50 mm
F1901	1.30	2.50 mm	3.00 mm	36.30 mm	11.00 mm
F1908	1.00	2.30 mm	3.30 mm	36.60 mm	11.30 mm
F1916	1.50	3.00 mm	2.50 mm	35.80 mm	10.50 mm



How to order:

1021/G - D1013 - 1.5 N - Au - 0.65x 2.5 1.8

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip length 8. Plate diameter

Series 1028/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Pre-loaded spring force	0.30/0.40/0.60/ 0.80/1.10/1.30 N
Spring force at working travel	0.70/1.00/1.50/ 2.25/3.00/5.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 25 mOhm

Materials



Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill

H1021/GR

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.03 mm


Tip style · Diameter · Plating

				
A	B	BST	C	CSM
1.50 Au 1.80 Ni	1.30 Rh	0.80 Au	1.40 Au 1.80 Rh 2.50 Rh 3.50 Rh	1.30 Au
				
D	D1	EB	F	G
1.40 Au	0.65 Ni 0.80 Ni	1.80 Au	1.30 Au	1.30 Ni 1.50 Rh
				
H	H	K	M	Q
1.30 Au	1.40 Au 1.80 Au	1.30 Au 1.75 Ni	2.00 Rh	1.30 Au
				
Q	Q5	Q8	V	
1.80 Au 2.00 Au	1.30 Ni	2.30 Ni	1.30 Ni	

1028/G

H 1021/GR-C

H 1021/GR-L

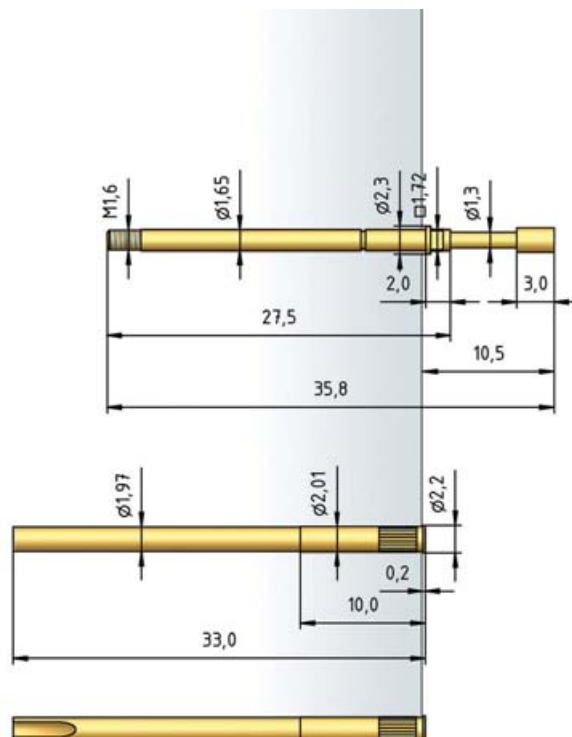

How to order:

1028/G - A - 1.5 N - Ni - 1.8

1 2 3 4 5 6

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

Series 1042/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	4.50 mm/177 mil
Full travel	7.00 mm
Working travel	5.60 mm
Pre-loaded spring force	0.40/0.80/0.80 N
Spring force at working travel	1.50/3.00/5.00 N

Electrical Data

Connector - receptacle

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 30 mOhm

Connector - plunger

Max. current rating	12.0 - 15.0 A
Typical continuity resistance	<=10 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.50 mm
HGW 2372	3.52 mm


Tip style · Diameter · Plating




C

3.00 Au
4.00C Au

1042/G

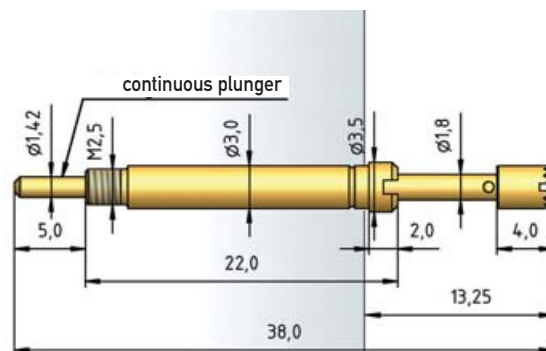

H 1042/G



How to order:

1042/G - C - 1.5 N - Au - 4.0 C

1 2 3 4 5 6 7

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1060/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.50 mm
Working travel	4.40 mm
Pre-loaded spring force	0.20/0.20/0.40/ 0.50/0.80/0.70 N
Spring force at working travel	0.40/0.60/1.50/ 2.25/3.00/5.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 30 mOhm





Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

Tip style · Diameter · Plating

				
A	B	BA	BA1	C
2.50 Ni 4.00 Au	1.80 Rh/Ni	1.80 Au/Ni	1.50 Ni	2.30 Au/Ni/Rh 2.50 Au/Ni/Rh 3.00 Au/Ni/Rh 4.00 Au/Ni/Rh
				
C6	D	D	D	D2
3.50 Au/Ni	1.00 Rh	1.80 Au	2.30 Au/Ni 2.50 Au/Ni	3.00 Au/Ni
				
D3	F	F	F3	G
0.80 Rh 1.40 Au	1.80 Au/Ni	2.30 Au/Rh 2.50 Rh 3.00 Au 4.00 Rh	1.00 Rh 1.40 Au	2.30 Rh 2.50 Rh/Ni 4.00 Au/Rh/Ni
				
H	K	KF		
2.50 Ni 2.60 Ni 3.00 Ni/Rh 4.20 Rh	1.80 Rh 3.00 Ni	2.60 Ni 4.00 Ni		

1060/G


1060/G4

1060/G5

H 1060/G-L

H 1060/GR-L

H 1060/GRV-L

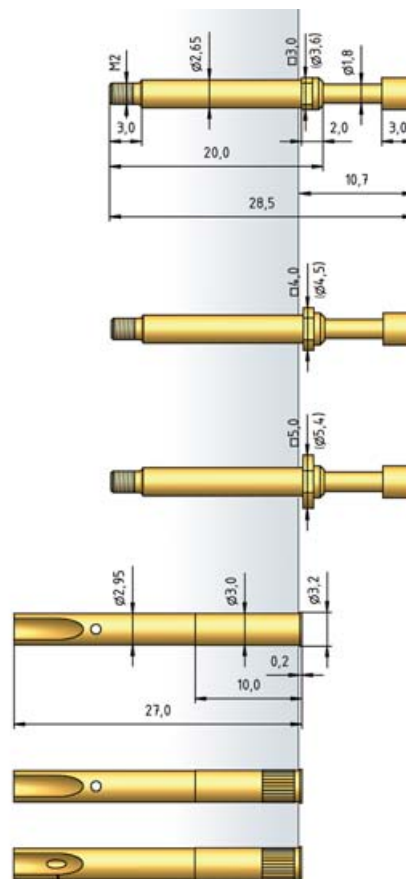

This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1060/G - A - 1.5 N - Au - 4.0

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

- | Mechanical Data | |
|--------------------------------|-------------------------------------|
| Center | 4.00 mm/160 mil |
| Full travel | 5.50 mm |
| Working travel | 4.40 mm |
| Pre-loaded spring force | 0.20/0.20/0.40/
0.50/0.80/0.70 N |
| Spring force at working travel | 0.40/0.60/1.50/
2.25/3.00/5.00 N |

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 30 mOhm

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm



BAx

Ni

Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
BA2	1.80	4.00 mm	3.00 mm	29.00 mm	11.20 mm
BA3	1.80	4.00 mm	2.50 mm	29.00 mm	11.20 mm
BA5	1.80	4.00 mm	2.50 mm	28.50 mm	10.70 mm
BA7	1.80	4.00 mm	2.10 mm	29.00 mm	11.20 mm



C42

Ni


Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
C42	4.00	5.00 mm	1.00 mm	28.50 mm	10.70 mm



Dxxxx

Au


Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
D1001	1.40	3.50 mm	2.40 mm	28.90 mm	11.10 mm
D1002	1.40	3.50 mm	4.00 mm	30.50 mm	12.70 mm
D1003	1.40	3.50 mm	3.30 mm	29.80 mm	12.00 mm
D1004	1.00	3.50 mm	4.00 mm	30.50 mm	12.70 mm
D1013	1.00	3.50 mm	2.80 mm	29.30 mm	11.50 mm
D1904	1.00	3.50 mm	4.00 mm	30.50 mm	12.70 mm



Fxxx

Au

Tip styles	Tip diameter mm A	Plate diameter mm B	Tip length mm C	Overall length mm D	Extension height mm E
F11	1.30	4.70 mm	7.00 mm	33.50 mm	15.70 mm
F12	1.30	4.70 mm	5.00 mm	33.50 mm	15.70 mm
F13	1.30	4.70 mm	2.00 mm	30.50 mm	12.70 mm
F14	2.60	4.00 mm	1.80 mm	29.00 mm	11.20 mm
F33	2.00	4.00 mm	2.50 mm	36.00 mm	18.70 mm
F40	1.50	4.00 mm	2.65 mm	28.50 mm	10.70 mm
F41	4.00	4.70 mm	2.00 mm	28.50 mm	10.70 mm
F1007	1.30	4.70 mm	5.30 mm	31.80 mm	14.00 mm
F1008	1.40	3.50 mm	2.00 mm	28.50 mm	10.70 mm
F1009	4.00	5.00 mm	2.00 mm	28.50 mm	10.70 mm
F1010	1.40	3.50 mm	1.70 mm	28.20 mm	10.40 mm
F1011	2.30	3.50 mm	2.00 mm	28.50 mm	10.70 mm
F1012	1.40	3.50 mm	3.00 mm	29.50 mm	11.70 mm
F1015	2.30	3.50 mm	1.80 mm	28.30 mm	10.50 mm
F1016	1.30	4.70 mm	3.60 mm	30.10 mm	12.30 mm
F1017	1.30	4.70 mm	2.70 mm	29.20 mm	11.40 mm
F1018	1.80	4.50 mm	1.50 mm	28.00 mm	10.20 mm
F1907	1.30	4.70 mm	5.30 mm	31.80 mm	14.00 mm
F1909	4.00	5.00 mm	2.00 mm	28.50 mm	10.70 mm
F1916	1.30	4.70 mm	3.60 mm	30.10 mm	12.30 mm
F1917	1.30	4.70 mm	2.70 mm	29.20 mm	11.40 mm

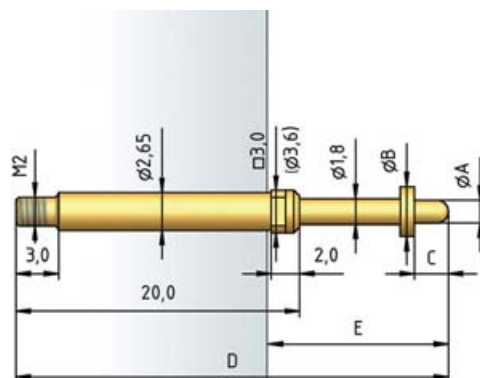

1060/G-T

1060/G - D1013 - 1.5 N - Au - 1.00x 2.8 3.5

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip length 8. Plate diameter

Receptacles see page 85

Series 1061/G

- Test probe for cable harness testing
- Increased extension height
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	4.00 mm/160 mil
Full travel	7.00 mm
Working travel	5.60 mm
Pre-loaded spring force	0.40/0.60 N
Spring force at working travel	1.50/3.00 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	≤ 35 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

Tip style · Diameter · Plating




B	BA
1.80 Ni	1.80 Rh

1061/G

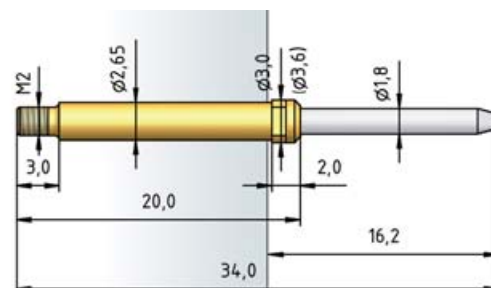

H 1060/G-L

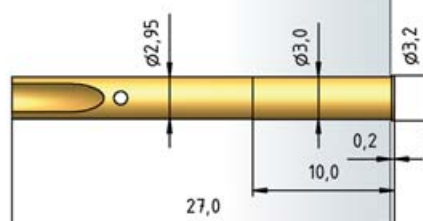

H 1060/GR-L



H 1060/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1061/G - B - 1.5 N - Ni - 1.8

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

Series 5110/G

- Test probe for cable harness testing
- Compact design
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	4.00 mm/160 mil
Full travel	3.50 mm
Working travel	2.80 mm
Pre-loaded spring force	0.25/0.30/0.45/ 0.50/1.00 N
Spring force at working travel	0.80/1.20/1.50/ 2.50/3.50 N

Electrical Data

Max. current rating	10.0 A
Typical continuity resistance	<= 10 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.64 mm
HGW 2372	2.65 mm

Tip style · Diameter · Plating


				
C	D	D1	E	F
2.30C Au 3.50C Au	2.30C Au	2.30C Au	2.30C Au	2.30C Au




5110/G




5110/G-K2

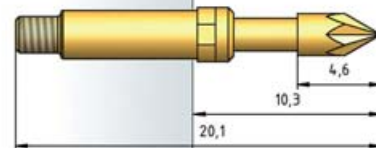

5110/G-D1

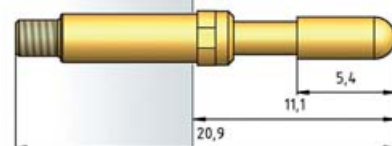

H 5110/GR

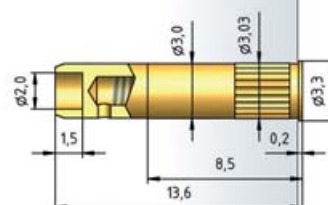

How to order:

5110/G - D - 1.5 N - Au - 2.3 C
 1 2 3 4 5 6 7

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series	Center
1021/GV	2.54 mm
2053	2.54 mm
1053	5.00 mm
1053/G	4.00 mm

Non-rotating test probes

Non-rotating test probes are always used for the precisely-positioned contact-creation of a connector barrel. This is normally the case in the testing of flat connectors, as used for example in fuse holders. Contacting then takes place with rectangular so-called spade-shaped tip styles. Two construction principles are mainly used in order to fix the test probe in position. The purpose of these principles is to create a compulsory guide for the plunger in the test probe barrel. In the simple design, the plunger is guided in the barrel by means of a bolt-groove system. The test probe must be inserted into the receptacle in exactly the right position. If maintenance is needed, the newly-placed test probe must be repositioned.

It is easier to carry out the procedure with a plunger whose end is flattened and has a guide slot at the end of the receptacle. With this principle, the receptacle is placed in position only once. For every new assembly, the test probe is then always returned to the same position via the guide slot of the receptacle.



Series 1021/GV

- Non-rotating feature ensured by the square section on the plunger and the slot in the receptacle
- Forced guidance of the test probe ensures that the receptacle must only be aligned once

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm (4.30 mm only with Y4, 4.15 mm with Y14)
Working travel	4.00 mm
Pre-loaded spring force	0.30/1.00 N
Spring force at working travel	1.50/3.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 25 mOhm

Materials






Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated





Recommended diameter of drill

H1021/GVR

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.03 mm

Tip style · Diameter · Plating

				
Y4	Y	Y	Y1	Y5
1.50 x 0.50 Au	0.75 x 0.50 Au	0.97/1.00 x 0.63 Au	0.97/1.00 x 0.63 Au	1.50 x 0.80 Au

			
Y14	Y14	Y14	Y14
1.10 x 0.45 Au	2.00 x 0.60 Au	2.00 x 0.80 Au	1.50 x 1.00 Au


1021/GV

1021/GV Side view

1021/GV-Y5

H 1021/GVR

H1021/GVRV-L

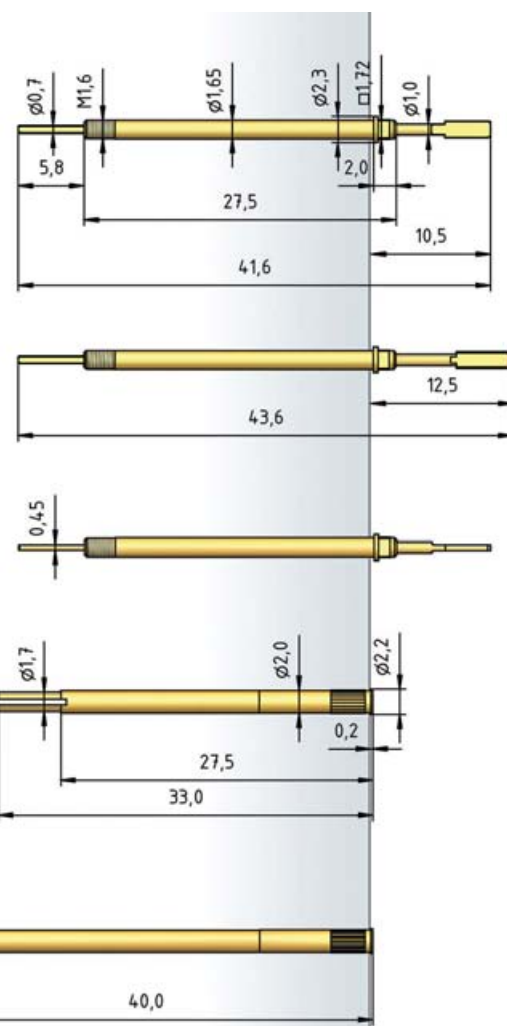

How to order:

1021/GV - Y4 - 1.5 N - Au - 1.5x0.5

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip thickness

Series 2053

- Non-rotating feature ensures forced guidance between plunger and barrel
- Knurled section on the barrel guarantees secure fit of the test probe

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.00 mm
Working travel	4.00 mm
Pre-loaded spring force	0.45/0.60/1.00 N
Spring force at working travel	1.50/3.00/5.00 N

Electrical Data

Max. current rating	5.0 - 8.0 A
Typical continuity resistance	<= 30 mOhm






Materials






Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated




Recommended diameter of drill

HP 2361.1 (Trolitax)	1.98...2.00 mm
HGW 2372	1.98...2.00 mm


Tip style · Diameter · Plating

				
Y1	Y21	Y1F	Y1F	Y1F
2.00 x 0.58 Au	2.00 x 0.50 Au	1.10 x 0.58 x 2.80 Au	1.50 x 0.50 x 2.00 Au	1.50 x 0.58 x 2.00 Au


				
Y1F	Y1F1	Y2F	Y3F	Y6
1.50 x 0.58 x 2.80 Au	1.50 x 0.58 x 2.80 x 2.00 Au	1.50 x 0.50 x 2.00 Rh	1.50 x 0.50 x 2.50 Au	3.00 x 1.55 Au

		
Y11	Y12	Y21R
2.00 x 0.58 Au	1.80 x 0.80 Au	2.00 x 0.50 Au

2053

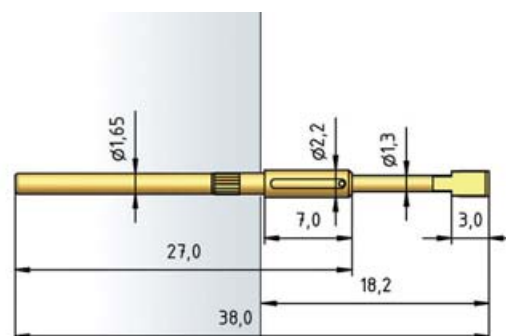

H 1021 L

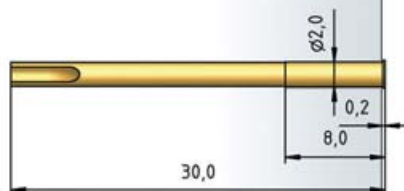

How to order:

2053 - Y1 - 1.5 N - Au - 2.0x0.58

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip thickness

Series 1053

- Non-rotating feature ensures forced guidance between plunger and barrel
- Knurled section on the barrel guarantees secure fit of the test probe

Mechanical Data

Center	5.00 mm/197 mil
Full travel	5.00 mm
Working travel	4.00 mm
Pre-loaded spring force	0.50/0.80/1.25 N
Spring force at working travel	1.50/3.00/5.00 N

Electrical Data

Max. current rating	8.0 A
Typical continuity resistance	<= 30 mOhm






Materials






Barrel	Brass, gold-plated
Spring	Spring steel/Stainless steel, gold-plated
Plunger	CuBe
Receptacle	Brass, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.00 mm


Tip style · Diameter · Plating

				
CY	Y	Y4	Y3	Y5
6.00 x 3.00 Au	5.00 x 1.00 Au/Ni	4.00 x 1.00 Ni	5.00 x 0.50 Ni	4.00 x 0.65 Ni

				
Y8	Y10	Y11	Y14	Y15
5.00 x 1.00 Au	3.00 x 0.80 Ni	2.25 x 0.65 Ni	3.80 x 0.40 Ni	4.50 x 1.00 Au


Y16
5.00 x 1.00 Au


1053-Y-Y4-Y15-CY

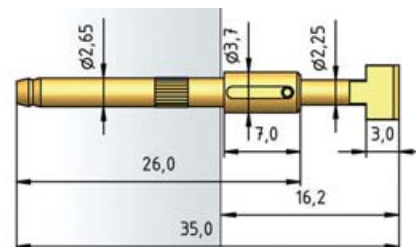

1053-Y8




1053-Y16

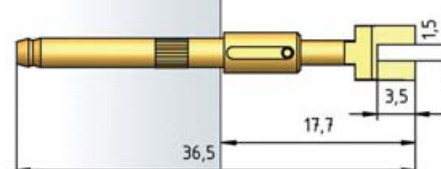

1053-Y3-Y5-Y10-Y11-Y14




H 1050 L



H 1050 L ST



H 1050 W



How to order:

1053 - Y - 1.5 N - Ni - 5.0x1.0

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip thickness

Series 1053/G

- Non-rotating feature ensured by the square section on the plunger and the slot in the receptacle
- Forced guidance of the test probe, so the receptacle must only be aligned once

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel (with switching element)	2.50 mm
Pre-loaded spring force	0.30/0.40/0.50/ 0.80/0.80/1.00 N
Spring force at working travel	0.50/1.50/2.00/ 3.00/4.00/5.00 N
With switching element	1.50/2.50/3.00/ 4.00/ 5.00/6.00 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill




HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.03 mm




How to order:

1053/G - Y4 - 1.5 N - Au - 4.0x0.65C
1 2 3 4 5 6 7 8


1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip thickness 8. Tip material (only for CuBe)

Tip style · Diameter · Plating

				
Y	Y	Y3	Y4	Y5
3.00 x 1.00C Au	5.00 x 1.00C Au	5.00 x 0.50C Au	4.00 x 1.00C Au	4.00 x 0.65C Au

		
Y8	Y11	Y15
5.00 x 0.70C Au	2.15 x 0.65C Au	3.00 x 0.70C Au


1053/G

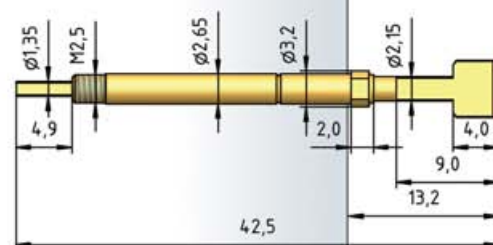

1053/G-Y8




1053/G-Y15

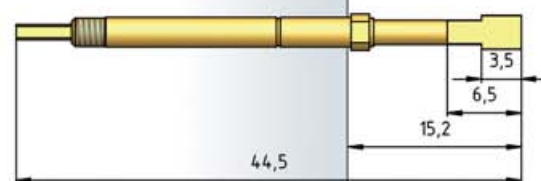


1053/G Side view



H 1053/GVRV-L

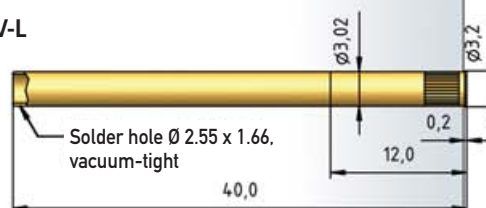

H 1053/GRV-SEV

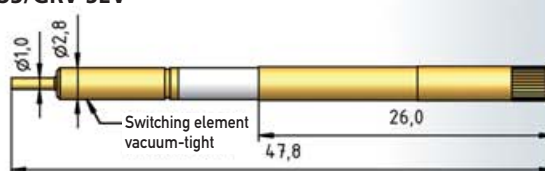

Series	Center	Switching travel	Series	Center	Switching travel
3010/2(G) • 3010/10(G)	4.00 mm	SH 1.70 mm	3011/2GS	4.00 mm	SH 4.00 mm
3010/2(G) • 3010/10(G)	4.00 mm	SH 4.00 mm	3012/2GS	4.00 mm	SH 1.70 mm
3010/2F	4.00 mm		3012/2GS	4.00 mm	SH 4.00 mm
3010/2V	4.00 mm		3012/2GS-F51	4.00 mm	SH 1.70 mm
3020 • 3020/2G	2.54 mm	SH 2.60 mm	3012/2GS-F51	4.00 mm	SH 4.00 mm
3020 • 3020/2G	2.54 mm	SH 1.70 mm	3014/2G	4.00 mm	
3030	2.54 mm		3020/2GW5	2.54 mm	SH 2.60 mm
3035	1.91 mm		3020/2GW5	2.54 mm	SH 4.00 mm
3010/2GW(5)	4.00 mm	SH 1.70 mm	3023/2GS	2.54 mm	
3010/2GW(5)	4.00 mm	SH 4.00 mm	3024/2G	2.54 mm	
3011/2GS	4.00 mm	SH 1.70 mm	3030/GW3	2.54 mm	

Switching test probes

Switching test probes are available in various designs, from simple plug-in types to threaded types to easy-replacement systems. Depending on the series used, centers from 4.0 mm to 1.27 mm can be achieved. In each case, electrical connection is via a connection on the pin of the switching test probe and one on the receptacle. If maintenance or replacement assembly is required, always release the connection on the pin and rewire. It is better to make use of the types which have an easy-replacement system. Wiring takes place completely once only on the receptacle, which has an insulated socket in its end, and this ensures electrical separation. The switching test probe is fitted with a connector pin which, when it is being screwed into the receptacle, is guided directly into this socket. If maintenance is required, it is only necessary to replace the contact – no rewiring is needed.

Series 3014 and 3024, which have an overall length of only 24.5 mm, are especially compact. As an alternative, both series are available with the easy-replacement system.

Series 3015, with its ball-shaped design and a working travel of only 0.8 mm, is especially suitable for applications in which horizontal contact-ing is necessary.



Series 3010/2(G) • 3010/10(G)

- Switching test probe for the cable harness test
- Plug-in and threaded type
- Switching travel 1.7 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/ 5.00/4.00 N
Spring force at working travel	1.25/1.75/2.30/2.80/ 4.00/7.00/7.50/9.00/ 9.50/10.00/10.50/ 13.00/13.50 N
Spring force at switching travel	0.20/0.45/0.75/1.00/ 1.60/3.60/3.60/4.40/ 4.80/5.40/5.20/8.00/ 7.60 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3010-16/22/S-23

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

H3010/GS-26

HP 2361.1 (Trolitax)	3.28 mm
HGW 2372	3.29 mm

Connector pin Ø X/mm	Connector pin length Y/mm
0,5	6,0
1,0	2,5
1,0	4,0

How to order:


3010/2 G - A - 2.3 N - Au - 2.3/1.0x4.0
1 2 3 4 5 6 7 8 9

1. Series 2. Collar height 3. Threaded design 4. Tip style 5. Contact pressure
 6. Tip plating 7. Tip diameter 8. Connector pin diameter
 9. Connector pin length


Tip style · Diameter · Plating



A	C	C	CL	C1
2.30 Au	1.80 Au	2.30 Au 3.00 Au 4.00 Au	2.30 Au	1.00 Au




CL1	CL2	CL3	D6	F
1.00 Au	1.80 Au	1.00 Au	1.00 Au	1.80 Au



F	F1	FL3	H2
2.00 Au 2.30 Au	2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK	1.00 Au	2.60 Au

3010/2

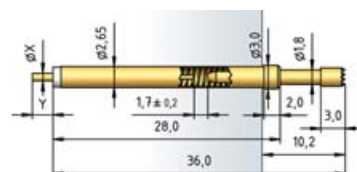

3010/2-CL




3010/10




3010/10-CL



H 3010-16



H 3010-22




H 3010/S-23




3010/2G



3010/10G



H 3010/GS-26



Series 3010/2(G) • 3010/10(G)

- Switching test probe for the cable harness test
- Plug-in and threaded type
- Switching travel 4.0 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N
Spring force at switching travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3010-16/22/S-23

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

H3010/GS-26

HP 2361.1 (Trolitax)	3.28 mm
HGW 2372	3.29 mm

Connector pin Ø X/mm	Connector pin length Y/mm
0,5	6,0
1,0	2,5
1,0	4,0

How to order:

3010/2 G - A - 2.3 N - Au - 2.3/ 1.0x4.0/SH4.0


1 2 3 4 5 6 7 8 9 10

1. Series 2. Collar height 3. Threaded design 4. Tip style 5. Contact pressure
6. Tip plating 7. Tip diameter 8. Connector pin diameter
9. Connector pin length 10. Switching travel


Tip style · Diameter · Plating



A	C	C	CL	C1
2.30 Au	1.80 Au	2.30 Au 3.00 Au 4.00 Au	2.30 Au	1.00 Au




CL1	CL2	CL3	D6	F
1.00 Au	1.80 Au	1.00 Au	1.00 Au	1.80 Au



F	F1	FL3	H2
2.00 Au 2.30 Au	2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK	1.00 Au	2.60 Au

3010/2

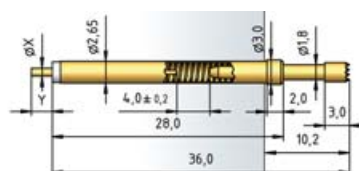

3010/2-CL




3010/10




3010/10-CL



H 3010-16



H 3010-22



H 3010/S-23




3010/2G



3010/10G



H 3010/GS-26



Series 3010/2F

- Switching test probe for the cable harness test
- Plug-in system
- „Opener“ type
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.40 N
Spring force at working travel	2.30 N
Spring force at switching travel	1.00 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V


Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

Tip style · Diameter · Plating




C	CL1	F1
2.30 Au	1.00 Au	3.00 HTK
		4.00 HTK
		5.00 HTK

3010/2 F

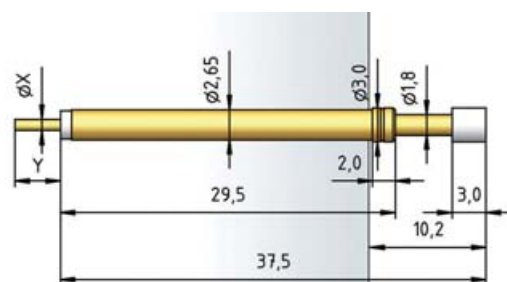

H 3010-16



H 3010-22



H 3010/S-23



How to order:

3010/2 F - F - 2.3 N - Au - 2.3/1.0x4.0

1 2 3 4 5 6 7 8 9

- Series
- Collar height
- Opener type
- Tip style
- Contact pressure
- Tip plating
- Tip diameter
- Connector pin diameter
- Connector pin length

Series 3010/2V

- Switching test probe for the cable harness test
- Plug-in system
- Non-rotating Variant
- Soldering temperature max. 300°C



Mechanical Data	
Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.12/0.30/1.80/ 1.70/2.70/5.00 N
Spring force at working travel	1.25/2.30/7.00/ 9.00/10.00/13.00 N
Spring force at switching travel	0.18/0.70/3.60/ 4.40/5.40/8.00 N

Electrical Data	
Receptacle - plunger	
Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm
Pin - plunger	
Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V


Materials	
Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill	
H3010-16/22/S-23	
HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm


How to order:									
3010/2 V - Y - 2.3 N - Au - 1.9x1.0 / 1.0x4.0									
1	2	3	4	5	6	7	8	9	10
1. Series 2. Collar height 3. Non-rotating design 4. Tip style									
5. Contact pressure 6. Tip plating 7. Tip diameter 8. Tip thickness									
9. Connector pin diameter 10. Connector pin length									

Tip style · Diameter · Plating	
	
Y	Y5
1.90 x 1.00 Au	4.00 x 0.65 Au


3010/2V

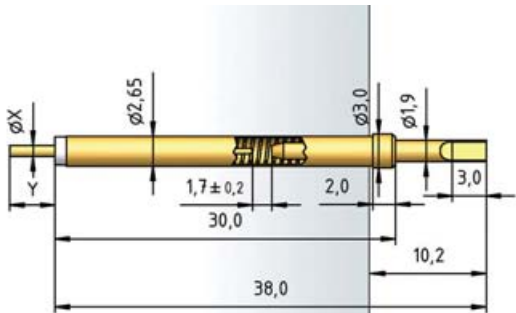

H 3010-16



H 3010-22



H 3010/S-23



Series 3020 • 3020/2G

- Switching test probe for the cable harness test
- Plug-in and threaded type
- Monitoring of components or periphery
- Switching travel 2.6 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Switching travel	2.60 mm
Pre-loaded spring force	0.15/0.40/0.50/1.70 N
Spring force at working travel	0.80/1.50/3.00/6.50 N
Spring force at switching travel	0.25/0.80/1.80/4.50 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3020(S-26)

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.01 mm

H3020/GS-26

HP 2361.1 (Trolitax)	2.15 mm
HGW 2372	2.16 mm

How to order:

3020/2 G - F - 1.5 N - Au - 1.5
 1 2 3 4 5 6 7

1. Series 2. Collar height 3. Threaded design 4. Tip style 5. Contact pressure
 6. Tip plating 7. Tip diameter

Tip style · Diameter · Plating




A	C	C3	F	F
1.50 Au	1.30 Au 1.50 Au 3.00 Au	1.50 Au	0.80 Au	1.00 Au 1.30 Au 1.50 Au



F1

1.50 HTK


3020

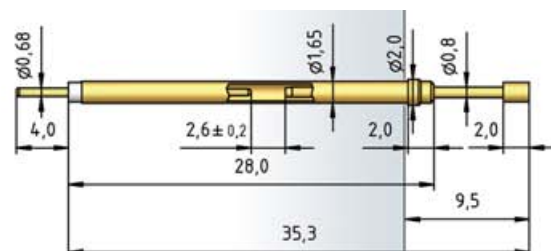

3020-C3



H 3020



H 3020/S-26




3020/2G



3020/2G-C3



H 3020/GS-26

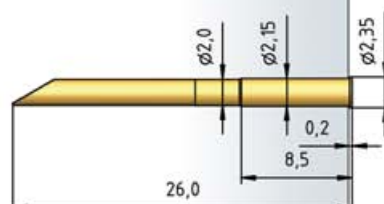

H 3020/GRS-26



Series 3020 • 3020/2G

- Switching test probe for the cable harness test
- Plug-in and threaded type
- Monitoring of components or periphery
- Switching travel 4.0 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.15/0.40/0.50/1.70 N
Spring force at working travel	0.30/1.00/2.50/6.00 N
Spring force at switching travel	0.30/1.00/2.50/6.00 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3020(/S-26)

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.01 mm

H3020/GS-26

HP 2361.1 (Trolitax)	2.15 mm
HGW 2372	2.16 mm

How to order:

3020/2G - F - 1.5 N - Au - 1.5/SH4.0
 1 2 3 4 5 6 7 8

1. Series 2. Collar height 3. Threaded design 4. Tip style 5. Contact pressure
 6. Tip plating 7. Tip diameter 8. Switching travel

Tip style · Diameter · Plating




A	C	C3	F	F
1.50 Au	1.30 Au 1.50 Au 3.00 Au	1.50 Au	0.80 Au	1.00 Au 1.30 Au 1.50 Au



F1

1.50 HTK


3020

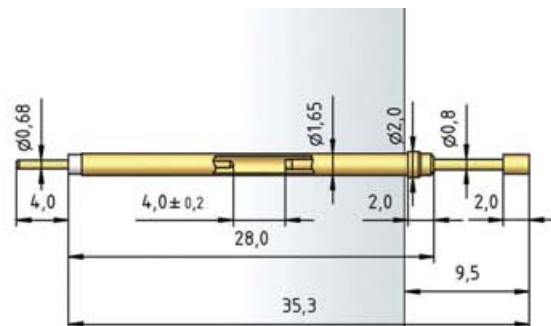


3020-C3



H 3020




H 3020/S-26




3020/2G



3020/2G-C3



H 3020/GS-26

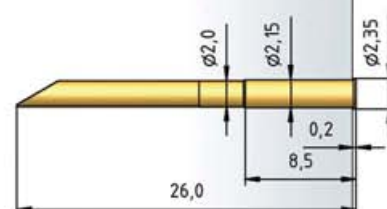

H 3020/GRS-26



Series 3030

- Switching test probe for the cable harness test
- Plug-in system
- Receptacle diameter only 1.83 mm (press ring)
- Soldering temperature max. 300°C
- Switching test probe with standard travel for small centers

Mechanical Data

Center	2.54 mm/100 mil
Full travel	6.30 mm
Working travel	5.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.30 N
Spring force at working travel	2.00 N
Spring force at switching travel	1.00 N

Electrical Data

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	
Typical insulating voltage	1000 V

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.65 mm
With pressed-in ring	1.75 mm
HGW 2372	1.67 mm
With pressed-in ring	1.76 mm

Tip style · Diameter · Plating




C	D	D1	DL	F
1.00 Au 1.30 Au	0.65 Au	0.65 Au	0.65 Au	1.00 Au




FL

0.70 Au


3030

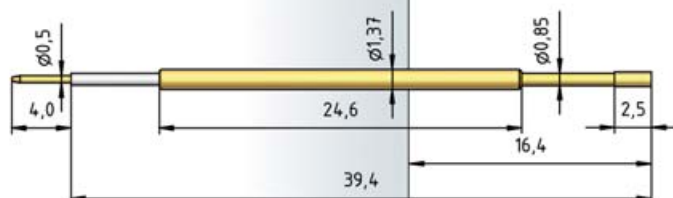

3030-L

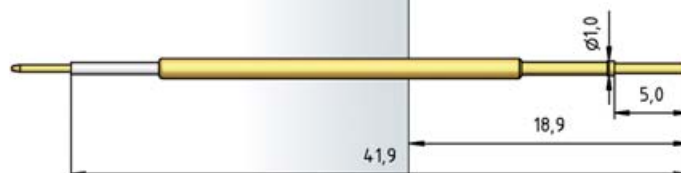

H 1025 C

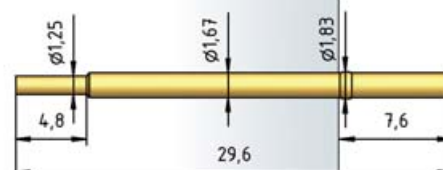

How to order:

3030 - C - 2.0 N - Au - 1.0/0.5x4.0

1 2 3 4 5 6 7

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Connector pin diameter 7. Connector pin length

Series 3035

- Switching test probe for the cable harness test
- Plug-in system
- Receptacle diameter only 1.41 mm (press ring)
- Soldering temperature max. 300°C
- Switching test probe with standard travel for small centers

Tip style · Diameter · Plating



C	F
0.80C Au	0.80C Au

Mechanical Data

Center	1.91 mm/75 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	2.60 mm
Pre-loaded spring force	0.30 N
Spring force at working travel	1.50 N
Spring force at switching travel	1.10 N

Electrical Data

Max. current rating	1.0 A
Typical continuity resistance	<=20 mOhm
Typical insulating voltage	1000 V


Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Bronze, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	1.30 mm
With pressed-in ring	1.36 mm
HGW 2372	1.32 mm
With pressed-in ring	1.37 mm

3035

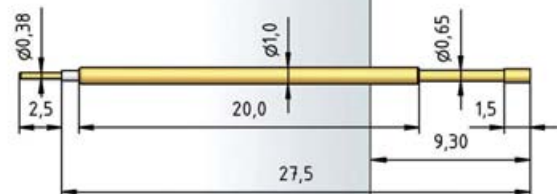

H 3035



How to order:

3035 - F - 2.0 N - Au - 0.8C

1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 3010/2GW(5)

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Switching travel 1.7 mm
- Soldering temperature max. 300°C
- Variable extension height (optional)

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	1.25/1.75/2.30/2.80/ 4.00/7.00/7.50/9.00/ 9.50/10.00/10.50/ 13.00/13.50 N
Spring force at switching travel	0.20/0.45/0.75/1.00/ 1.60/3.60/3.60/4.40/ 4.80/5.40/5.20/ 8.00/7.60 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3010/GW H3010/GW5

HP 2361.1 (Trolitax)	3.28 mm
HGW 2372	3.29 mm

H3010/GWR5


HP 2361.1 (Trolitax)	3.31 mm
HGW 2372	3.32 mm



How to order:



3010/2GW 5 - C - 1.3 N - Au - 2.3
 1 2 3 4 5 6 7 8 9

1. Series 2. Collar height 3. Threaded design 4. Interchangeable without soldering 5. Adjustment area of the extension height 6. Tip style 7. Contact pressure 8. Tip plating 9. Tip diameter


Tip style · Diameter · Plating

				
A	C	C	CL	C1
2.30 Au	1.80 Au	2.30 Au 3.00 Au 4.00 Au	2.30 Au	1.00 Au


				
CL1	CL2	CL3	D6	F
1.00 Au	1.80 Au	1.00 Au	1.00 Au	1.80 Au

			
F	F1	FL3	H2
2.00 Au 2.30 Au	2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK	1.00 Au	2.60 Au

3010/2GW

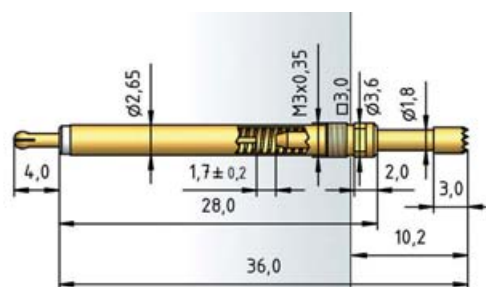


H 3010/GW

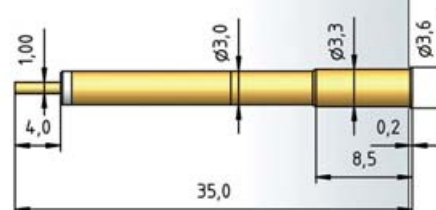


3010/2GW5



H 3010/GW5



H 3010/GWR5

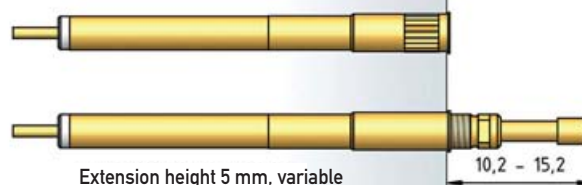

Series 3010/2GW(5)

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Switching travel 4.0 mm
- Soldering temperature max. 300°C
- Variable extension height (optional)

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N
Spring force at switching travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3010/GW H3010/GW5

HP 2361.1 (Trolitax)	3.28 mm
HGW 2372	3.29 mm

H3010/GWR5

HP 2361.1 (Trolitax)	3.31 mm
HGW 2372	3.32 mm

How to order:

3010/2GW 5 - C - 1.3 N - Au - 2.3/SH4.0


1 2 3 4 5 6 7 8 9 10

1. Series 2. Collar height 3. Threaded design 4. Interchangeable without soldering 5. Adjustment area of the extension height 6. Tip style 7. Contact pressure 8. Tip plating 9. Tip diameter 10. Switching travel


Tip style · Diameter · Plating



A	C	C	CL	C1
2.30 Au	1.80 Au	2.30 Au 3.00 Au 4.00 Au	2.30 Au	1.00 Au




CL1	CL2	CL3	D6	F
1.00 Au	1.80 Au	1.00 Au	1.00 Au	1.80 Au




F	F1	FL3	H2
2.00 Au 2.30 Au	2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK	1.00 Au	2.60 Au

3010/2GW

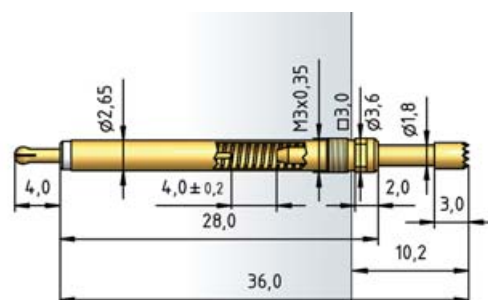


H 3010/GW

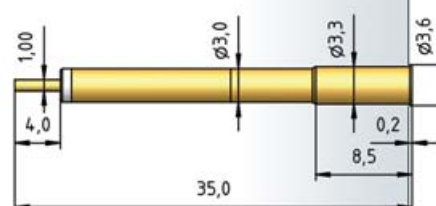

3010/2GW5



H 3010/GW5



H 3010/GWR5



Extension height 5 mm, variable

Series 3011/2GS

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Switching travel 1.7 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/ 5.00/4.00 N
Spring force at working travel	0.75/1.25/1.80/2.30/ 3.50/6.50/7.00/8.50/ 9.00/9.50/10.00/ 12.50/13.00 N
Spring force at switching travel	0.20/0.45/0.75/1.00/ 1.60/3.60/3.60/4.40/ 4.80/5.40/5.20/8.00/ 7.60 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3011/GWR5, H3011/R H3011/RK

HP 2361.1 (Trolitax)	3.02 mm
HGW 2372	3.04 mm

H3011/K



HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.02 mm




How to order:



3011/2GS - C - 1.8 N - Au - 2.3
1 2 3 4 5 6 7 8

1. Series 2. Collar height 3. Threaded design 4. Plug-in connector 5. Tip style
 6. Contact pressure 7. Tip plating 8. Tip diameter


Tip style · Diameter · Plating

				
A	C	C	CL	C1
2.30 Au	1.80 Au	2.30 Au 3.00 Au 4.00 Au	2.30 Au	1.00 Au


				
CL1	CL2	CL3	D6	F
1.00 Au	1.80 Au	1.00 Au	1.00 Au	1.80 Au

			
F	F1	FL3	H2
2.00 Au 2.30 Au	2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK	1.00 Au	2.60 Au

3011/2GS

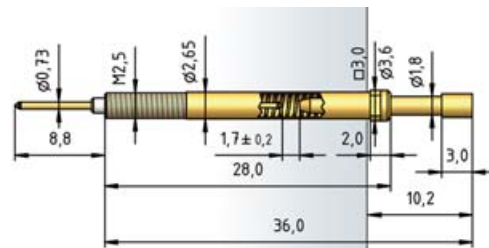

H 3011/GWR5

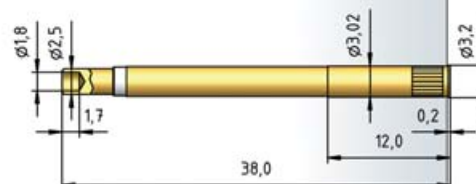


H 3011/R



H 3011/K




H 3011/RK



H 3010/5K



HI 3011

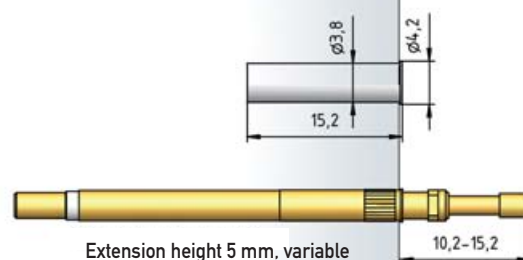

Series 3011/2GS

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Switching travel 4.0 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N
Spring force at switching travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3011/GWR5, H3011/R, H3011/RK

HP 2361.1 (Trolitax)	3.02 mm
HGW 2372	3.04 mm

H3011/K

HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.02 mm

How to order:




3011/2GS - C - 1.8 N - Au - 2.3/SH4.0


1 2 3 4 5 6 7 8 9

1. Series 2. Collar height 3. Threaded design 4. Plug-in connector
5. Tip style 6. Contact pressure 7. Tip plating 8. Tip diameter
9. Switching travel


Tip style · Diameter · Plating

				
A	C	C	CL	C1
2.30 Au	1.80 Au	2.30 Au 3.00 Au 4.00 Au	2.30 Au	1.00 Au


				
CL1	CL2	CL3	D6	F
1.00 Au	1.80 Au	1.00 Au	1.00 Au	1.80 Au

			
F	F1	FL3	H2
2.00 Au 2.30 Au	2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK	1.00 Au	2.60 Au

3011/2GS

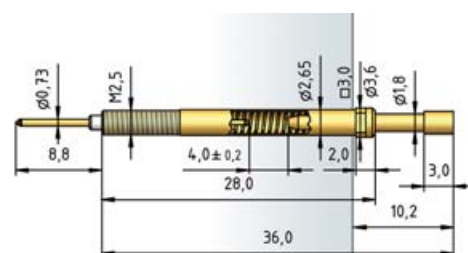

H 3011/GWR5

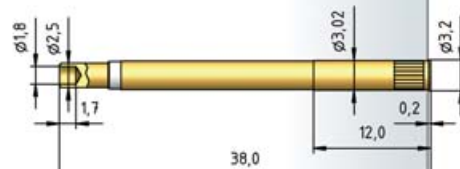


H 3011/R



H 3011/K




H 3011/RK



H 3010/5K



HI 3011

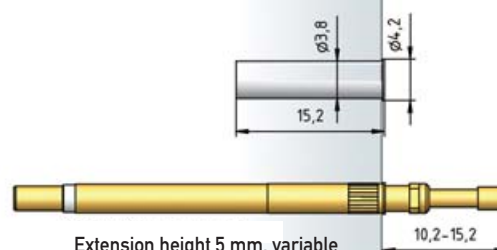

Extension height 5 mm. variable

Series 3012/2GS

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Version for large tip diameter
- Switching travel 1.7 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	4.20 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.75/1.25/1.80/2.30/ 3.50/6.50/7.00/8.50/ 9.00/9.50/10.00/ 12.50/13.00 N
Spring force at switching travel	0.20/0.45/0.75/1.00/ 1.60/3.60/3.60/4.40/ 4.80/5.40/5.20/8.00/ 7.60 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3011/GWR5, H3011/R, H3011/RK

HP 2361.1 (Trolitax)	3.02 mm
HGW 2372	3.04 mm

H3011/K

HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.02 mm

How to order:

3012/2GS - F - 1.8N - Au - 3.0C

1 2 3 4 5 6 7 8 9

1. Series 2. Collar height 3. Threaded design 4. Plug-in connector
5. Tip style 6. Contact pressure 7. Tip plating 8. Tip diameter
9. Tip material (only for CuBe)

Tip style · Diameter · Plating




C	CK	CL	C5	F
3.00C Au	2.27C Au	2.30C Au	1.00 Au	3.00C Au
4.00C Au		3.00C Au		3.50C Au
				4.00C Au
				4.50C Au
				5.00C Au
				5.50C Au
				5.90C Au



FL	F1	FL1
3.00C Au	2.30C HTK	3.00C HTK
3.50C Au	3.00C HTK	3.50C HTK
4.00C Au	3.50C HTK	
4.50C Au	4.00C HTK	
	4.50C HTK	
	5.00C HTK	
	5.50C HTK	
	5.90C HTK	

3012/2GS

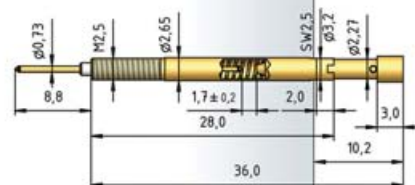

3012/2GS-L



3012/2GS-CK




H 3011/GWR5




H 3011/R



H 3011/K




H 3011/RK



H 3010/5K



HI 3011

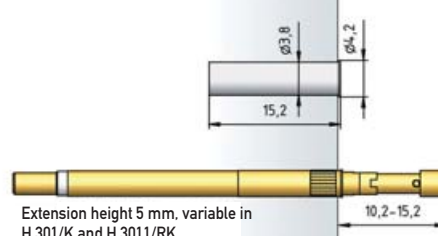

Extension height 5 mm, variable in
H 301/K and H 3011/RK

Series 3012/2GS

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Version for large tip diameter
- Switching travel 4.0 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	4.20 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N
Spring force at switching travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3011/GWR5, H3011/R, H3011/RK

HP 2361.1 (Trolitax)	3.02 mm
HGW 2372	3.04 mm

H3011/K

HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.02 mm

How to order:

3012/2GS - F - 1.8 N - Au - 3.0C/SH4.0

1 2 3 4 5 6 7 8 9 10

1. Series 2. Collar height 3. Threaded design 4. Plug-in connector
5. Tip style 6. Contact pressure 7. Tip plating 8. Tip diameter
9. Tip material (only for CuBe) 10. Switching travel

Tip style · Diameter · Plating




C	CK	CL	C5	F
3.00C Au 4.00C Au	2.27C Au	2.30C Au 3.00C Au	1.00 Au	3.00C Au 3.50C Au 4.00C Au 4.50C Au 5.00C Au 5.50C Au 5.90C Au



FL	F1	FL1
3.00C Au 3.50C Au 4.00C Au 4.50C Au	2.30C HTK 3.00C HTK 3.50C HTK 4.00C HTK 4.50C HTK 5.00C HTK 5.50C HTK 5.90C HTK	3.00C HTK 3.50C HTK

3012/2GS

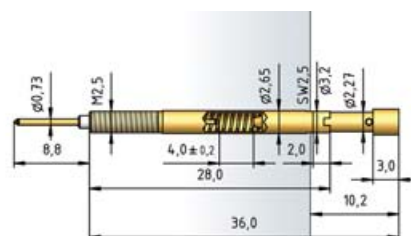

3012/2GS-L



3012/2GS-CK




H 3011/GWR5




H 3011/R



H 3011/K




H 3011/RK



H 3010/5K



HI 3011



Extension height 5 mm, variable in
H 301/K and H 3011/RK

Series 3012/2GS-FS1

• FLS1

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Version for large tip diameter
- Tips insulated
- Switching travel 1.7 mm
- Soldering temperature max. 300°C
- Variable extension height

Mechanical Data

Center	4.00 mm/160 mil
Full travel	4.50 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.75/1.25/1.80/2.30/ 3.50/6.50/7.00/8.50/ 9.00/9.50/10.00/ 12.50/13.00 N
Spring force at switching travel	0.20/0.45/0.75/1.00/ 1.60/3.60/3.60/4.40/ 4.80/5.40/5.20/ 8.00/7.60 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Tip	CuBe, passivated
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3011/GWR5, H3011/R, H3011/RK

HP 2361.1 (Trolitax)	3.02 mm
HGW 2372	3.04 mm

H3011/K

HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.02 mm

How to order:

3012 / 2 G S - FS1 - 3.0 N - CB - 3.0 C
1 2 3 4 5 6 7 8 9


1. Series 2. Collar height 3. Threaded design 4. Plug-in connector
 5. Tip style 6. Contact pressure 7. Tip plating 8. Tip diameter
 9. Tip material (only for CuBe)

Tip style · Diameter · Plating



FS1	FLS1
3.00C 3.50C	3.00C Au
4.00C 4.50C	3.50C Au
5.00C 5.50C	4.50C Au
5.90C	5.00C Au


3012/2GS-FS1

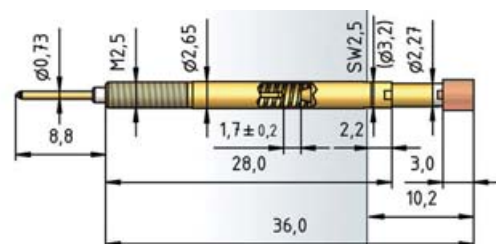

3012/2GS-FLS1




H 3011/GWR5

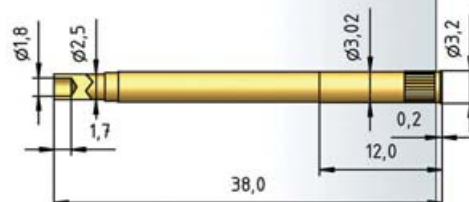

H 3011/R



H 3011/K




H 3011/RK



H 3011/5K



HI 3011

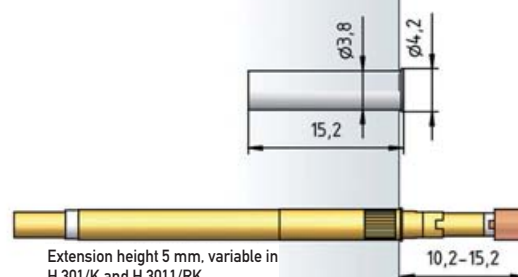

Extension height 5 mm, variable in
H 3011/K and H 3011/RK

Series 3012/2GS-FS1

• FLS1

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Version for large tip diameter
- Tips insulated
- Switching travel 4.0 mm
- Soldering temperature max. 300°C
- Variable extension height

Mechanical Data

Center	4.00 mm/160 mil
Full travel	4.50 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.12/0.25/0.30/0.40/ 0.60/1.80/1.40/1.70/ 2.00/2.70/2.00/5.00/ 4.00 N
Spring force at working travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N
Spring force at switching travel	0.25/0.75/1.30/1.80/ 3.00/6.00/6.50/8.00/ 8.50/9.00/9.50/12.00/ 12.50 N

Electrical Data

Receptacle - plunger

Max. current rating	5.0 A
Typical continuity resistance	<= 15 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Tip	CuBe, passivated
Receptacle	Brass, gold-plated

Recommended diameter of drill

H3011/GWR5, H3011/R, H3011/RK

HP 2361.1 (Trolitax)	3.02 mm
HGW 2372	3.04 mm

H3011/K

HP 2361.1 (Trolitax)	3.01 mm
HGW 2372	3.02 mm

How to order:

3012/2GS - FS1 - 3.0N - CB - 3.0C/SH4.0

1 2 3 4 5 6 7 8 9 10


1. Series 2. Collar height 3. Threaded design 4. Plug-in connector
5. Tip style 6. Contact pressure 7. Tip plating 8. Tip diameter
9. Tip material (only for CuBe) 10. Switching travel

Tip style · Diameter · Plating



FS1	FLS1
3.00C 3.50C	3.00C Au
4.00C 4.50C	3.50C Au
5.00C 5.50C	4.50C Au
5.90C	5.00C Au


3012/2GS-FS1

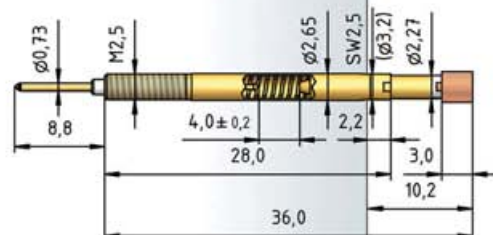

3012/2GS-FLS1



H 3011/GWR5

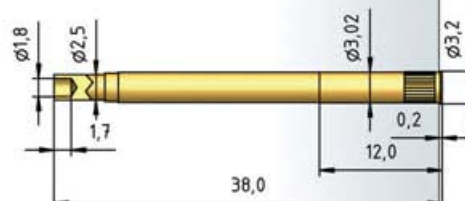

H 3011/R



H 3011/K




H 3011/RK



H 3011/5K



HI 3011



Extension height 5 mm. variable in
H 3011/K and H 3011/RK

Series 3014/2G

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Short design (24.5 mm)
- Soldering temperature max. 300°C

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.70 mm
Pre-loaded spring force	0.50 N
Spring force at working travel	1.50 N
Spring force at switching travel	0.90 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 40 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe/CuBe with plastic
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.50 mm
HGW 2372	3.51 mm

Tip style · Diameter · Plating


				
A	C	C	F	F
3.00C Au	1.00C Au	2.00C Au 3.00C Au	1.00C Au	2.00C Au 3.00C Au




F1

2.00C HTK
3.00C HTK


3014/2G

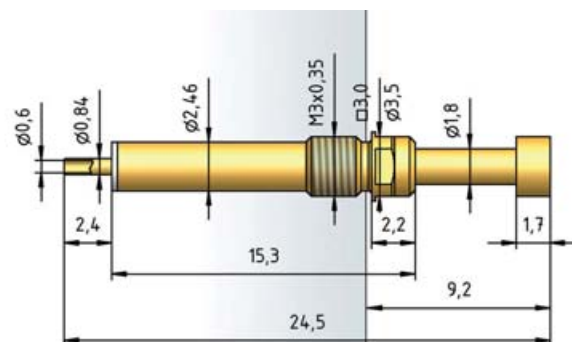

H 3014/GR



H 3014/GWR

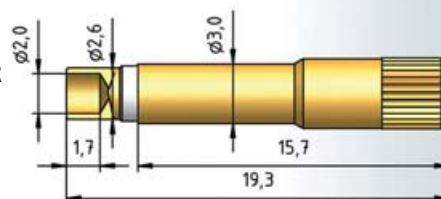

How to order:

3014/2G - A - 1.5 N - Au - 3.0C

1 2 3 4 5 6 7 8

1. Series 2. Collar height 3. Threaded design 4. Tip style 5. Contact pressure
6. Tip plating 7. Tip diameter 8. Tip material (only for CuBe)

Series 3020/2GW5

- Switching test probe for the cable harness test
- Threaded type
- Switching travel 2.6 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Switching travel	2.60 mm
Pre-loaded spring force	0.15/0.40/0.50/1.70 N
Spring force at working travel	0.80/1.50/3.00/6.50 N
Spring force at switching travel	0.25/0.80/1.80/4.50 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	2.15 mm
HGW 2372	2.16 mm

Tip style · Diameter · Plating


				
A	C	C3	F	F
1.50 Au	1.30 Au 1.50 Au 3.00 Au	1.50 Au	0.80 Au	1.00 Au 1.30 Au 1.50 Au



F1

1.50 HTK


3020/2GW5

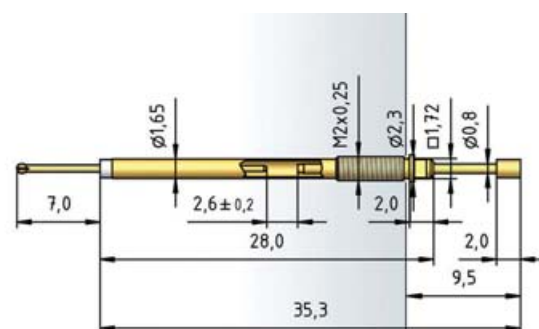


3020/2GW5-C3



H 3020/GW5

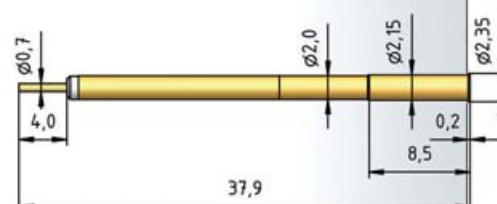

H 3020/GWR5

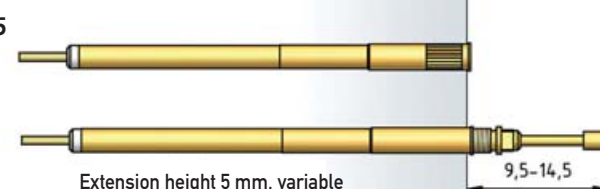

Extension height 5 mm. variable

How to order:

3020/2GW5 - F - 1.5 N - Au - 1.5

1 2 3 4 5 6 7 8 9

1. Series 2. Collar height 3. Threaded design 4. Interchangeable without soldering 5. Adjustment area of the extension height 6. Tip style 7. Contact pressure 8. Tip plating 9. Tip diameter

Series 3020/2GW5

- Switching test probe for the cable harness test
- Threaded type
- Switching travel 4.0 mm
- Soldering temperature max. 300°C

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.15/0.40/0.50/1.70 N
Spring force at working travel	0.30/1.00/2.50/6.00 N
Spring force at switching travel	0.30/1.00/2.50/6.00 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	2.15 mm
HGW 2372	2.16 mm

How to order:

3020/2GW 5 - F - 1.5 N - Au - 1.5

1. Series 2. Collar height 3. Threaded design 4. Interchangeable without soldering 5. Adjustment area of the extension height 6. Tip style 7. Contact pressure 8. Tip plating 9. Tip diameter

Tip style · Diameter · Plating


				
A	C	C3	F	F
1.50 Au	1.30 Au 1.50 Au 3.00 Au	1.50 Au	0.80 Au	1.00 Au 1.30 Au 1.50 Au



F1

1.50 HTK


3020/2GW5

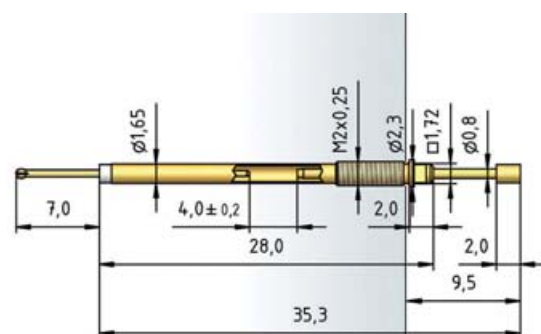

3020/2GW5-C3



H 3020/GW5

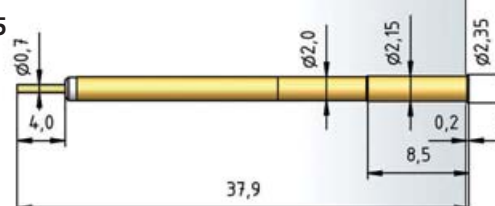

H 3020/GWR5



Series 3023/2GS

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Soldering temperature max. 300°C

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	1.50 mm
Pre-loaded spring force	0.12/0.30/0.40/ 0.80/0.80/0.80 N
Spring force at working travel	0.85/1.35/2.00/ 3.00/3.50/6.50 N
Spring force at switching travel	0.20/0.50/0.80/ 1.45/1.60/3.10 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated, or gold-plated with insulator
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.01 mm

How to order:

3023/2GS - F - 3.5 N - Au - 1.8

1 2 3 4 5 6 7 8

1. Series 2. Collar height 3. Threaded design 4. Plug-in connector 5. Tip style
6. Contact pressure 7. Tip plating 8. Tip diameter

Tip style · Diameter · Plating




A	C	CL	D	DL
1.80 Au	1.30 Au 1.50 Au 1.80 Au 2.00 Au 2.30 Au	1.00 Au 1.40 Au 1.80 Au	1.00 Au	1.00 Au



D1	F	F	F1	FL
0.64 Au	0.70 Au 1.00 Au	1.80 Au	1.80 2.30	1.00 Au


3023/2GS

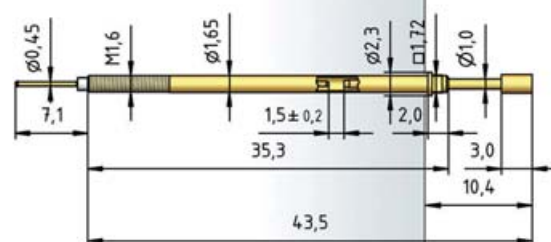


3023/2GS-CL



H 3023/GWR5

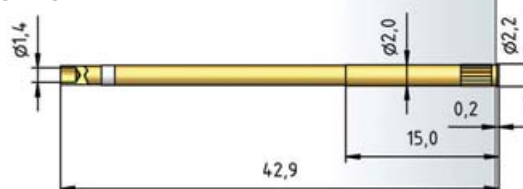



H 3023/G



H 3023/5G



HI 3023



Extension height 5 mm, variable

Series 3024/2G

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Short design (24.5 mm)
- Soldering temperature max. 300°C
- FS1 insulated metal cap

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	2.60 mm
Pre-loaded spring force	0.30/0.50/0.50 N
Spring force at working travel	1.35/2.00/2.50 N
Spring force at switching travel	1.00/1.50/1.80 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated or with insulator
Receptacle	Brass, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	2.15 mm
HGW 2372	2.16 mm


Tip style · Diameter · Plating

				
C	D	F	F1	FS1
1.80C Au	1.00C Au	1.00C Au	1.80 HTK	2.00C Ni/S


3024/2G

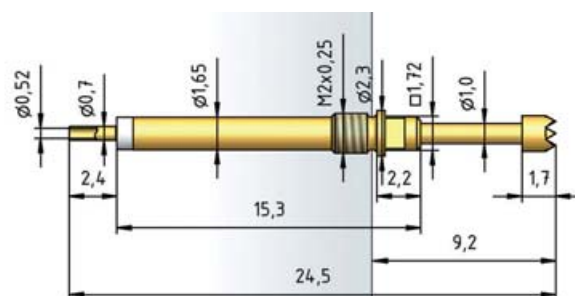

H 3024/G



H 3024/GW

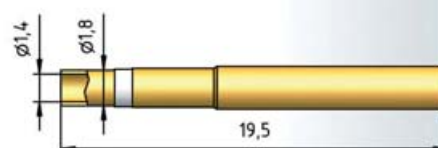

How to order:

3024/2G - C - 2.0 N - Au - 1.8 C
 1 2 3 4 5 6 7 8

1. Series 2. Collar height 3. Threaded design 4. Tip style 5. Contact pressure
 6. Tip plating 7. Tip diameter 8. Tip material (only for CuBe)

Series 3030/GW3

- Switching test probe for the cable harness test
- Threaded type
- Easy-replacement system
- Replacement without soldering
- Receptacle diameter only 2.00 mm

Mechanical Data

Center	2.54 mm/100 mil
Full travel	6.30 mm
Working travel	5.00 mm
Switching travel	4.00 mm
Pre-loaded spring force	0.30 N
Spring force at working travel	2.00 N
Spring force at switching travel	1.00 N

Electrical Data

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<=50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.65 mm
With pressed-in ring	1.75 mm
HGW 2372	1.67 mm
With pressed-in ring	1.76 mm

Tip style · Diameter · Plating




C	D	D1	DL	F
1.00 Au 1.30 Au	0.65 Au	0.65 Au	0.65 Au	1.00 Au




FL

0.70 Au


3030/GW3

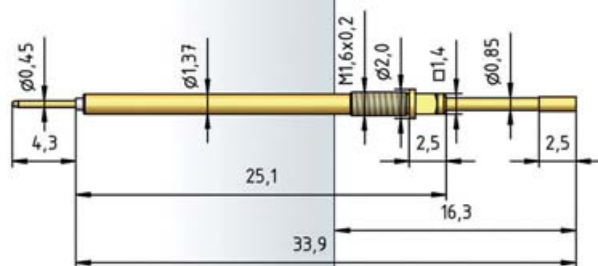

3030/GW3...-L

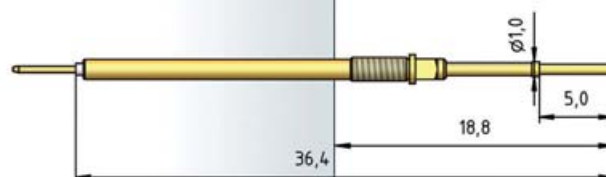

H 3030/GW3

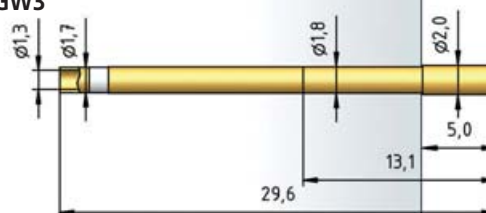

How to order:

3030/ GW 3 - F - 1.5 N - Au - 1.0

1. Series 2. Threaded design 3. Interchangeable without soldering 4. Adjustment area of the extension height 5. Tip style 6. Contact pressure 7. Tip plating 8. Tip diameter

Series 3015/G

- Ball-head switching test probe for presence detection with side activation
- Threaded type
- Precision ball plunger guide

Tip style · Diameter · Plating



D

4.00 Ni

Mechanical Data

Center	7.5 mm/300 mil
Full travel	1.00 mm
Working travel	0.80 mm
Switching travel	0.50 mm
Pre-loaded spring force	0.20 N
Spring force at working travel	0.70 N
Spring force at switching travel	0.60 N

Electrical Data

Max. current rating	1.0 A
Typical continuity resistance	<= 25 mOhm
Typical insulating voltage	1000 V


Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, nickel plated
Receptacle	Brass, gold-plated


Recommended diameter of drill

HP 2361.1 (Trolitax)	6.75...6.80 mm
----------------------	----------------

3015/G

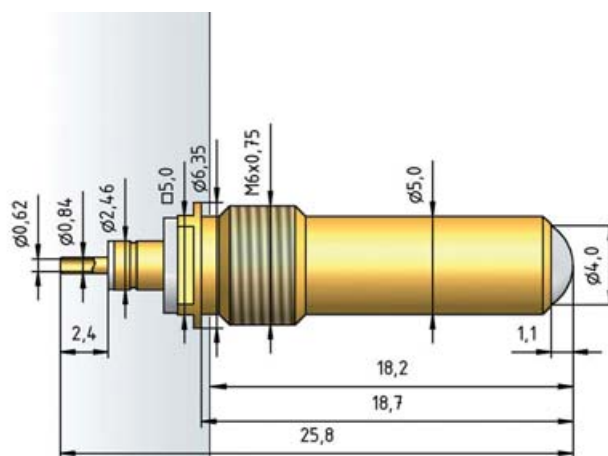

H 3015/GR

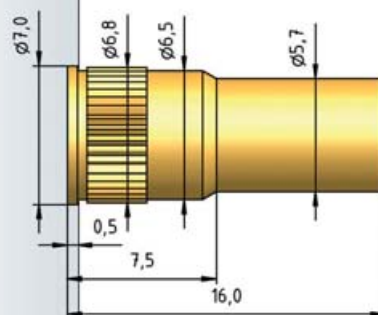

How to order:

3015/G - D - 0.7 N - Ni - 4.0
 1 2 3 4 5 6

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
 6. Tip diameter

Series	Center
5087	4.00 mm
5104	4.00 mm
5265	3.00 mm
5203	2.54 mm
3028.01	2.54 mm

Push-back test probes

Push-back test probes are used for the contacting of connectors when a "catch test" is necessary. In this case, a defined force is applied to the stop parts in order to check correct seating inside the connector or to check that the connector is locked in position. All types are designed as switching test probes. Stop parts which are not locked in position are pushed out by the pressure from the connector, and the push-back test probe does not switch or give a signal.

Push-back test probes are available for centers of 4.0 mm and 2.54 mm and with contact pressures of up to 25 N. Series 5104, 5265 and 3028 are especially effective for these uses. Their modular design gives them a wide range of applications. Of course, solder-free replacement of the test probes is an integral part of the easy-replacement system.



Series 5087

- Push-back test probe for the cable harness test
- Suitable when standard tip styles are used

Mechanical Data

Center	4.00 mm/160 mil
Full travel	10.00 mm
Working travel	9.50 mm
Switching travel	7.50 mm
Pre-loaded spring force	1.50/2.00/4.00 N
Spring force at working travel	6.00/9.00/15.00 N
Spring force at switching travel	4.30/6.80/12.00 N

Mechanical Data • „L“

Center	4.00 mm/160 mil
Full travel	6.00 mm
Working travel	5.00 mm
Switching travel	3.00 mm
Pre-loaded spring force	3.00/6.00/10.50 N
Spring force at working travel	9.00/15.00/20.00 N
Spring force at switching travel	6.60/10.80/16.20 N

Electrical Data

Barrel - tip

Max. current rating	20.0 A
Typical continuity resistance	<=3 mOhm

Connector pin - tip

Max. current rating	1.0 A
Typical continuity resistance	<=25 mOhm
Typical insulating voltage	1000V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel/CuBe

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.00 mm
----------------------	---------

(Tolerances dependent on carrier material, test drilling is recommended)

Connector pin Ø X/mm	Connector pin length Y/mm
0,5	6,0
1,0	2,5
1,0	4,0

How to order:

5087 - F - 15.0 N - Au - 1.8 C/1.0x4.0

1 2 3 4 5 6 7 8

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe) 7. Connector pin diameter 8. Connector pin length

Tip style · Diameter · Plating




C	D	D5	F	F5
2.30C Au	1.45C Au	1.80C Au	1.00C Au	1.80C Au
2.80C Au		2.30C Au	1.10C Au	2.30C Au
3.00C Au		3.00C Au	1.40C Au	
4.00C Au				




F	FL
1.80C Au	1.30C Au
	1.80C Au

5087

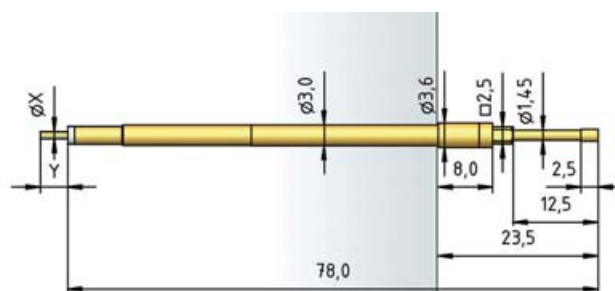

5087-FL

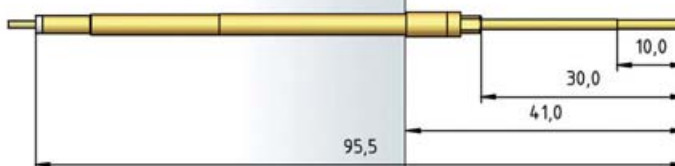

5087-D5/F5



Series 5104

- Push-back test probe for the cable harness test
- Especially suitable for spade-shaped tip style
- Non-rotating
- Receptacle with switch function

Mechanical Data

Center	4.00 mm/160 mil
Full travel	7.00 mm
Working travel	5.00 mm
Switching travel	3.50 mm
Pre-loaded spring force	0.50/1.50/4.00/ 3.00/5.00/4.00/ 9.00 N
Spring force at working travel	1.50/6.75/12.00/ 15.75/20.75/25.75/ 30.75 N
Spring force at switching travel	0.70/4.65/9.10/ 11.40/15.50/18.70/ 23.70 N
Without switching element	0.75/6.00/11.25/ 15.00/20.00/25.00/ 30.00 N

Electrical Data

Barrel - tip

Max. current rating	20.0 A
Typical continuity resistance	<=3 mOhm

Connector pin - tip

Max. current rating	1.0 A
Typical continuity resistance	<=30 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	3.50 mm
----------------------	---------

(Tolerances dependent on carrier material, test drilling is recommended)

Connector pin Ø X/mm	Connector pin length Y/mm
0,5	6,0
0,7	7,0
1,0	2,5
1,0	4,0

How to order:


5104 - Y - 15.75 N - Au - 2.2x1.6/1.0x4.0
 1 2 3 4 5 6 7 8

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip thickness 7. Connector pin diameter 8. Connector pin length


Tip style · Diameter · Plating




A	C	D	F	F
2.50 Au 3.00 Au 4.00 Au	2.40 Au 3.00 Au 4.00 Au 4.80 Au	1.75 Au 1.80 Au 2.00 Au 2.30 Au 3.00 Au 3.70 Au	1.40 Au 1.80 Au 2.00 Au 3.00 Au	4.00 Au




Y	Y	Y	Y	Y
2.00 x 0.80 Au	2.20 x 1.30 Au	2.20 x 1.60 Au	2.25 x 1.40 Au	2.25 x 1.80 Au



Y	Y	Y	Y	Y1
2.50 x 0.60 Au	2.50 x 0.80 Au	3.00 x 1.60 Au	3.20 x 0.50 Au	3.00 x 0.80 Au




Y1	Y2	Y4	Y21R	Y95
3.00 x 1.60 Au	2.50 x 0.80 Au	2.90 x 0.74 Au	2.50 x 0.80 Au	3.00 x 1.80 Au




Y95
5.50 x 1.80 Au


5104

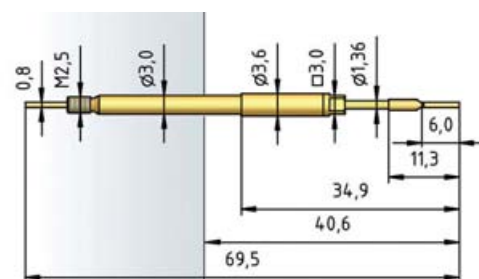

H 5104



5104/SE

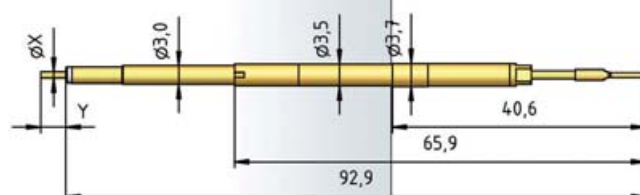

H 5104/SE



Series 5265

- Push-back test probe for the cable harness test
- Especially suitable for spade-shaped tip style
- Non-rotating
- Receptacle with switch function

Mechanical Data

Center	3.00 mm/118 mil
Full travel	5.50 mm
Working travel	5.00 mm
Switching travel	2.60 mm
Pre-loaded spring force	3.00 N
Spring force at working travel	16.0 N
Spring force at switching travel	9.20 N
Without switching element	15.0 N

Electrical Data

Barrel - tip

Max. current rating	8.0 A
Typical continuity resistance	<= 30 mOhm

Connector pin - tip

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.49...2.51 mm
----------------------	----------------

(Tolerances dependent on carrier material, test drilling is recommended)


Tip style · Diameter · Plating

C	F	Y	Y	Y
2.00 Au 2.70 Au 3.00 Au	1.80 Au	1.90 x 0.50 Au	1.90 x 0.80 Au	2.20 x 1.20 Au
Y	Y	Y	Y	YL
2.50 x 0.50 Au	2.50 x 0.80 Au	2.50 x 1.50 Au	2.70 x 0.80 Au	4.00 x 0.60 Au


5265

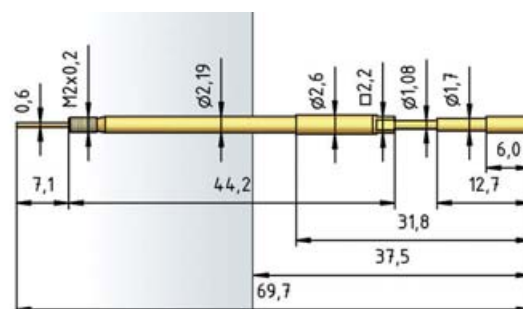


5265-YL

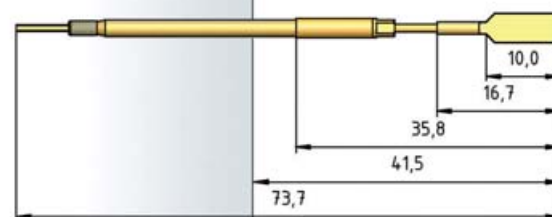

H 5265



H 5265 SEV

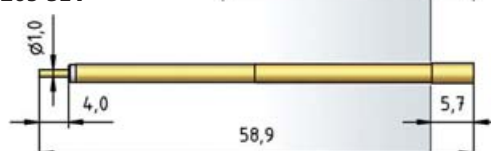

How to order:

5265 - Y - 15.0 N - Au - 1.9x0.8

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip thickness

Series 5203






- Push-back test probe for the cable harness test
- Especially suitable for spade-shaped tip style
- Non-rotating
- Receptacle with switch function

Mechanical Data	
Center	2.54 mm/100 mil
Full travel	5.50 mm
Working travel	5.00 mm
Pre-loaded spring force	1.20/1.20 N
Spring force at working travel	10.00/15.00 N


Electrical Data	
Max. current rating	5.0 A
Typical continuity resistance	<=30 mOhm

Materials	
Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill	
HP 2361.1 (Trolitax)	2.20 mm
(Tolerances dependent on carrier material, test drilling is recommended)	

Tip style · Diameter · Plating				
				
A	D	F	Y	Y
1.90C Au 2.20C Au	1.20C Au 2.50C Au	1.50C Au 1.80C Au	1.90 x 0.30 Au	1.90 x 0.36C Au
				
Y	Y	Y		
1.90 x 0.50 Au	1.90 x 0.80 Au	2.50 x 0.80 Au		

How to order:						
5203	-	Y	-	10.0 N	-	Au - 1.9x0.3 C
1	2	3	4	5	6	7
1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip thickness 7. Tip material (only for CuBe)						

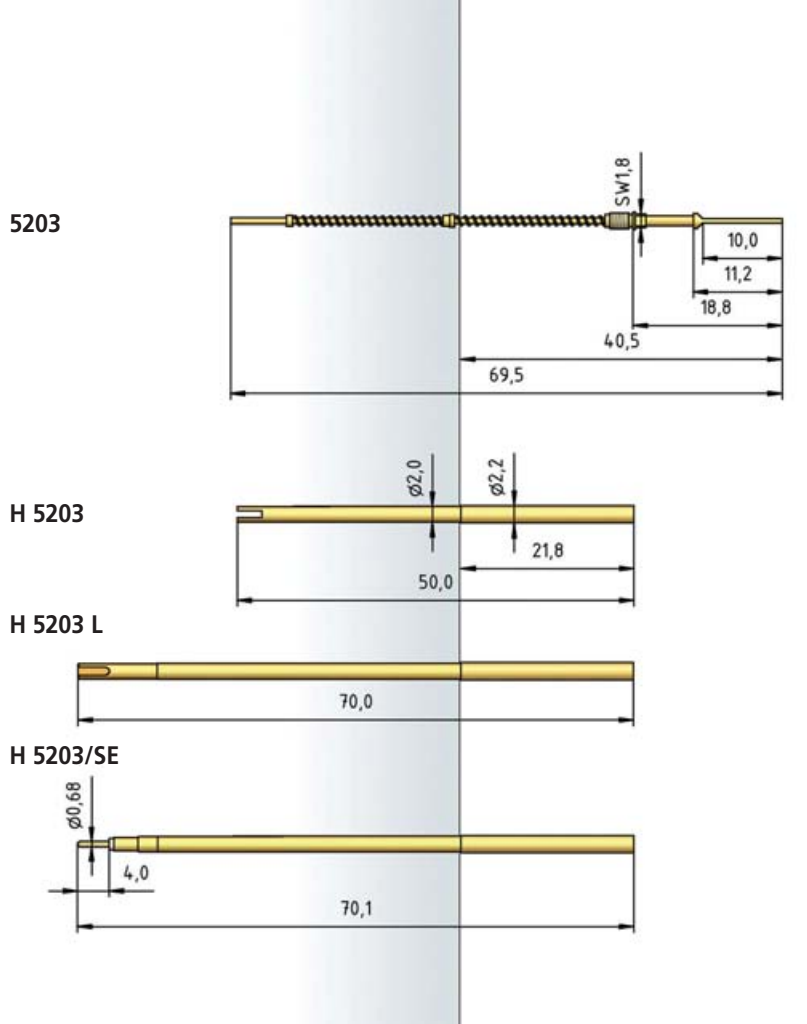

Series 3028.01

- Push-back test probe for the cable harness test
- Especially suitable for spade-shaped tip style
- Non-rotating
- Receptacle can be extended with switching element (optional)
- Soldering temperature max. 300°C

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.00 mm
Working travel	4.00 mm
Switching travel	2.60 mm
Pre-loaded spring force	1.00/2.20/4.00 N
Spring force at working travel	5.00/10.00/15.00 N
Spring force at switching travel	3.10/6.80/10.70 N

Electrical Data

Receptacle - plunger

Max. current rating	3.0 A
Typical continuity resistance	<= 20 mOhm

Pin - plunger

Max. current rating	1.0 A
Typical continuity resistance	<= 50 mOhm
Typical insulating voltage	1000 V

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	2.10 mm
HGW 2372	2.11 mm

How to order:


3028.01 - Y - 15.0 N - Au - 1.5x 0.5

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter 7. Tip thickness

Tip style · Diameter · Plating




A	D2	F	Y	Y3
1.50 Au 2.00 Au	0.80 Au	1.30 Au	1.50 x 0.50 Au	1.50 x 0.50 Au




Y8

3.50 x 0.50 Au


3028.01

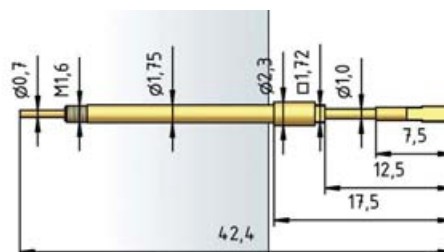


3028.01-D2

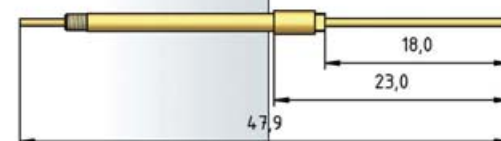

H 3028/R.01



SE 3028.01



3028.01+H+SE



Series	Center
1021 • 1021/G	2.54 mm
1060 • 1060/G	4.00 mm
1075 • 1075/G	4.50 mm

High-current test probes

High-current test probes are used when higher currents are involved. Thanks to their compact design, these series are available for centers of 2.54 mm to 5.0 mm with a large number of different tip styles. Alternatively, all series are available in a threaded type which ensures an excellent fit in the receptacle. Based on PTR's standard sizes, the high-current types are fitted with a split plunger. During contacting, both parts of the plunger are pressed against each other and, as a result, against the barrel wall. The resulting increased contact with the barrel wall and the overall greater contact surface mean that the test probe can be subjected to higher currents, depending on the series, of 16 A to 50 A.



Series 1021 • 1021/G

- For use in burn-in and run-in test
- Transmission of high currents
- Low contact resistance

Mechanical Data

Center	2.54 mm/100 mil
Full travel	5.30 mm
Working travel	4.00 mm
Pre-loaded spring force	0.70 N
Spring force at working travel	3.00 N

Electrical Data

Max. current rating	16.0 A
Typical continuity resistance	<=10 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated/ Silver cap
Receptacle	Brass, gold-plated

Recommended diameter of drill

H1021 L

HP 2361.1 (Trolitax)	1.98...2.00 mm
HGW 2372	1.98...2.01 mm


H1021/GR-L

HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.03 mm


Tip style · Diameter · Plating

				
AX	A6X	BX	CX	DX
2.00C Au	2.00C Au	1.00C Au	1.30C Au 1.80C Au 2.00C Au 3.00C Au	0.80C Au 1.00C Au
				
D3X	EX	FX	HX	KX
2.00C Ag	1.80C Au	1.00C Au	1.10C Au 1.40C Au 1.70C Au	1.25C Au 1.75C Au


1021-...x

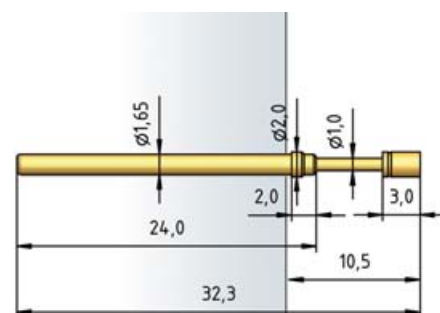


H 1021 L

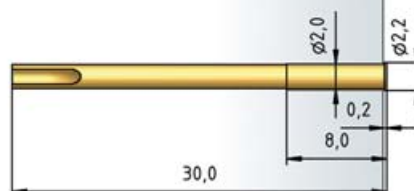


1021/G-...x

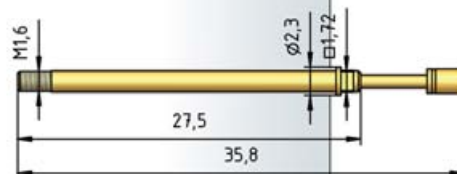

H 1021/GR-L

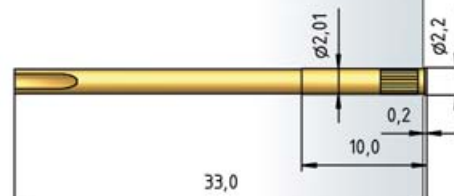

H 1021/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1021/G - CX - 3.0 N - Au - 2.0 C

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1060 • 1060/G

- For use in burn-in and run-in test
- Transmission of high currents
- Low contact resistance

Mechanical Data

Center	4.00 mm/160 mil
Full travel	5.50 mm
Working travel	4.40 mm
Pre-loaded spring force	0.80 N
Spring force at working travel	3.00 N

Electrical Data

Max. current rating	24.0 A
Typical continuity resistance	<=5 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated/ Silver cap
Receptacle	Brass, gold-plated

Recommended diameter of drill

H1050 L, H1060/G-L

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.00 mm


H1060/GRV-L

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm


Tip style · Diameter · Plating

				
AX	A6X	BAX	CX	DX
3.00C Au	3.00C Au	1.80C Au	2.30C Au 3.00C Au 4.00C Au	2.30C Au 3.00C Au
				
DX	DX1	D3X	FX	GX
1.00C Au 1.40C Au	3.00C Au	3.00C Ag	2.30C Au 4.00C Au 6.00C Au	2.50C Au
				
HX	H1X	KX	AOX	
1.80C Au	1.30C Au	3.00C Au	3.20C Au	


1060-...x

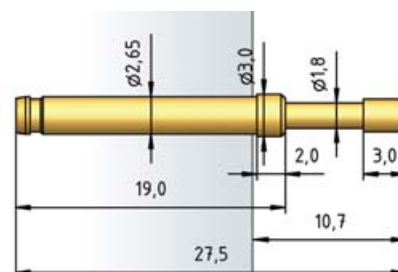


H 1050 L

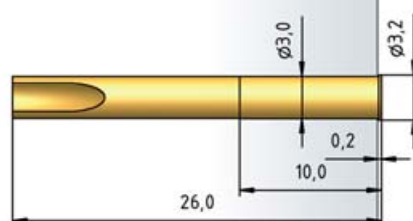

1060/G-...x

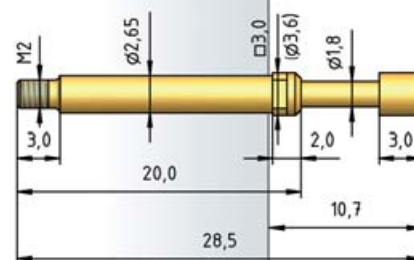

H 1060/G-L

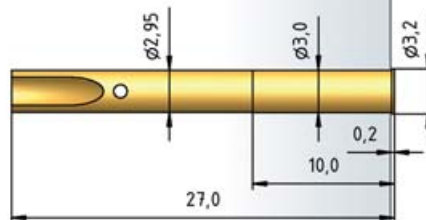

H 1060/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on. Important: If too much solder is used, there is a risk that it will get into the thread.

How to order:

1060/G - FX - 3.0 N - Au - 4.0 C
1 2 3 4 5 6 7

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series 1075 • 1075/G

- For use in burn-in and run-in test
- Transmission of high currents
- Low contact resistance

Mechanical Data

Center	4.50 mm/177 mil
Full travel	5.50 mm
Working travel	4.40 mm
Pre-loaded spring force	1.50/1.50 N
Spring force at working travel	3.00/5.00 N

Electrical Data

Max. current rating	50.0 A
Typical continuity resistance	<=5 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, silver-plated
Plunger	CuBe, gold-plated/ Silver cap
Receptacle	Brass, gold-plated

Recommended diameter of drill

With receptacle


HP 2361.1 (Trolitax)	3.98...3.99 mm
HGW 2372	3.49...3.50 mm

Tip style · Diameter · Plating


				
AX	A6X	CLX	CX	DNX
4.00C Au	3.00C Au	4.00C Au	3.00C Au 4.00C Au	4.00C Au

	
FX	KX
4.00C Au	3.00C Au


1075-...x

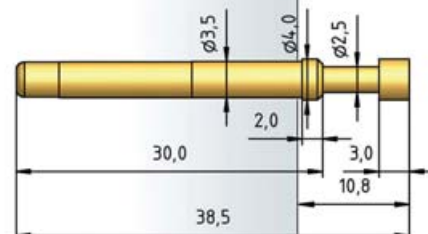


H 1075 L

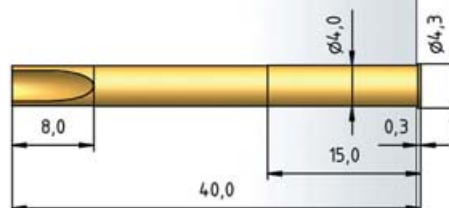

1075/G-...x

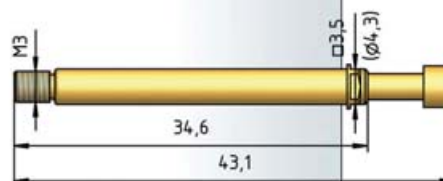

H 1075/G-L



How to order:

1075/G - FX - 3.0 N - Au - 4.0 C
1 2 3 4 5 6 7

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating 6. Tip diameter 7. Tip material (only for CuBe)

Series	Center
4004/G	4.00 mm
4004	4.00 mm
4005	3.50 mm
4006	3.00 mm
4034	2.54 mm

Pneumatic test probes

Pneumatic test probes are operated with compressed air. The plunger presses against the test piece at an operating pressure of 6 bar applied to the test probe via a pneumatic hose. Depending on the size, the maximum contact pressure is up to 1.5 N. Normally pneumatic test probes are used for function test tasks, and always when measuring points must be triggered individually. A wide range of accessories with distributors, reducers, connection cable glands etc. is available for setting up an extremely large number of contacting processes. The pneumatic test probes function automatically, so use without test adapters is also possible. In addition to standard types, there are models with an easy-replacement system and models which function as an opener. With the easy-to-use easy-replacement system, it is only necessary to replace the pneumatic cylinder together with the contacting unit – there is no need to release either the wiring or the pneumatic hose. The opener is an especially sophisticated type. Because of the special design in the barrel, at first it is closed. It is only when a component to be contacted is not present and the switch travel is exceeded that the test probe opens and does not pass on a signal.



Series 4004/G

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test
- Replacement without soldering

Mechanical Data

Center	4.00 mm/160 mil
Full travel	10.00 mm
Working travel	6.00 mm
Operating pressure	6 bar
Operating medium	Compressed air (filtered, oil-free)
Spring force at working travel	0.60 N

Electrical Data

Max. current rating	2.0 A
Typical continuity resistance	<=30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.40 mm
HGW 2372	3.41 mm

Tip style · Diameter · Plating



BST1	C	G	V
1.50 Rh	2.50 Rh	1.30 Rh	1.00 Rh


4004/G




H 4004/GR



H 4004/GR-L



L 4000



How to order:

4004/G - BST1 - 0.6 N - Rh - 1.5

1. Series 2. Threaded design 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter

Series 4004

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

Mechanical Data

Center	4.00 mm/160 mil
Full travel	10.00 mm
Working travel	6.00 mm
Operating pressure	6 bar
Operating medium	Compressed air (filtered, oil-free)
Spring force at working travel	1.50 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<=30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.40 mm
HGW 2372	3.41 mm

Tip style · Diameter · Plating



A	BST1	G
3.00 Rh	2.00 Rh	1.30 Rh


4004

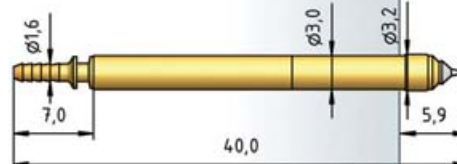


4004...-L



L 4000



H 4004

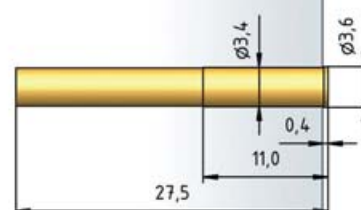

How to order:

4004 - BST1 - 1.5 N - Rh - 2.0 -L
1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. For connection of L 4000

Series 4005

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

Mechanical Data

Center	3.50 mm/138 mil
Full travel	10.00 mm
Working travel	6.00 mm
Operating pressure	6 bar
Operating medium	Compressed air (filtered, oil-free)
Spring force at working travel	0.80 N

Electrical Data

Max. current rating	2.0 A
Typical continuity resistance	<=30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

Tip style · Diameter · Plating



BST1	C	G
1.50 Rh	2.50 Rh	1.30 Rh


4005

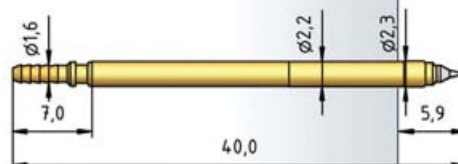


4005...-L



L 4000



H 4005

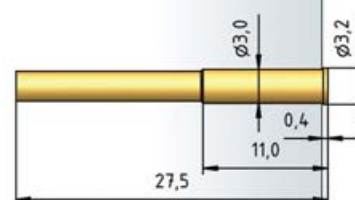

How to order:

4005 - BST1 - 0.8 N - Rh - 2.0 -L

1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. For connection of L 4000

Series 4006

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

Mechanical Data

Center	3.00 mm* without Receptacle = 2.54 mm/120 mil
Full travel	10.00 mm
Working travel	6.00 mm
Operating pressure	6 bar
Operating medium	Compressed air (filtered, oil-free)
Spring force at working travel	0.60 N

Electrical Data

Max. current rating	2.0 A
Typical continuity resistance	<=30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	2.40 mm
HGW 2372	2.41 mm

Tip style · Diameter · Plating



BST1	C	G	V
1.50 Rh	2.50 Rh	1.30 Rh	1.00 Rh


4006




4006...-L



L 4000



H 4006

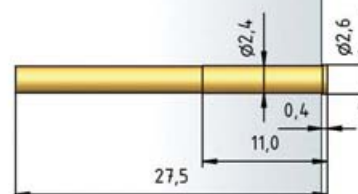

How to order:

4006 - BST1 - 0.6 N - Rh - 2.0 -L
1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. For connection of L 4000

Series 4034

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test
- „Opener“ type

Mechanical Data

Center	4.00 mm/160 mil
Full travel	10.00 mm
Working travel	5.00 mm
Switching travel	6.00 mm
Operating pressure	6 bar
Operating medium	Compressed air (filtered, oil-free)
Spring force at working travel	1.60 N
Spring force at switching travel	1.50 N

Electrical Data

Receptacle - tip

Max. current rating	3.0 A
Typical continuity resistance	≤ 30 mOhm

Hose connection - tip

Max. current rating	1.0 A
Typical continuity resistance	≤ 50 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	3.40 mm
HGW 2372	3.41 mm

Tip style · Diameter · Plating




A	BST1	G
3.00 Rh	2.00 Rh	1.30 Rh


4034

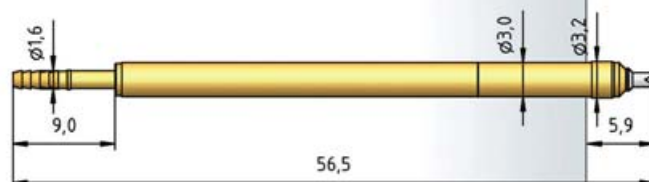

H 4004

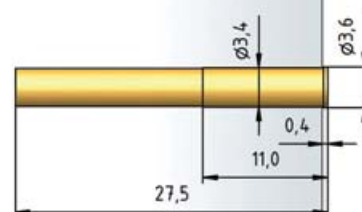

L 4000



How to order:

4034 - G - 1.6 N - Rh - 1.3

1 2 3 4 5

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter

Series	Center
5082	6.50 mm
5099	3.00 mm
5099.04	3.00 mm
5110	4.00 mm
1064	2.54 mm
5303	2.54 mm
5305	2.54 mm

Battery probes

Battery probes – also known as interface pins – are used everywhere it is necessary to charge rechargeable batteries, mobile equipment such as scanners, card readers, communication devices, etc. In many cases, they are also used to connect two PCBs. In addition to many standard products, PTR specialises in customer-specific solutions. As a result of the company's considerable experience in the manufacturing of injection moulding tools for the connection terminal sector, PTR offers complete solutions including plastic carriers, tape-and-reel, and "pick & place" pads. We develop professional solutions together with our customers, and then implement them precisely.



Series 5082

- Sturdy design
- For use in tough conditions
- Spring forces up to 8.0N

Mechanical Data

Center	6.50 mm/256 mil
Full travel	4.00 mm
Working travel	3.20 mm
Pre-loaded spring force	0.20/0.40/1.00/ 0.80/1.60 N
Spring force at working travel	0.60/1.50/3.00/ 4.00/8.00 N

Electrical Data

Max. current rating	5.0...8.0 A
Typical continuity resistance	<=30 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, gold-plated
Plunger	Steel/Brass
Receptacle	Brass, gold-plated

Recommended diameter of drill

With receptacle	5.59...5.60 mm
Without receptacle	4.97 mm


Tip style · Diameter · Plating

				
B1D	C	D	E1D	G
4.00 Au	4.00 Au	4.00 Au	4.00 Au	4.00 Au

5082

H 5082

ZRH 5082/3

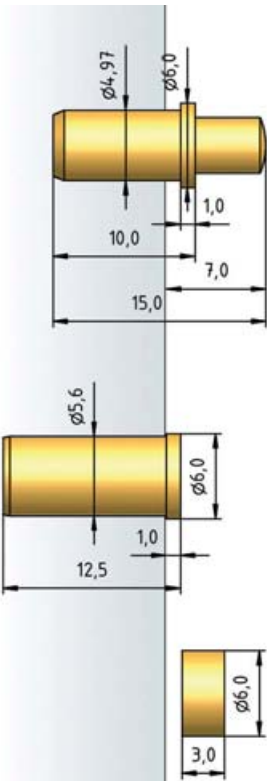

How to order:

5082 - **D** - **3.0 N** - **Au** - **4.0 M**
1 **2** **3** **4** **5** **6**

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for Ms)

Series 5099

- Short, compact size
- Board-to-board contacting
- For use in charging units

Tip style · Diameter · Plating

			
D	D	G	V
1.00C Au	1.30C Au	1.30C Au	1.30C Au

Mechanical Data

Center	3.00 mm/120 mil
Full travel	1.20 mm
Working travel	1.00 mm
Pre-loaded spring force	0.30/0.50/0.30 N
Spring force at working travel	0.60/1.00/2.00 N

Electrical Data

Max. current rating	5.0...8.0 A
Typical continuity resistance	<=10 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill

With receptacle

HP 2361.1 (Trolitax)	2.29 mm
HGW 2372	2.30 mm


Without receptacle

HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm

5099

H 5099-25

H 5099-50

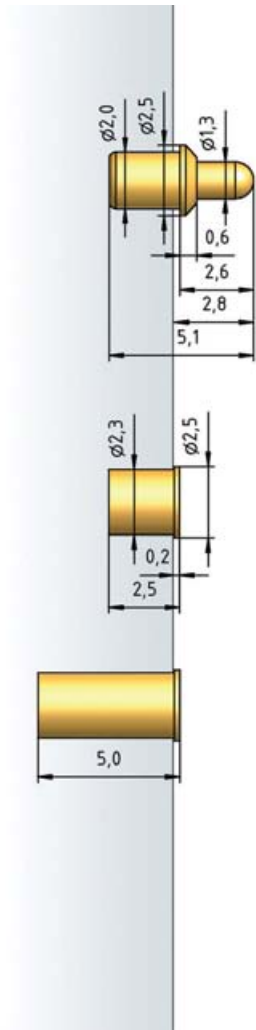

How to order:

5099 - D - 2.0 N - Au - 1.3 C
1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 5099.04

- Short, compact size
- Board-to-board contacting
- For use in charging units

Tip style · Diameter · Plating



D4

1.30C Au

Mechanical Data

Center	3.00 mm/120 mil
Full travel	4.00 mm
Working travel	3.30 mm
Pre-loaded spring force	0.15/0.25 N
Spring force at working travel	0.50/2.00 N

Electrical Data

Max. current rating	5.0...8.0 A
Typical continuity resistance	<=20 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill


With receptacle

HP 2361.1 (Trolitax)	2.29 mm
HGW 2372	2.30 mm


Without receptacle

HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm

5099.04

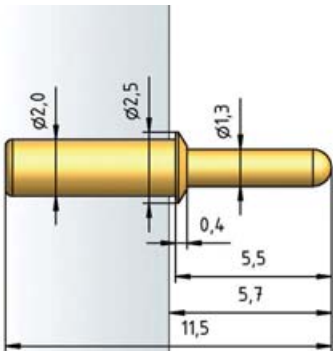

H 5099-25



H 5099-50



How to order:

5099.04 - D4 - 2.0 N - Au - 1.3C

1. Series 2. Variant 3. Tip style 4. Contact pressure 5. Tip plating
6. Tip diameter 7. Tip material (only for CuBe)

Series 5110

- Short, compact size
- Board-to-board contacting
- For use in charging units

Mechanical Data

Center	4.00 mm/160 mil
Full travel	3.50 mm
Working travel	2.80 mm
Pre-loaded spring force	0.25/0.30/0.45/ 0.50/1.00 N
Spring force at working travel	0.80/1.20/1.50/ 2.50/3.50 N

Electrical Data

Max. current rating	10.0 A
Typical continuity resistance	<=10 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated

Recommended diameter of drill


HP 2361.1 (Trolitax)	2.64 mm
HGW 2372	2.65 mm

Tip style · Diameter · Plating


				
C	D1	D	D	E
2.30C Au 3.50C Au	2.30C Au	2.30C Au	2.03C Au	2.30C Au

	
F	K2
2.30C Au	2.30C Au


5110/S

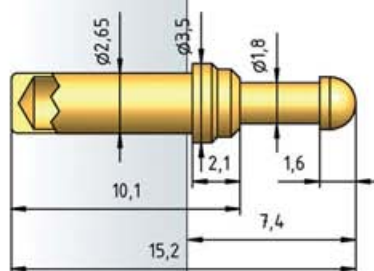


5110-K2

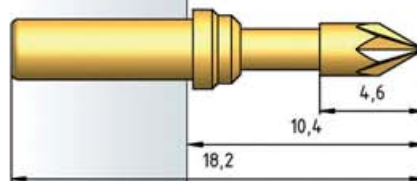


5110/S.02

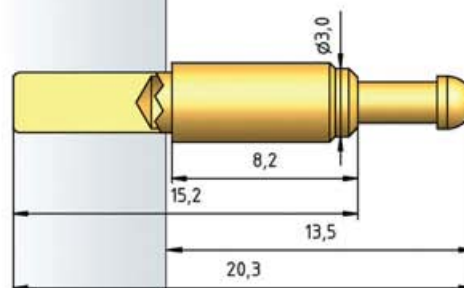

5110/1

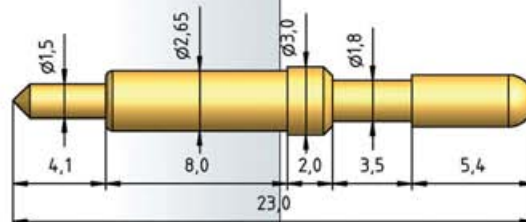

H 5110

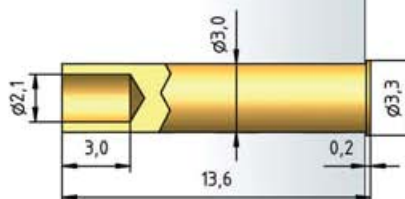

How to order:

5110 - D - 1.5 N - Au - 2.3 C
1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 1064

- Short, compact size
- Board-to-board contacting
- For use in charging units

Mechanical Data

Center	2.54 mm/100 mil
Full travel	1.27 mm
Working travel	up to 1.27 mm
Pre-loaded spring force	0.20/0.35/0.35 N
Spring force at working travel	0.60/1.25/1.85 N

Electrical Data

Max. current rating	5.0 A
Typical continuity resistance	<= 185 mOhm

Materials

Barrel	Nickel silver, uncoated
Spring	Spring steel/Stainless steel, silver-plated
Plunger	CuBe
Receptacle	Nickel silver, uncoated

Recommended diameter of drill


HP 2361.1 (Trolitax)	1.70...1.75 mm
HGW 2372	1.70...1.75 mm

Tip style · Diameter · Plating


A	D	D	H	H
1.96 Au	1.96 Au	1.17 Au	1.96 Au	3.30 Au

H	H1	H1	H2
3.96 Au	1.57 Au	2.49 Au	1.96 Au


1064




1064-H




1064-H2




H 1064 L



H 1064 C



H 1064 W

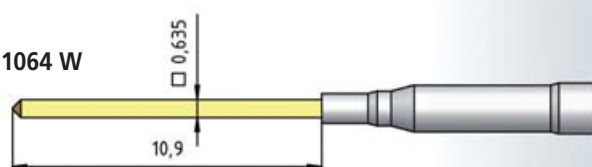

How to order:

1064 - D - 0.6 N - Au - 1.96 C

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Series 5303

- Short, compact size
- Board-to-board contacting
- For use in charging units

Tip style · Diameter · Plating



D

1.07 Au

Mechanical Data

Center	2.54 mm/100 mil
Full travel	1.40 mm
Working travel	0.70 mm
Pre-loaded spring force	0.25 N
Spring force at working travel	0.85 N


Electrical Data

Max. current rating	2.0...3.0 A
Typical continuity resistance	<= 20 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Spring steel, gold-plated
Plunger	Brass, gold-plated

5303

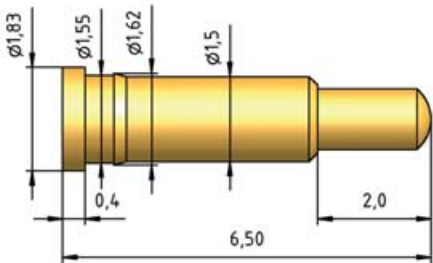

How to order:

5303 - D - 0.85 N - Au - 1.07 M

1 2 3 4 5 6

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for Ms)

Series 5305

- Short, compact size
- Board-to-board contacting
- For use in charging units

Tip style · Diameter · Plating



D
1.02 Au

Mechanical Data

Center	2.54 mm/100 mil
Full travel	1.00 mm
Spring force at full travel	1.00 mm
Pre-loaded spring force	0.40 N
Spring force at working travel	1.00 N


Electrical Data

Max. current rating	1.5 A
Typical continuity resistance	<=10 mOhm

Materials

Barrel	Brass, gold-plated
Spring	Stainless steel
Plunger	Brass, gold-plated

5305



How to order:

5305 - D - 1.0 N - Au - 1.02 M

1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for Ms)

Series	Center
5207 • 5207/G	4.00 mm

Coaxial test probes

Coaxial test probes – also known as Kelvin test probes – consist of two independent test probes which are insulated from each other. The inner conductor and outer probe operate and “give” independently of each other. Normally, the current flows via the outer probe, and the voltage drops are measured via the inner conductor. In addition to a standard type which can be plugged in, we also offer a threaded type which can be screwed in using a conventional tool (socket head wrench).



Series 5207 • 5207/G

- Four-pole measurement
- Compact design
- Screwable type
- Inner and outer conductor are sprung independently of each other

Mechanical Data • 5207 • 5207/G • Innenkontakt

Center	6.50 mm/256 mil
Full travel	3.50 mm
Working travel	3.00 mm
Pre-loaded spring force	0.80 N
Spring force at working travel	1.50 N

Mechanical Data • 5207 • 5207/G • Ringkontakt

Center	6.50 mm/256 mil
Full travel	2.50 mm
Working travel	2.00 mm
Pre-loaded spring force	3.00 N
Spring force at working travel	5.00 N

Electrical Data • 5207 • 5207/G • Innenkontakt

Max. current rating	1.0 A
Typical continuity resistance	<=10 mOhm
Typical insulating voltage	800 V

Electrical Data • 5207 • 5207/G • Ringkontakt

Max. current rating	6.0 A
Typical continuity resistance	<=10 mOhm
Typical insulating voltage	800 V

Materials

Barrel	CuBe, gold-plated
Spring	Spring steel, silver-plated
Plunger (inner)	Steel, gold-plated
Plunger (ring)	CuBe, gold-plated
Receptacle	Brass, gold-plated
Connector	Brass, tin-plated

Recommended diameter of drill

H5207

HP 2361.1 (Trolitax)	4.69 mm
HGW 2372	4.70 mm

H5207/G

HP 2361.1 (Trolitax)	5.49 mm
HGW 2372	5.50 mm

How to order:

5207 - D - 6.5 N - Au 1.0x 1.5 6.0 C
 1 2 3 4 5 6 7 8


1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Internal contact diameter 6. Tip height 7. Ring contact diameter 8. Ring contact material (only for CuBe)

Tip style • Diameter • Plating




D	T
1.00 x 1.50 Au	1.00 x 0.50 Au


5207

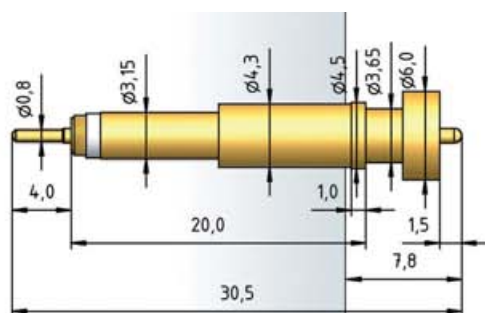


5207/G




H 5207



H 5207/G

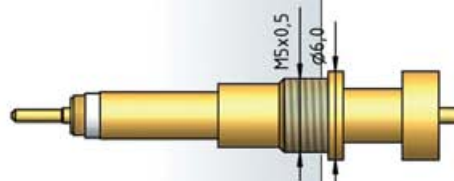


A 5207



Interface pins

Interface pins and interface test probes for various adapter interfaces are available for adapter development. As a specialist in turned parts, PTR also offers special types for the making of individual interfaces or also counter-contacts for battery applications.

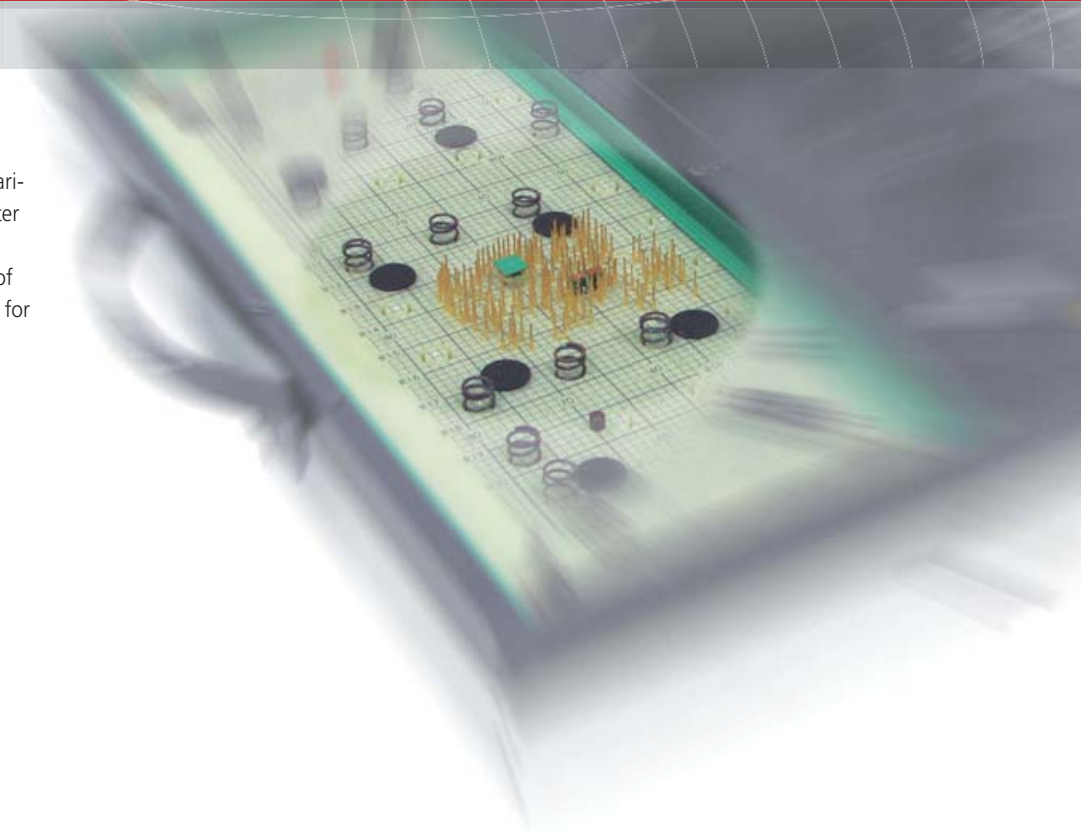

IF-Kontakte + Series 1016

- Universal field of application
- Contacting of assembled PCBs
- Interface pin

Mechanical Data • 1016 B1

Center	2.54 mm/100 mil
Full travel	3.10 mm
Pre-loaded spring force	0.55 N
Spring force at working travel	1.25 N

Mechanical Data • 1016 H2

Center	2.54 mm/100 mil
Full travel	4.20 mm
Pre-loaded spring force	0.40 N
Spring force at working travel	1.00 N

Electrical Data

Max. current rating	3.0 A
Typical continuity resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Bronze, gold-plated
IK	Brass, gold-plated

Recommended diameter of drill

HP 2361.1 (Trolitax)	1.67 mm
With pressed-in ring	1.75 mm
HGW 2372	1.69 mm
With pressed-in ring	1.76 mm

How to order:

1016 - B1 - 1.25 N - Au - 1.0C

1 2 3 4 5 6


1. Series 2. Tip style 3. Contact pressure 4. Tip plating 5. Tip diameter 6. Tip material (only for CuBe)

Tastkopfform · Durchmesser · Oberfläche




B1	H2
1.00C Au	1.00 Au


1016-B1

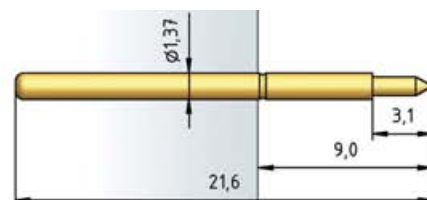

1016-H2

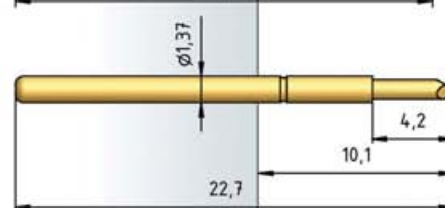

IK 6010.00

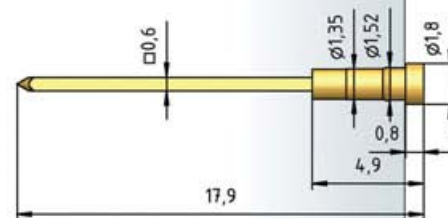


IK 6010.01



IK 6010.02




IK 6020.00

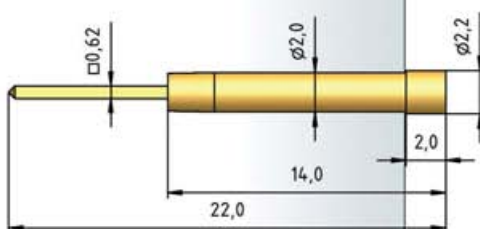

IK 6020.02



IK 6030.00

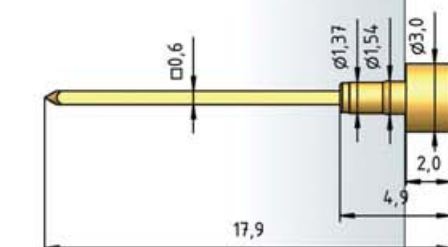

Tools and accessories

A wide range of accessories is available for the professional use of PTR test probes. These include receptacle insertion tools for the ICT test probe range and test probes for use in test modules for cable tests. In addition, we offer screwing tools for our series of test probes with thread, also available as torque screwdrivers. A spring force measuring device, especially suitable for use with the push-back probes needed for the cable test, completes this range. This device makes it possible to carry out the necessary monitoring of contact pressures and their constancy.



Insertion and extraction tools for test probes

Test Probe Type	Smallest spacing mm	Tipstyle diameter mm	Insertion tool	Extraction tool
1015	2.54	< 0.9	WFEA 1015	flat-nose-pliers
1015	2.54	0.9 ... 2.0*	WFEA 1015	WFEA 1015
1021, 2021	2.54	< 1.2	WFEA 1021	flat-nose-pliers
1021, 2021	2.54	1.2 ... 2.0*	WFEA 1021	WFEA 1021
1028, 2028, 2053	2.54	< 1.5	WFEA 1028	flat-nose-pliers
1028, 2028, 2053	2.54	1.5 ... 2.0*	WFEA 1028	WFEA 1028
1029, 2029	2.54	< 1.5	WFEA 1028	flat-nose-pliers
1029, 2029	2.54	1.5 ... 2.0*	WFEA 1028	WFEA 1028
1050, 1060	4.0	< 2.0	WFEA 1050	flat-nose-pliers
1050, 1060	4.0	2.0 ... 3.0*	WFEA 1050	WFEA 1050
3010/..	4.0	< 2.0	WFEA 1050	flat-nose-pliers
3010/..	4.0	2.0 ... 3.0*	WFEA 1050	WFEA 1050
3020/2	2.54	< 1.2	WFEA 1021	flat-nose-pliers
3020/2	2.54	1.2 ... 2.0*	WFEA 1021	WFEA 1021
3030	2.54	< 1.0	WFEA 3030	flat-nose-pliers
3030	2.54	1.0 ... 2.3*	WFEA 3030	WFEA 3030

* When to use bigger headdiameters please order for special tools!
When ordering please mention the test probe type!



Sleeve insertion tools Metal handle design

Receptacle	Sleeve insertion complete	insertion
H 1007	WHE 1200/07	WHE 1200/007
H 1008, H1008/E	WHE 1200/08	WHE 1200/008
H 1010	WHE 1200/12	WHE 1200/012
H 1012	WHE 1200/12	WHE 1200/012
H 1015, H 1015/G..	WHE 1200/15	WHE 1200/015
H 1021	WHE 1200/21	WHE 1200/021
H 1021/GV..	WHE 1200/21-V	WHE 1200/021-V
H 1025	WHE 1200/15	WHE 1200/015
H 1030	WHE 1200/30	WHE 1200/030
H 1050	WHE 1200/50	WHE 1200/050
H 1053/GRV, H1053/GVRV	WHE 1200/53-V	WHE 1200/053-V
H 1070	WHE 1200/75	WHE 1200/075
H 1075, H 1075/G-L	WHE 1200/75	WHE 1200/075
H 2021	WHE 1200/21	WHE 1200/021
H 2050	WHE 1200/50	WHE 1200/050
H 3014	WHE 1200/3014	WHE 1200/03014
H 3023	WHE 1200/3023	WHE 1200/03023
H 3024	WHE 1200/3024	WHE 1200/03024
H 3028/VR.01	WHE 1200/3028-1	WHE 1200/03028-1
H 5104..	WHE 1200/5104	WHE 1200/05104

Sleeve extraction tools Metal handle design

Receptacle	Sleeve insertion complete	insertion
H 1008	WHA 1200/08	WHA 1200/008
H 1012	WHA 1200/12	WHA 1200/012
H 1025	WHA 1200/25	WHA 1200/025



Sleeve insertion tools Plastic handle design

Receptacle	Sleeve insertion tool complete	Marking on tool shank
H 1015	WHE 137	1 ring
H 1021	WHE 165	2 rings
H 1021/G	WHE 165	2 rings
H 1042	WHE 300	4 rings
H 1050	WHE 265	3 rings
H 1060/G	WHE 265	3 rings
H 2021	WHE 165	2 rings
H 2050	WHE 265	3 rings
H 3010, H 3010-22, H 3010/S-23, H 3010/S-28	WHE 265	3 rings
H 3010/GS, H 3010/GW, H 3010/GW5, H 3010/GWR5	WHE 265	3 rings
H 3011	WHE 265	3 rings
H 3020, H 3020/S-26	WHE 165	2 rings
H 3020/GS-26, H 3020/GRS-26, H 3020/GW5, H 3020/GWR5	WHE 165	2 rings
H 3023/G, H 3023/5G, H 3023/ GWR5	WHE 165	2 rings

Screwing tools/Screw-in torques for threaded test probes


Important! If excessive torque is applied, this may destroy the threaded test probe (broken thread, buckling of barrel and/or receptacle, damage to the barrel square-end or screw slot), or it may destroy the screwing tool (cracking/splitting of the square end, damage to the square-end surfaces etc. → loss of grip)

Series	Smallest center	Greatest head diameter	Tool type	Screwing tools	Recommended screwing-in torque	Maximum screwing-in torque
1007/G	1.27	1.0	A	WFS 1007/G-1.27-1.0	1 Ncm	max. 2 Ncm
1010/G	1.5	1.0	A	WFS 1010/G-1.5-1.0	1 Ncm	max. 2 Ncm
1015/G	2.54	1.5	A	WFS 1015/G-2.54-1.5	2 Ncm	max. 3 Ncm
	2.54	1.8	A	WFS 1015/G-2.54-1.8	2 Ncm	max. 3 Ncm
1021/G, 1021/GV	2.54	1.8	A	WFS 1021/G-2.54-1.8	3 Ncm	max. 5 Ncm
	2.54	2.0	A	WFS 1021/G-2.54-2.0	3 Ncm	max. 5 Ncm
	3.0	2.5	B	WFS 1021/G-C2S-3.0-2.5-Z	3 Ncm	max. 5 Ncm
	3.5	3.0	B	WFS 1021/G-3.5-3.0-Z	2 Ncm	max. 3 Ncm
1042/G	all	all	D	Screwdriver for slotted screws 1.8x0.5	4 Ncm	max. 15 Ncm
1053/G	5.0	4.0	B	WFS 1053/G-5.0-4.0-Z	4 Ncm	max. 7 Ncm
	6.0	5.0	B	WFS 1053/G-6.0-5.0-Z	4 Ncm	max. 7 Ncm
1060/G	4.0	3.0	A	WFS 1060/G-4.0-3.0	4 Ncm	max. 15 Ncm
	5.0	4.0	B	WFS 1060/G-5.0-4.0-Z	4 Ncm	max. 15 Ncm
	6.0	5.0	B	WFS 1060/G-6.0-5.0-Z	4 Ncm	max. 15 Ncm
1060/G4	5.0	4.0	A	WFS 1060/G4-5.0-4.0	4 Ncm	max. 15 Ncm
1060/G5	6.0	5.0	A	WFS 1060/G5-6.0-5.0	4 Ncm	max. 15 Ncm
1070/G	5.0	4.0	A	WFS 1070/G-5.0-4.0	5 Ncm	max. 15 Ncm
1075/G	5.0	4.0	A	WFS 1070/G-5.0-4.0	5 Ncm	max. 15 Ncm
3010/2G 3010/2G5 3010/2GW 3010/2GW5 3010/10G				see 1060/G		
3011/2GS				see 1060/G		
3012/2GS (Plungers with pins)	all	all	D	Screwdriver for slotted screws 1.8x0.5	4 Ncm	max. 7 Ncm
3012/2GS (Plungers without pins)	4.0	2.6	A	WFS 3012-4.0-2.6	4 Ncm	max. 7 Ncm
3014/2G				see 1060/G		
3015/G	7.0	5.0	A	WFS 3015/G-7.0	5 Ncm	max. 15 Ncm
3020/2G, 3020/2GW5				see 1021/G		
3023/2GS				see 1021/G		
3024/2G				see 1021/G		
3028.01				see 1021/G		
3030/G3				see 1015/G		
4004/G				see 1060/G		
5104				see 1060/G		
5110/G				see 1060/G		
5203	2.54	2.0	A	WFS 5203-2.54-2.0	3 Ncm	max. 5 Ncm
	3.5	2.7	B	WFS 5203-3.5-2.7-Z	3 Ncm	max. 5 Ncm
5207/G	all	all	E	Hexagon socket key 2 mm	4 Ncm	max. 15 Ncm
5257/G				see 1021/G		
5265	3.0	2.3	A	WFS 5265-3.0-2.3	3 Ncm	max. 5 Ncm
	3.0	2.5	B	WFS 5265-3.0-2.5-Z	3 Ncm	max. 5 Ncm
	3.5	3.0	B	WFS 5265-3.5-3.0-Z	3 Ncm	max. 5 Ncm
	4.5	4.0	B	WFS 5265-4.5-4.0-Z	3 Ncm	max. 5 Ncm

A – closed square-head | **B** – claw (only for two-line assembly) | **D** – screwdriver for slotted screws | **E** – hexagon socket key
Other tools on request! When ordering tools, please specify the test probe to be assembled!

Screwing tools Screw-in test probes


Tool type

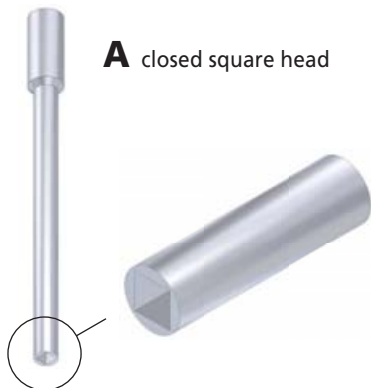


A closed square head



B claw (only for two-line assembly)

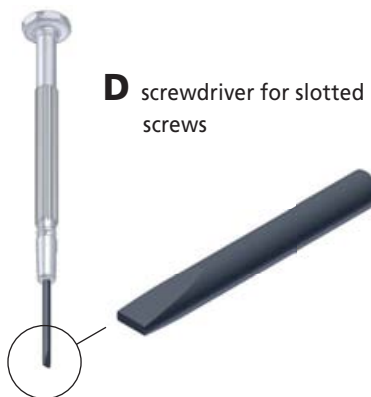

D screwdriver for slotted screws

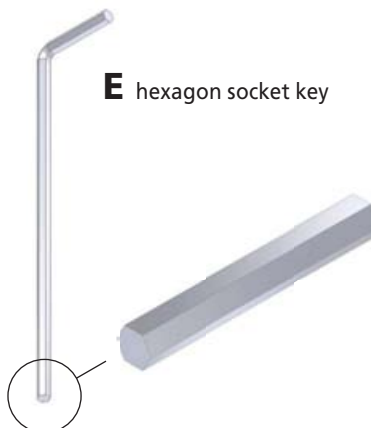

E hexagon socket key

Torque screwdriver



Type	Colour code	Sector
DMS 1	gold	1 Ncm
DMS 2	green	2 Ncm
DMS 3	blue	3 Ncm
DMS 4	red	4 Ncm


Digital force gauge FKT 50

Specifications

Display:	5-digits LCD display with light
Display direction:	Positive or Reserve direction, select by the push button on the front panel
Function:	Tension & Compression (Push & Pull)
Peak hold:	Will freeze the display value of the peak load (Max. load)
Zero:	Zero button can be operated both for "normal force" or Peak hold" operation
Unit select:	g / N / oz
Measure Capacity:	5 kg / 49,3 N / 176,40 oz
min. Display:	3 g / 0,03 N / 0,10 oz
Accuracy:	+/-0,4% bei 25 °C
Overload Capacity:	7,5 kg
Power Consumption:	Approx. 28 mA
Power Supply:	6 x 1,5 V AA
Dimension:	215 x 90 x 45 mm
Weight:	650 g with batteries



Dimension

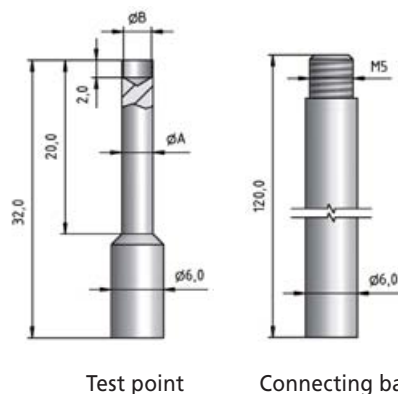

ØA mm	ØB mm	Center mm
2.1	1.6	2.54
2.6	2.1	2.54
3.6	3.1	4.0
4.6	4.1	5.0
5.6	5.1	6.0

PTR worldwide

Overseas representations for test probes

Austria

Wöhrleitner & Wöhrleitner GmbH
Eumigweg 7
A - 2351 Wiener Neudorf
Phone: +43 2236 62818 DW 1
Fax: +43 2236 320081 111
e-mail: roland@woehrleitner.at
www.woehrleitner.at

Brazil

Phoenix Mecano Comercial e Técnica Ltda.
Av. Prof. Alceu Maynard de Araujo, 185
BR - 04726-160 Sao Paulo
Phone: +55 11 564 341 90
Fax: +55 11 564 108 82
e-mail: vendas@phoenix-mecano.com.br
www.phoenixmecano.com.br

Czech Republic

Technik Partner s.r.o.
Zelenecská 882/1a, 19
CZ - 198 00 Praha 9-Hloubetin
Phone: +420 283 851 781
Fax: +420 283 852 775
e-mail: info@technikpartner.cz
www.technikpartner.cz

Denmark

Hans Folsgaard A/S
Theilgaards Torv 1
DK - 4600 Koge
Phone: 0045 43 208600
Fax: 0045 43 96 8855
e-mail: hf@hf.net
http://www.hf-uk.dk

France

Phoenix Mecano S.à.r.l.
76, rue du Bois-Galon
F-94121 Fontenay sur Bois, Cedex
Phone: 0033 1 53 99 50 59
Fax: 0033 1 53 99 50 79
e-mail: info.ptr@phoenix-mecano.com
http://www.phoenixmecano.fr

Great Britain

Peak Test Services Ltd.
152 Front Street, Chester-le-Street
GB - Co. Durham DH3 3AY
Phone +44/191/3 87 19 23
Fax +44/191/3 87 19 94
e-mail: peak.test@thepeakgroup.com
www.thepeakgroup.com

Hungary

Phoenix Mecano Kecskemét KFT
István király krt. 24
H-6000 Kecskemét
Phone: 0036 1 260 7730
Fax: 0036 1 261 3464
e-mail: info@phoenix-mecano.hu
www.phoenix-mecano.hu

Italy

Fast Elettronica Italiana S.p.A.
Via Rovetta, 35
20127 Milano
Phone +39.02.2610141
Fax +39.02.2822287
e-mail: sales@fastelettronica.com
www.fastelettronica.com

Mexico

Target Technology Inc.
Pensylvania 30,
Col. Nápoles C.P. 03810,
México D.F.
Phone +52/55/27356913
Fax +52/55/11078875
e-mail: electronic@targettech.com.mx

Netherlands

Elincom electronics BV
Klaverbaan 101-103
2908 KD Capelle aan den IJssel
Phone +31/10/26 40 270
Fax +31/10/26 40 275
e-mail: info@elincom.nl
www.elincom.nl

Poland

Semicon Sp. z o.o.
ul. Zwolenska 43/43A
04- 761 Warszawa
tel: (022) 615 73 71
fax:(022) 615 73 75
email: info@semicon.com.pl
www.semicon.com.pl

Singapore

Phoenix Mecano S.E. Asia
Pte. Ltd.
53 Ubi Ave 3
04-01, Colourscan Building
Singapore 408863
Telefon +65/674 916 11
Telefax +65/67496766/674 967 49
e-mail: pmsea@pmecano.com.sg
www.phoenixmecano.com.sg

Spain

Dotest S.L.
Gran Via de Carles III, 33-35
Baixos
E - 08028 Barcelona
Phone +34/93/4 90 55 60
Fax +34/93/4 11 82 44
e-mail: dotest@dotestsl.com

South Africa

WILTRON Agencies CC
P.O. Box 14 33
Hartbeespoort 0216
South Africa
Phone: 0027 12 244 0222 / 3
Fax: 0027 12 244 0224
e-mail: wiltron@global.co.za
http://www.wiltron-agencies.co.za

Switzerland

Phoenix Mecano Komponenten AG
Hofwisenstr. 6,
CH - 8260 Stein am Rhein
Phone: 0041 52 742 7500
Fax: 0041 52 742 7590
e-mail: info@phoenix-mecano.ch
http://www.phoenix-mecano.ch

Tunisia, Morocco, Algeria

Ep-Technology
Head quarter
29 Av. Ahmed Tilili
Industrial Zone Borj Cedria
2055 Ben Arous ; Tunisia
Tel: +216 79 412 889
Fax: +216 79 412 966
e-mail: Sales@ep-technologie.com
www.ep-technologie.com

Turkey

Elopar Ltd. STI.
Istanbul Caddesi
Kavaklı Köy Yolu
TR-Beylikdüzü
Kavaklı/Büyükcemece/Istanbul
Phone +90/212/8 75 19 40
Fax +90/212/8 75 04 73
e-mail: elopar@elopar.com.tr

USA

GTI Test Industries
P.O Box 50
Vale, NC 28168-0050
USA
Phone +704/7 36 04 56
Fax +704/7 36 05 65
e-mail: info@generaltest.com
www.gti-web.com

PTR Germany

Distributors in Germany for test probes



PTR Messtechnik GmbH & Co. KG

Gewerbehof 38
59368 Werne
Phone: 02389-79880
Fax: 02389-798888
e-mail: info@ptr.eu
www.ptr.eu



PTR Messtechnik GmbH & Co. KG

Gewerbehof 38
59368 Werne
Phone: 02389-79880
Fax: 02389-798888
e-mail: info@ptr.eu
www.ptr.eu



Heinrich J. Merck e.K.

Hasenhöhe 40b
22587 Hamburg
Phone: 040-870863-0
Fax: 040-870863-33
e-mail: kontakt@hj-merck.de
www.hj-merck.de



H. Biedermann GmbH Ingenieurbüro

Dr.-Albert-David-Str. 21
30938 Burgwedel
Phone: 05139-80095
Fax: 05139-4542
e-mail: info@h-biedermann.de
www.h-biedermann.de



PTR Messtechnik GmbH & Co. KG Vertriebsbüro Werne

Reimund Beumer
Gewerbehof 38
59368 Werne
Phone: 02389-7988164
Fax: 02389-798888
e-mail: rbeumer@ptr.eu



PTR Messtechnik GmbH & Co. KG Vertriebsbüro Frankfurt

Jürgen Bierent
Asterweg 6a
63322 Rödermark
Phone: 06074-94803
Fax: 06074-94833
e-mail: jbierent@ptr.eu




Herbert Altenberger OHG Industrievertretungen

Römerweg 7
76456 Kuppenheim
Phone: 07222-94540
Fax: 07222-945454
e-mail: info@altenberger.de
www.altenberger.de



IS Sichinger Vertriebs GmbH

Boschstr. 8
82178 Puchheim
Phone: 089-8649100
Fax: 089-86491022
e-mail: info@is-sichinger.de
www.is-sichinger.de

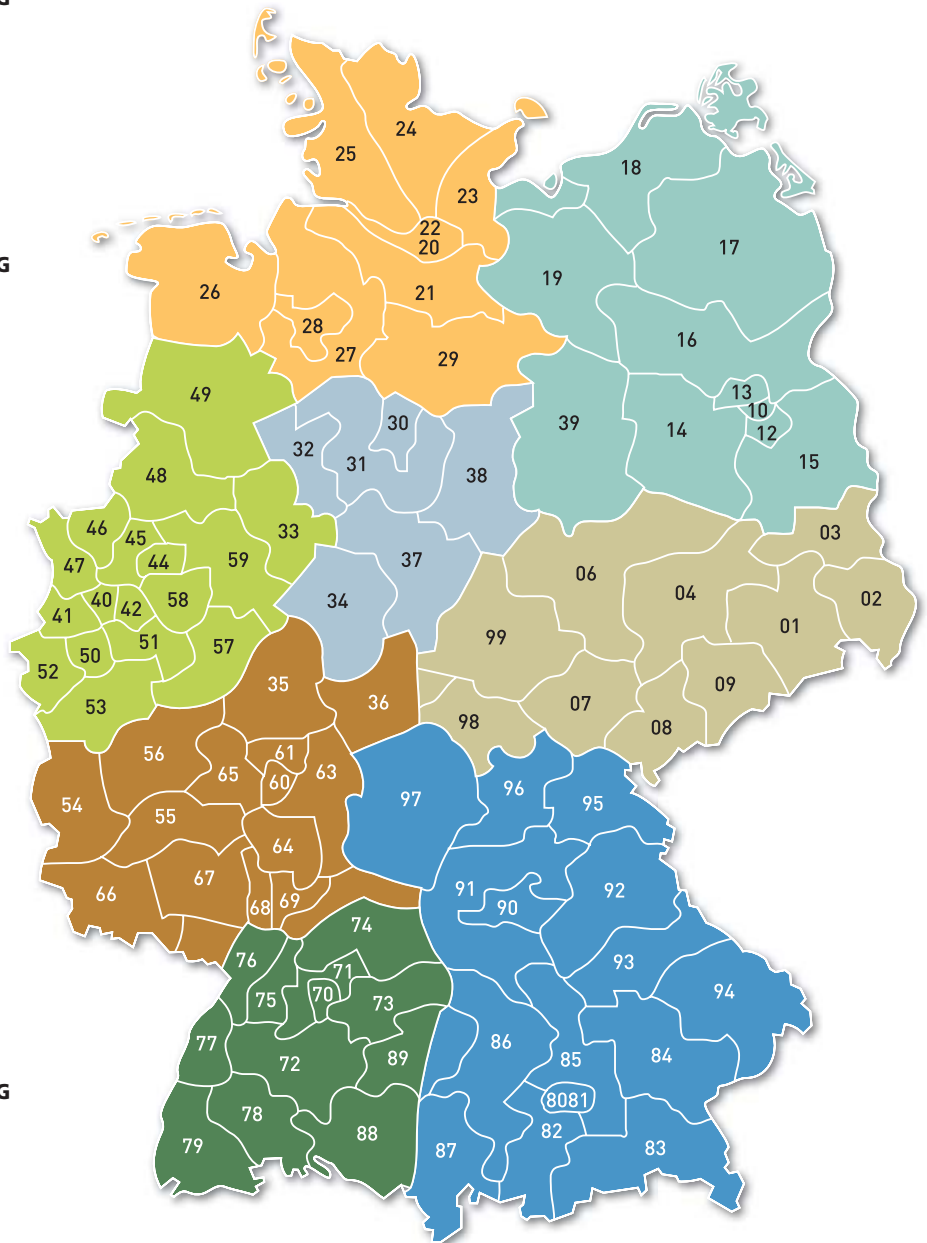

Imprint:

PTR Messtechnik GmbH & Co. KG · Gewerbehof 38 · 59368 Werne · Phone: 02389-79880 · Fax: 02389-798888 · info@ptr.eu · www.ptr.eu

Design: RAFFELT MEDIENDESIGN · **Databased-Publishing:** TUAREG design+communication · **Photos:** Tim Luhmann · **Print:** Druckerei Bruns

Copyright: PTR GmbH & Co. KG, 11/2010. This catalogue replaces all earlier editions. We reserve the right to make any changes which are in the interest of technical improvement.



A Phoenix Mecano Company

PTR Messtechnik GmbH & Co. KG · Gewerbehof 38 · 59368 Werne · Germany
Phone: +49 (0)2389/7988-0 · Fax: +49 (0)2389/798888
e-mail: info@ptr.eu · www.ptr.eu

Represented worldwide in more than 50 countries.

