


Finished Product Style(成品針類型)

PE75-V-7.2G(PO)

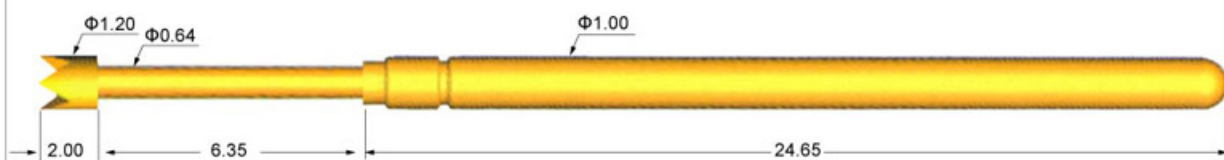

Technical Specifications

Recommended Minimum Center	:1.91mm(75mil)
Current Raring	:3amps, continuous
Contact Resistance	:30milliohms
Full Stroke	:6.35mm
Rated Stroke	:4.26mm
Spring Force	:203gf(7.2 oz)/227gf(8 oz)

技術規格簡介

建議採用的最小值中心距	:1.91mm(75mil)
額定電流	:3安培，連續
額定電阻	:30毫歐姆
滿衝程	:6.35mm
額定衝程	:4.26mm
額定彈力	:203gf(7.2 oz)/227gf(8 oz)

Materials

Contact Barrel	:Brass, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated or Gold Plated

材 料

接觸筒	: 黃銅，鍍金
彈 簧	: 琴綫，鍍金
杆 身	: 鍍銅或鋼，鍍鎳或鍍金

Tip Style(針頭類型)



How To Order: Spring Contact Probe

PE75	V	7.2	G
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]

Series: PE75
Tip Style: B(PO), K6(PO), J(PO), U3(PO), U(PO), IT(PO)
Spring Force: 7.2 oz

如何訂購：彈弓測試針

PE75	V	7.2	G
系列	針頭類型	彈力(oz)	電鍍 (G-鍍金)

系列: PE75
頭型: B(PO), K6(PO), J(PO), U3(PO), U(PO), IT(PO)
彈力: 7.2 oz